June 1980 $2.00 U.S., $2.50 Canada

THE MAGAZINE FOR TRS-80* USERS

80 microcomputing T.M.


LIFE: Play the Game Pg. 38

Inside Level I: Learn how to better utilize its commands. **Pg. 96.**

Testing 1, 2, 3: Interface your 80 with test equipment. **Pg. 136.**

Computer Trainer: Helps you understand Assembly Language. **Pg. 118.**


Special Graphics Issue: Explore the full graphics potential of your system.

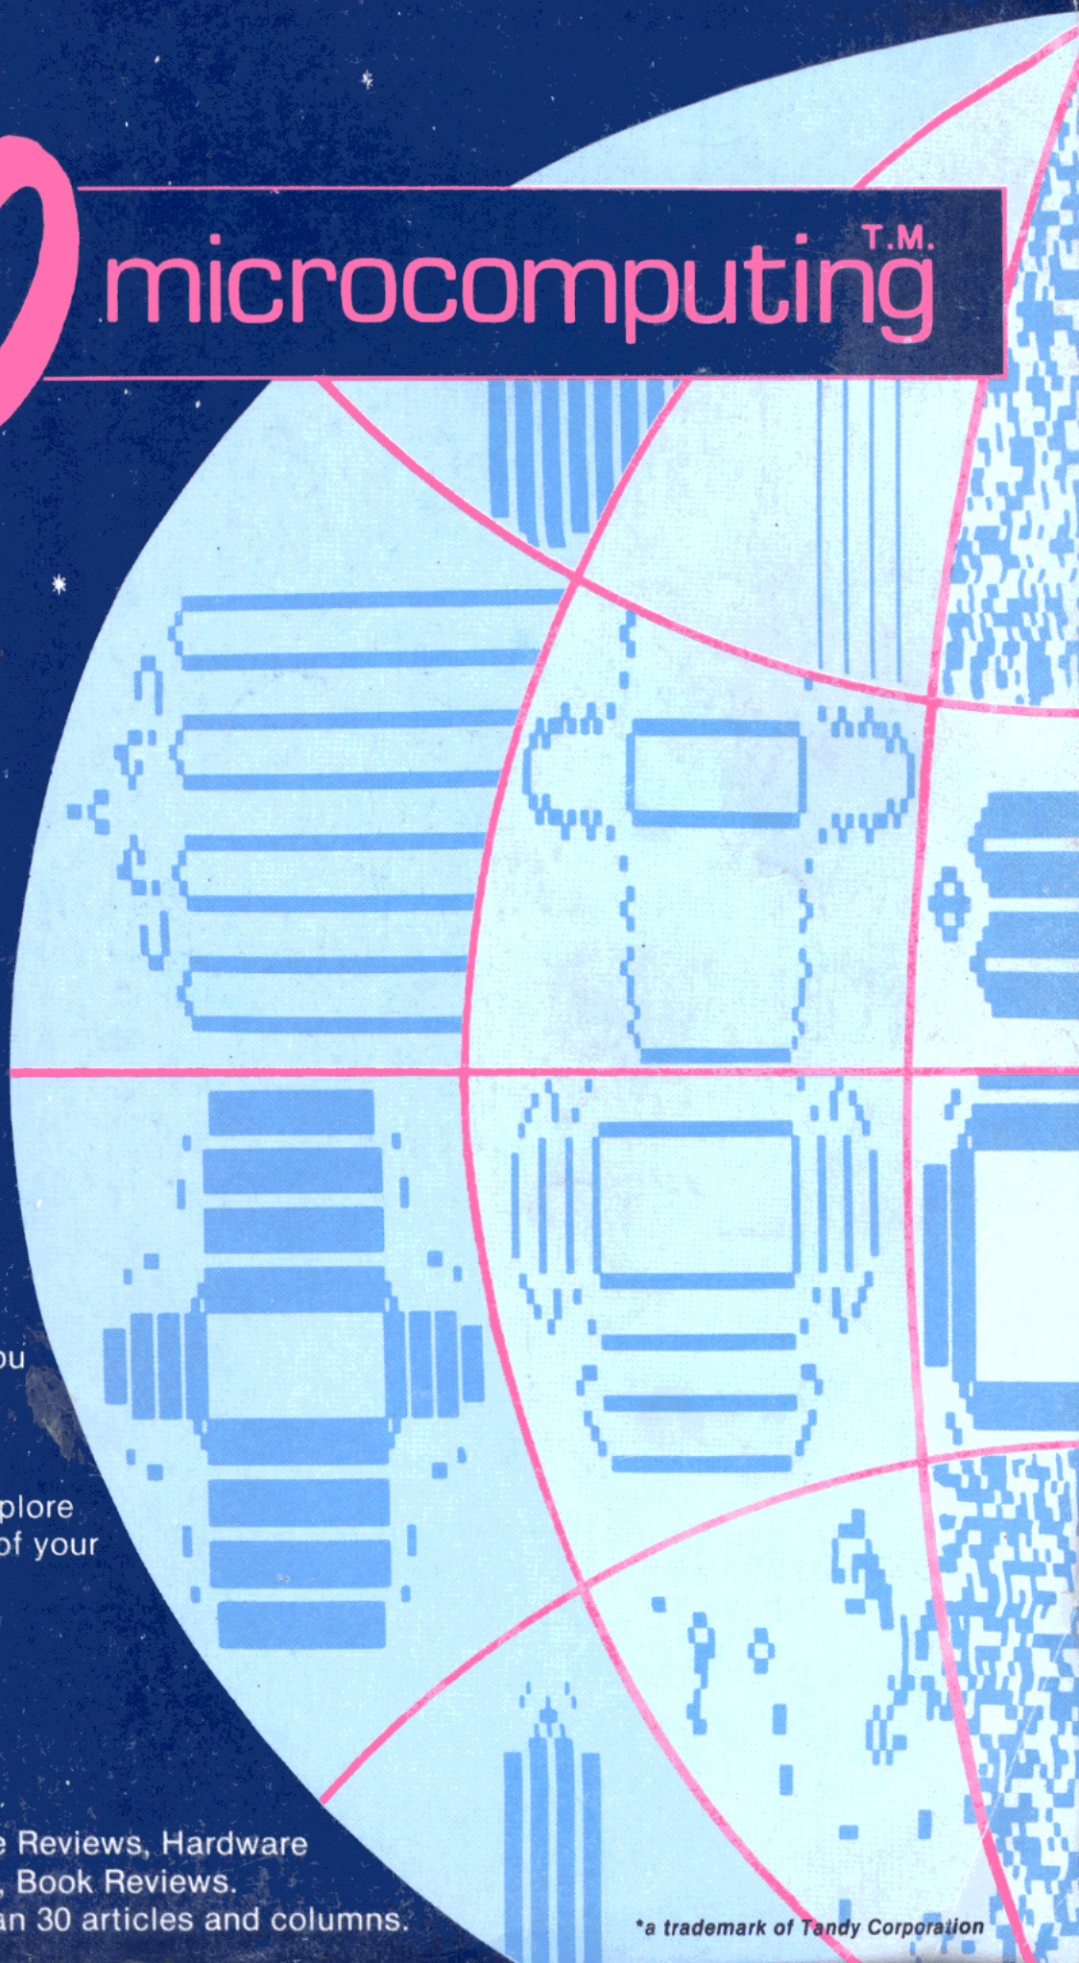

0 74470 65947 06

Plus:
Software Reviews, Hardware Reviews, Book Reviews.
More than 30 articles and columns.

*a trademark of Tandy Corporation

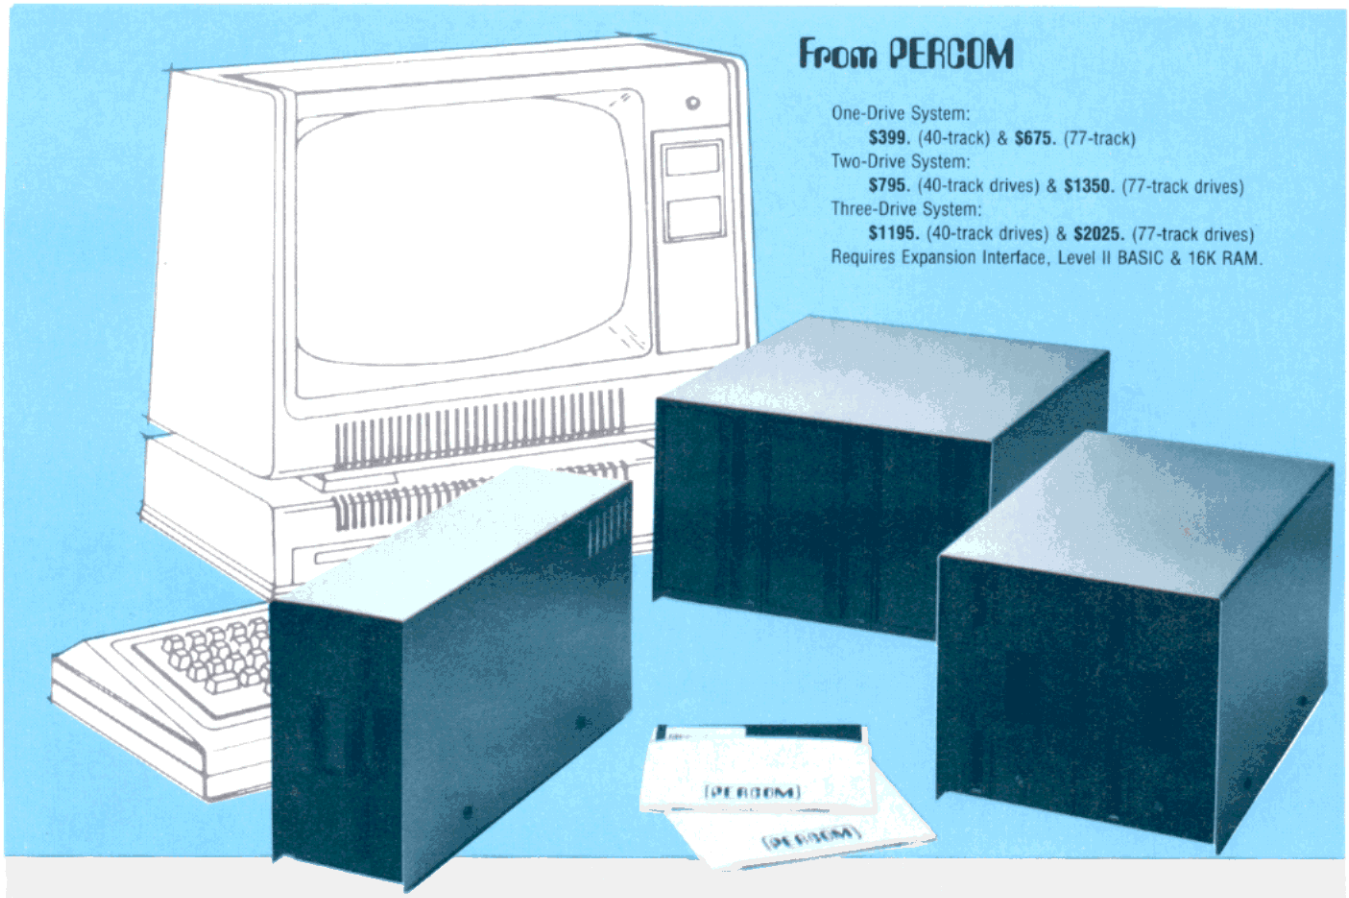

From PERCOM

One-Drive System:
$399. (40-track) & **$675.** (77-track)
Two-Drive System:
$795. (40-track drives) & **$1350.** (77-track drives)
Three-Drive System:
$1195. (40-track drives) & **$2025.** (77-track drives)
Requires Expansion Interface, Level II BASIC & 16K RAM.

Low Cost Add-On Storage for Your TRS-80*. In the Size You Want.

When you're ready for add-on disk storage, we're ready for you. Ready with six mini-disk storage systems — 102K bytes to 591K bytes of additional *on-line* storage for your TRS-80*.

- **Choose either 40-track TFD-100™ drives or 77-track TFD-200™ drives.**
- **One-, two- and three-drive systems immediately available.**
- **Systems include Percom PATCH PAK #1™, on disk, at no extra charge. PATCH PAK #1™ de-glitches and upgrades TRSDOS* for 40- and 77-track operation.**
- **TFD-100™ drives accommodate "flippy disks." Store 205K bytes per mini-disk.**
- **Low prices. A single-drive TFD-100™ costs just $399. Price includes PATCH PAK #1™ disk.**
- **Enclosures are finished in system-compatible "Tandy-silver" enamel.**

Whether you need a single, 40-track TFD-100™ add-on or a three-drive add-on with 77-track TFD-200™s, you get more data storage for less money from Percom.

Our TFD-100™ drive, for example, lets you store 102.4K bytes of data on one side of a disk — compared to 80K bytes on a TRS-80* mini-disk drive — and 102.4K bytes on the other side, too. Something you can't do with a TRS-80* drive. That's almost 205K bytes per mini-disk.

And the TFD-200™ drives provide 197K bytes of on-line storage per drive — 197K, 394K and 591K bytes for one-, two and three-drive systems.

PATCH PAK #1™, our upgrade program for your TRSDOS*, not only extends TRSDOS* to accommodate 40- and 77-track drives, it enhances TRSDOS* in other ways as well. PATCH PAK #1™ is supplied with each drive system at no additional charge.

The reason you get more for less from Percom is simple. Peripherals are not a sideline at Percom. Selling disk systems and other peripherals is our main business — the reason you get more engineering, more reliability and more back up support for less money.

In the Product Development Queue . . . a *printer interface* for using your TRS-80* with any serial printer, and . . . the *Electric Crayon*™ to map your computer memory onto your color TV screen — for games, animated shows, business displays, graphs, etc. Coming PDQ!

™ TFD-100, TFD-200, PATCH PAK and Electric Crayon are trademarks of PERCOM DATA COMPANY.
*TRS-80 and TRSDOS are trademarks of Tandy Corporation and Radio Shack which have no relationship to PERCOM DATA COMPANY.

PERCOM

PERCOM DATA COMPANY, INC.
211 N. KIRBY • GARLAND, TX. • 75042

To order add-on mini-disk storage for your TRS-80*, or request additional literature, call Percom's toll-free number: 1-800-527-1592. For detailed Technical information call (214) 272-3421.

Orders may be paid by check or money order, or charged to Visa or Master Charge credit accounts. Texas residents must add 5% sales tax.

Percom *'peripherals for personal computing'*



The easiest, least expensive way to generate spectacular multi-color graphics, sharp two-color alphanumerics: Your computer, a color tv set and the Percom Electric Crayon™.

Add the Electric Crayon™ to your system and your keyboard becomes a palette, the tv screen your medium.

You dab and stroke using one-key commands to create dazzling full-color drawings, eye-catching charts and diagrams.

Or you run any of innumerable programs. **Your own BASIC language programs** that generate dynamic pyrotechnic images, laugh-provoking animations.

From a combined alphanumerics-semigraphics mode to a high resolution 256- by 192-element full graphics mode, the microprocessor-controlled Electric Crayon™ is capable of generating **10 distinctly different display modes.**

Colors are brilliant and true, and up to eight are available depending on the mode.

As shipped, the Electric Crayon™ interfaces a TRS-80* computer. It may be easily adapted for interfacing to any computer or to an ordinary parallel ASCII keyboard.

But that's not all

The Electric Crayon is not just a color graphics generator/controller.

It is also **a complete self-contained control computer**. With built-in provision for 1K-byte of on-board program RAM, an EPROM chip for extending EGOS™, its on-board ROM graphics OS, and a dual bidirectional eight-bit port — over and above the computer/keyboard port — for peripherals. The applications are endless.

Shipped with EGOS™, 1K-byte of display memory and a comprehensive user's manual that includes an assembly language listing of EGOS™ and listings of BASIC demo programs, the Electric Crayon™ **costs only $249.95.**

Options include:

- LEVEL II BASIC color graphics programs on minidiskette: $17.95.
- A 34-conductor ribbon cable to interconnect the Electric Crayon™ to a TRS-80*: $24.95.
- RAM chips for adding refresh memory for higher density graphics modes: $29.95 per K-byte.
- Electric Crayon™ Sketchpad, a sketching grid of proportioned picture elements (pixels) in a tv aspect ratio. For 128 x 192 or 256 x 192 graphics modes. 11-inch by 17-inch, 25-sheet pads: $3.95 per pad.

SYSTEM REQUIREMENTS: the video circuitry of the Electric Crayon™ provides direct drive input to a video monitor or modified tv set. An internal up-modulator for rf antenna input may be constructed by adding inexpensive components to the existing video circuitry.

Prices and specifications subject to change without notice.

™ = trademark of Percom Data Company, Inc.

* = trademark of Tandy Radio Shack Corporation which has no relationship to Percom Data Company.

PERCOM

PERCOM DATA COMPANY, INC.
211 N. KIRBY GARLAND, TEXAS 75042
(214) 272-3421

✓258

Get into computer color graphics the easy, low-cost way with a Percom Electric Crayon™. Available at Percom dealers nationwide. Call toll-free, 1-800-527-1592, for the address of your nearest dealer, or to order direct if there is no Percom dealer in your area.

SPECIAL DELIVERY with EXTRACT

A 100% Machine Language Word Processor

TRS-80® + Electric Pencil® or Radio Shack's Scripsit®

We can't stop improving and expanding the capabilities of your TRS-80®! By using SPECIAL DELIVERY with EXTRACT and either Electric Pencil® or Radio Shack's Scripsit® you can get even more out of your computer. From just one program, you will get all this:

MAILFORM: Create MAILFILE: The ONLY complete name and address list entry/editor program written in machine language. Instant search on any field, complete cursor control, just fill in the form!

MAILRITE: Print letters written with either the Electric Pencil® or Radio Shack's Scripsit® inserting information from a MAILFILE into the letter for personalizing and addressing. You can send a personalized letter to one person then a different personalized letter to a second person with true typist quality from your fine printer. Features: Indents, Underscore, Bold Type, End of Page Stop, Address Envelopes, unlimited insertion from address list and More!

EXTRACT: Take out information from MAILFORM, the machine language mailing list. Find the names you need by Zip Code, Street Address, Gender, Age or any other way!

SORT: In-Memory sort on an entire address list using any field as the key. This program can sort an entire list in a matter of seconds!

LABEL: Prints labels from MAILFILE.

CONVERT: Make MAILFILE from RS mail list.

SPECIAL DELIVERY will run on your TRS-80® with TRSDOS,® NEWDOS® or any other TRS®-like DOS.

If you bought SPECIAL DELIVERY from us, send us the disk and we will update it to include EXTRACT for $25. If you haven't already taken advantage of our SPECIAL DELIVERY program, we'll send you the complete program including EXTRACT for just $125 (Disk). We can also send you the Electric Pencil® on Disk for $150.



Software Etc . . .
1839 Chamberlain Drive ✓42
Carrollton, Texas 75007.
Phone Orders: (214) 492-0515

Demand a Demonstration from your local Dealer or write for a brochure of our complete line of fine software.

80 microcomputing T.M. DATA

June 1980 Issue #6

APPLICATION
148 **Quiz Master.** Is this the answer? *Richard Eckert.*

BUSINESS
130 **Accountants Aid.** A workhorse worksheet. *James Sheats.*

GENERAL
38 **The Game of Life.** Play God for a day. *Dennis Kitsz.*
62 **Adventures in Roseland.** Interesting displays. *Allan Joffe.*
65 **Randomness.** Is your 80 really random? *Todd Carpenter.*
72 **Doodle Bug.** Pen and paper saver. *Daniel Bishop.*
78 **Kaleidopen.** Computerized kaleidoscope. *Robert Nicholas.*
82 **Real-time Graphics.** PEEK and POKE fun. *Richard Zidonis.*
96 **Inside Level I.** Baby brother grows up! *Robert Meushaw.*
106 **Double Size Graphics.** Larger than Life? *Bertram Thiel.*
118 **TRS-80 Trainer.** Display your registers. *William Colsher.*
124 **EDTASM Index.** Find references quickly. *Terry Kepner.*

HARDWARE
154 **Fuse Fix.** Save on repair charges. *William Winter.*

INTERFACE
111 **DECwriter Driver.** Terminal I/O made easy. *James Beauchamp.*
136 **Testing 1,2,3.** Check your measurements. *D. C. Nelson.*
142 **Teletype Interface.** El cheapo printout. *Peter Noeth.*

REVIEW
92 **Applications Software.** Micro packages. *Rod Hallen.*

SOFTWARE
116 **True or False?** Computerized pattern recognition. *John Krutch.*

STYLE
140 **Keyboard Interogation.** Key Information? *M. Yarbrough & J. Vosteen.*

UTILITY
88 **Hex Display.** Turn your FF into Decimal. *Dr. H. Campbell.*
132 **Buffer Analysis.** Display your ASCII. *Robert Chambers.*
134 **Display Formatting.** Tidy screens. *Allan Joffe.*
146 **CLOAD Assembly Language.** Get an autostart. *Arthur Baker.*

REGULARS
8 **80 Remarks.** *Wayne Green*
10 **Input.** *Why not you?*
12 **DEBUg.** *I. N. Error.*
14 **Reviews.** *Chris Brown.*
20 **80 Accountant.** *Michael Tannenbaum.*
20 **Captain 80.** *Bob Liddil.*
22 **The Assembly Line.** *William Barden, Jr.*
28 **80 Applications.** *Dennis Kitsz.*
32 **Unlimited 80's.** *Sherry Smythe.*
32 **Club 80.** *Ross Wirth.*
34 **NEWS.** *Nancy Robertson.*
162 **Preview.** *Next month in 80.*
162 **Advertisers Index.**

Cover by Clare McCarthy

Editor/Publisher
Wayne Green
Assistant Editor/Publisher
Jeff DeTray
Managing Editor
Jim Perry
Production Editor
Michael Comendul
Editorial Assistants
Emily Gibbs
Thomas Peabody
Nancy Robertson
Review Editor
Chris Brown
Production Manager
Noel Self
Assistant Production Manager
Robin Sloan
Production
Steve Baldwin
James Butler
Tedd Cluff
Bob Drew
Bruce Hedin
Kenneth Jackson
Clare McCarthy
Michael Murphy
Dion Owens
Patrice Scribner
Sue Symonds
John White
Typesetting
Barbara Latti
Sara Bedell
Mary Kinzel
Karen Podzycki
Photography
Bill Heydolph
Terrie Anderson
Reese Fowler
Executive Vice President
Sherry Smythe
Corporate Controller
Alan Thulander
Executive Assistant
Leatrice O'Neil
Accounting Manager
Knud Keller
Circulation Manager
Debra Boudrieau
Circulation
Barbara Block
Pauline Johnstone
Bulk Sales Manager
Ginny Boudrieau
European Marketing
Reinhard Nedela
Australian Distributor
Rudi Hoess
Advertising
603-924-7138
Kevin Rushalko, Mgr.
Penny Brooks
Nancy Ciampa
Marcia Stone
Jerry Merrifield
Harold Stephens

Manuscripts are welcome at *80 Microcomputing*, we will consider publication of any TRS-80 oriented material. Guidelines for budding authors are available, please send a self-addressed envelope and ask for "How to Write for *80 Microcomputing*." All material to be published will be paid for upon acceptance by the Editor. Address all submissions for the attention of the Managing Editor. Entire contents copyright 1980 by 1001001 Inc. No part of this publication may be reprinted, or reproduced by any means, without prior written permission from the publisher. All programs are published for personal use only, and may not be reproduced for others. All rights reserved.

80 Microcomputing (ISSN # applied for) is published monthly by 1001001 Inc., 80 Pine Street, Peterborough, NH 03458. Application to mail second class postage rate is pending at Peterborough, NH 03458 and at additional mailing offices. Phone: 603-924-3873. Subscription rates in the U.S. are $15 for one year and $40 for three years. In Canada $17 for one year and $46 for three years. In Europe please contact Monika Nedela, Markstr. 3, D-7778, Markdorf, W. Germany. In South Africa contact *80 Microcomputing*, P.O. Box 782815, Sandton, S. Africa 2146. Australian Distributor: Electronic Concepts, Rudi Hoess, 55 Clarence Street, Sidney 2000, Australia. All other foreign subscriptions $20 (one year only) surface mail. All U.S. subscription correspondence should be addressed to *80 Microcomputing*, Subscription Department, P.O. Box 981, Farmingdale, NY 11737. Please include your address label with any correspondence. Postmaster: Send form #3579 to *80 Microcomputing*, Subscription Services, P.O. Box 981, Farmingdale, NY 11737.

TRS-80 is a trademark of the Tandy Corporation.

META TECHNOLOGIES

★NEW★ MTC AIDS-III* ★NEW★

MODEL I . . .$69.95 MODEL II . . .$99.95

Introducing the latest addition to MTC's family of data management systems, AIDS-III. NO PROGRAMMING, easy to use. COMPLETE PACKAGE including demonstration application, documentation and MAPS-III (see below).

- Up to 20 USER-DEFINED FIELDS of either numeric- or character-type.
- CHARACTER-type fields may be any length (total: up to 254 characters).
- NUMERIC-type fields feature automatic formatting, rounding, decimal alignment and validation.
- Full feature EDITING when adding or changing records:
  - ENTER FIELD (can't type-in more characters than specified).
  - BACKSPACE (delete last character typed).
  - DELETE FIELD contents.
  - RESTORE FIELD contents.
  - RIGHT-JUSTIFY FIELD contents.
  - SKIP FIELD (to next or previous field).
  - SKIP RECORD (to next or previous record).
- SORTING of records is MACHINE CODE assisted.
  - 200 RECORDS (40 characters) in about 5 SECONDS.
  - ANY COMBINATION of fields (including numerics) with each field in ascending or descending order.
- SELECTION of records for Loading, Updating, Deleting, Printing and Saving is MACHINE CODE assisted.
  - Specify up to 4 CRITERIA, each using one of 6 RELATIONAL COMPARISONS.
  - LOAD or SAVE selected records using MULTIPLE FILES.
  - Example: Select records representing those people who live in the state of Colorado, but not in the city of Denver, whose last names begin with "F" and whose incomes exceed $9000.00.
  - Example: Select records representing those sales made to XYZ COMPANY that exceed $25.00, between the dates 03/15 and 04/10.

MAPS-III (MTC AIDS PRINT SUBSYSTEM), included at no charge, has the following features:

- Full AIDS-III SELECTION capabilities.
- Prints user-specified fields DOWN THE PAGE.
- Prints user-specified fields in titled, columnar REPORT FORMAT, automatically generating column headings, paging and (optionally) indentation.
- Can create a single report from MULTIPLE FILES.
- Prints user-defined formats for CUSTOM LABELS, custom forms, etc.

BELOW ARE TESTIMONIALS from owners of AIDS systems. These are absolutely authentic statements and are typical of the comments we receive.

"This program will do more for my business than all the other programs I have, combined."
David Wareham, Vice President (EDP), National Hospital and Health Care Services Inc.

"We have 32 different Data Base Management packages for the TRS-80. AIDS-III is easily the best. It also makes it easier for us to step up to our Model II since the package is available for both computers."
Jack Bilinski, President, 80 Microcomputer Services

"Your AIDS program is far and away the finest information management system that I've ever seen. I am currently using it to maintain a clear picture of the demographic data on all the kids in our residential treatment program and it is working for me superbly."
Frank Boehm, Director, Front Door Residential Treatment Program

- COMPATIBLE with AIDS-II data files and AIDS subsystems.
- Move up from AIDS-II and EXPAND to 20 field capability WITHOUT REENTERING DATA.
- AIDS-II (Model I or II) owners may UPGRADE FOR ONLY $25.00.

*WARNING! This program is written in BASIC and can be listed in the normal manner. Modification of program code is NOT RECOMMENDED due to its extreme complexity.

MTC AIDS-II

Ailing information? Doctor it up with AIDS-II. This Automated Information Directory System is user-defined, features user-specified fields and print/display formats, conditional record selection, updating of fields within records, sorting by any combination of fields, and much more! Unique "windowing" capability allows directories of unlimited size. Window size is typically 200 or more records in 32K. Can be used for mailing lists, client reference reporting, appointment "calendars", inventory records and other information systems. Easy to use. Defining a system takes about a minute. Formatting a report or defining a custom label, less than 30 seconds. Sorting 200 records takes less than 5 seconds. Add "subsystems" for additional capabilities.

MTC AIDS-II $49.95
For Model II $79.95

CALCULATION SUBSYSTEM (CALCS)

Use for report generation involving basic manipulation of numeric data, such as quantity & cost computations, balances carried forward and columnar totals. Expands capabilities with respect to inventory, accounting and other numeric-based information systems.

MTC CALCS $24.95
For Model II $39.95

MAILING/INFORMATION LIST SUBSYSTEM (MAILS)

Use for report & label generation involving formatting of primarily non-numeric data, such as custom, "N-up" and "N-copy" label forms, index-type report formatting, and trimmed field capabilities for selection & print. Expands AIDS-II with respect to client/product reference systems, mailing lists and other non-numeric information systems.

MTC MAILS $24.95
For Model II $39.95

RECORD/FILE ORGANIZATION EXECUTIVE (REFORGE)

Use for expanding, contracting or reformatting AIDS-II files. Convert random & sequential files to AIDS-II format. Use for converting mailing lists to AIDS-II. Includes MERGE & PURGE capabilities for combining smaller files into larger ones and removing duplicate records.

MTC REFORGE $24.95
For Model II $39.95

mTc-SHIRTS

HIGH-QUALITY, POLY-COTTON BLEND T-SHIRTS. White with Navy Blue neck and sleeve "ringers". MTC logo on sleeve. Top quality transfers of your choice on front.

Specify size (S.,M.,L.,XL.) and Transfer:

- META TECHNOLOGIES MAKES EVERY BYTE COUNT!
- DON'T TOUCH MY BITS! 01111110
- RAM it!
- MICRO LOVERS TAKE SMALLER BYTES!

mTc-SHIRTS. $5.95

MAILSORT(Model I) $19.95

MAILSORT replaces existing sort in Radio Shack Disk Mailing List" system. Sort by any combination of fields, such as NAME, within CITY, within STATE. Hi-speed in-memory routine sorts 300 records in approximately 60 seconds. Minimum 32K recommended. For use with old or new versions.

PEEK&POKE $14.95

Frustrated because PEEK and POKE have been removed from Model II BASIC?. Satisfy your curiosity with PEEK&POKE from MTC. Included are 8-bit and 16-bit (LSB, MSB) self-relocating machine language routines, instructions, and demo program.

Transfer PROGRAMS and DATA from MODEL I to MODEL II

TRAN-SEND

$49.95 by MTC

Requires MODEL II and MODEL I with disk & RS-232. Simple to use, not a kit - nothing else to buy. Complete with custom cable, 5¼" & 8" floppies, instructions. May be used over phone lines.

Custom Cable only $19.95

Suitable for use with Radio Shack* transfer program(ACT 0131)

MAKES EVERY BYTE COUNT

IN YOUR TRS-80® MODEL I OR MODEL II DISK SYSTEM

PROGRAMMING TOOLS

Buy 4, get 1 FREE
Any 5, $79.80
For Model II $119.80

TDAM $19.95
For Model II $29.95
Includes MTC QUE Card!

Having trouble with RANDOM FILES? With MTC's Table-Driven Access Method (TDAM) you'll never fret over FIELDing again. No knowledge of random access files is required. Insert the TDAM "interpreter" into any BASIC program and type in a few DATA statements describing the information in your files. TDAM does the rest! Reads and writes fields and records of any type (even compresses a DATE field into 3 bytes!). Features automatic file buffer allocation/deallocation, memory buffering, sub-record blocking/deblocking, and handles up to 255 fields per record. Super fast and super simple! Complete with TDAM interpreter, instructions and demo program.

DIVERGE $19.95
For Model II $29.95

Compares two BASIC program files, showing the differences between them. Identifies & lists lines which have been inserted, deleted, & replaced. Use for version control.

REBUILD $19.95
For Model II $29.95

Reorganize programs for adding program code, faster execution, readability. Much more than simple renumbering. Rearrange groups of statements within a program - automatically updates references to line numbers. Use with SUPERSEDE and MINGLE for maximum effect.

SIFTER $19.95
For Model II $29.95

Twelve in-memory high-speed sorts for use in any BASIC program: stable, non-stable, with/without tags, for numeric or string data. Random File Sort included. Some sorts written in machine code. Includes sort subroutines, demo programs and instructions. Relocate as needed with REBUILD.

SHRINK $19.95
For Model II $29.95

Makes Every Byte Count!. Make programs smaller and faster! Combines lines & removes unnecessary code including remarks, without altering program operation. Typically reduces program size 25% to 40%.

SUPERSEDE $19.95
For Model II $29.95

A "must have" for the professional programmer or the serious amateur. Probably one of the greatest time-savers available. Write programs in shorthand - change variable names - generate program documentation - use with REBUILD and MINGLE to build new programs from old ones.

MINGLE $19.95
For Model II $29.95

Merge up to 14 files (Program or Data) into a single file. Data files may be merged in ascending or descending sequence with the ordering based on a user-specified comparison field. A very handy utility for consolidating data files.

Single sided, Single density, Soft-sectored

DISKETTES

Verbatim 5¼-inch

$24.95 Box of 10

Quantity 10 Boxes $23.50
Hard-sectored (10-hole), Box of 10 ..... $26.95
8-inch FLOPPIES
Single-density, Box of 10 ..... $29.95
Double-density, Box of 10 ..... $39.95
PLASTIC LIBRARY CASES
5¼-inch or 8-inch diskette case $3.00

FACTORY FRESH, ABSOLUTELY FIRST QUALITY
Minimum order 1 box, NO order limit!

Complete for Model I with all utilities
Plus exclusive MTC QUE card!

NEWDOS +II

$99.95 by Apparat and MTC

40 TRACK VERSION $109.95

includes REF, RENUM, SUPERZAP, EDITOR/ASSEM., DISASSEM., DIRCHECK, and more! This is the original NEWDOS with all of Apparat's utility programs, plus any 2 MTC PROGRAMMING TOOLS (for Model I), of your choice. Includes exclusive MTC QUE (Quick User Education) card.

MTC QUE Card only $1.50

MTC TECH B.S.

Our exclusive Technical Bulletin Service reveals the inside story on the TRS-80® I & II. Sent by first class mail, bulletins are issued as the news breaks, not just once a month. Expensive, but worth it! No advertising or flyers, just pure Technical B. S.! Cancel any time - unused balance refunded. Free year-end subject index with 12-month subscription. Subjects have included "PEEK&POKE functions for Model II", "Machine Language Sort for String Arrays", "Tandy Marketing Plans", and "Level II Memory Locations". Subscriptions may be back-dated to obtain previous Bulletins.

1-Year Subscription
(Includes free index) $36.00
Monthly Subscription ..... $3.00/mo.

Let your TRS-80® Teach You

ASSEMBLY LANGUAGE

REMSOFT's unique package, "INTRODUCTION TO TRS-80® ASSEMBLY PROGRAMMING" includes ten 45-minute lessons on audio cassettes, a display program for each lesson providing illustration & reinforcement, and a text book on TRS-80® Assembly Language Programming. Includes useful routines to access keyboard, video, printer and ROM. Requires 16K - Level II, Model I.

REMASSEM-1 ..... $69.95

The perfect supplement for your NEWDOS+, from IJG, Inc.

"TRS-80 DISK AND OTHER MYSTERIES"

by Harvard C. Pennington

132 pages written in PLAIN ENGLISH packed with HOW TO information with details, examples and in-depth explanations. Recover lost files and directories, remove file protection, make BASIC programs unlistable. How to use SUPERZAP, recover from DOS errors and MORE!

TRS-80 DISK $22.50

All products guaranteed for replacement only. Prices, Specifications & Offerings subject to change without notice.

MOST ORDERS SHIPPED WITHIN ONE BUSINESS DAY

QUANTITY DISCOUNT INQUIRIES INVITED

WE ACCEPT
- VISA
- MASTER CHARGE
- CHECKS
- MONEY ORDERS
- C.O.D.

- Add $2.50 for shipping & handling
- $2.00 EXTRA for C.O.D.
- Ohio residents add 5½% sales tax.

TO ORDER CALL TOLL FREE
1-800-321-3552
IN OHIO call (216)289-7500 (COLLECT)

✓20

META TECHNOLOGIES CORPORATION

26111 Brush Avenue, Euclid, Ohio 44132

master charge
VISA

800430

TRS-80 and Radio Shack are registered trademarks of Tandy Corp.

✓Reader Service—see page 162

80 REMARKS

by Wayne Green

"As the size of the magazine increases, so does the postage involved in sending it to the subscribers."

My editorial on electronic mail brought quite a bit of response. To my knowledge there are at least three firms designing Electronic Mail Boxes (EMB), a unit that will plug into both your computer and your telephone.

Some questions have been raised about my proposal. First, I suggested EMB's use 1200 baud because I felt the currently used 300 baud was far too slow. It should be possible to connect and transfer a one page message all within one minute . . . and that requires at least 1200 baud.

Suggests 9600

A letter from Art Brothers, who runs a small phone company out in Utah, suggests we think in faster terms. He claims that it is possible to jam 9600 baud over a phone line using compression and expansion techniques. Undoubtedly a lot of you readers are far more experienced with this than I, so we need some articles on the subject. A 9600 baud system which would work over any conceivable phone connection over long distance lines with 100 percent transfer of a message would be wonderful. If this is even remotely possible, we should work for it right now and not be forced to change standards in a year or two.

We also need to establish protocols for signaling over the lines. Then, we need a handshake protocol to initiate the transfer of the message and a protocol to assure that the message has been received 100 percent error free. We can use error correcting codes for this to some advantage, but we will still need a system for checking the received copy . . . and acknowledging it's receipt.

One suggestion is that the EMB automatically forward a received message, if desired. Perhaps we could get a dump of waiting messages from any remote terminal. Even if the first systems do not have these features, I think they will be along soon enough.

Received messages will have to be stored on tape or disk automatically, so that the system will be ready for the next message. And the software must be flexible enough that you can be writing messages to be sent at the same time as the system is receiving one.

Would we want a duplex switch on the system for immediate two-way communications similar to a Telex? Why not? A special signal might indicate that the recipient of the message is on the line for immediate answer.

The software should include a word processor so we can write our messages on the tube and edit them. It does not have to have all of the sophistication of a full fledged word processor, complete with paragraph movers and key word finders. If it does just a little better than a Teletype machine, it will be fine for this.

If there is enough interest in this, I will be glad to organize a symposium for individuals and firms interested in exchanging information so that we may standardize protocols. I think that between *80 Microcomputing* and *Kilobaud Microcomputing* I may have enough clout to make sure that the best system becomes a standard.

I believe that Radio Shack will be selling on the order of half a million computers this year and I will be disappointed if at least 75 percent of those buyers do not get an EMB to go with their system.

Research Done

In order to get this project moving, we first have to do the research and development. This means that the ball is in the air. Most of the technical development has been done and the results published in one or more magazines.

Cover Photos

Would you like the prestige of getting a photo on the *80 Microcomputing* cover?

Subject? Generally we like to have some photo which shows the TRS-80—either model —in use . . . hopefully with some interested people around.

Submissions will do best if they are larger than 35mm. We prefer the 6×7 cm or larger format, so we will have clear and sharp cover pictures.

Photographers should keep their eyes open for interesting applications of the Tandy computer system. Radio Shack stores are not exempt from the competition and a credit line on the photo will not hurt business one bit.

Oh, I almost forgot . . . we pay up to $100 for cover photos.

The Price Goes Up

When a publisher starts a new magazine, it is always a gamble. Of course I try to keep the gamble to a minimum by knowing my trade better than most people. I've gotten rather good at starting new magazines and having them succeed, right from the first issue. In 1975 it was *Byte*, in 1977 it was *Kilobaud Microcomputing* and now, *80*.

As the size of the magazine increases, so does the postage involved in sending it to the subscribers or in shipping copies to the newsstands. That is why cover prices and subscription prices tend to go up. Of course inflation makes matters even worse. In order to be sure that *80* got a good start I set the cover price and subscription rate much lower than normal for a technical magazine of its quality. There are several higher priced magazines with a lot less interesting material on the market.

Starting with the July issue the cover price of *80* will be $2.50 and the subscription rate within the U.S. will be $18 per year. A three year subscription is currently only $40. This will be going up to $45 with the July issue.

If you follow the normal pattern of procrastination, you'll do me a big favor and pay the higher price. In order to "save money" you'll buy at the one year rate and we'll do even better. I expect the cover price to go up again, possibly by the end of this year, to $2.95, with the subscription rate going to $25 for one year and $53 for three years. Why not wait and see for yourself?

See You in Hong Kong

You have always wanted to go to Asia, but you just haven't had the proper push to get you going. I'm pushing . . . so get out your checkbook and enjoy the ride.

Last fall I went on an IEEE sponsored tour of the Far East and had a fantastic time. The tour is running again and you'll want to come along and see Asia. it will be from October 2-22nd and the cost is just over $2,000 each, a wonderful bargain. That includes all plane fares, buses, hotels, banquets and sightseeing trips.


Quite a few microcomputer addicts and industry people make this trip, so it will be much more fun than going with undertakers or pipefitters. The trip coincides with consumer electronic shows in Tokyo, Taipei, Seoul and Hong Kong. Unless you are made of sterner stuff, you will find yourself getting enthused over importing some of the electronic and computer equipment that smaller Asian firms are making.

Or you may want to take advantage of the low cost production facilities for some product you are making or would like to make.

We'll plan on getting together with the president of the Hong Kong TRS-80 club, which had over 300 members last year. We'll also visit Akihabara in Tokyo, a section of town with hundreds of electronic stores.

If you're interested, drop me a line and ask for further information. I think we'll try for two tables of computerists—that's about 24 of us—so don't procrastinate. The address is: Asia Tour, c/o *80 Microcomputing*, Peterborough, NH 03458 ■

More for Less.

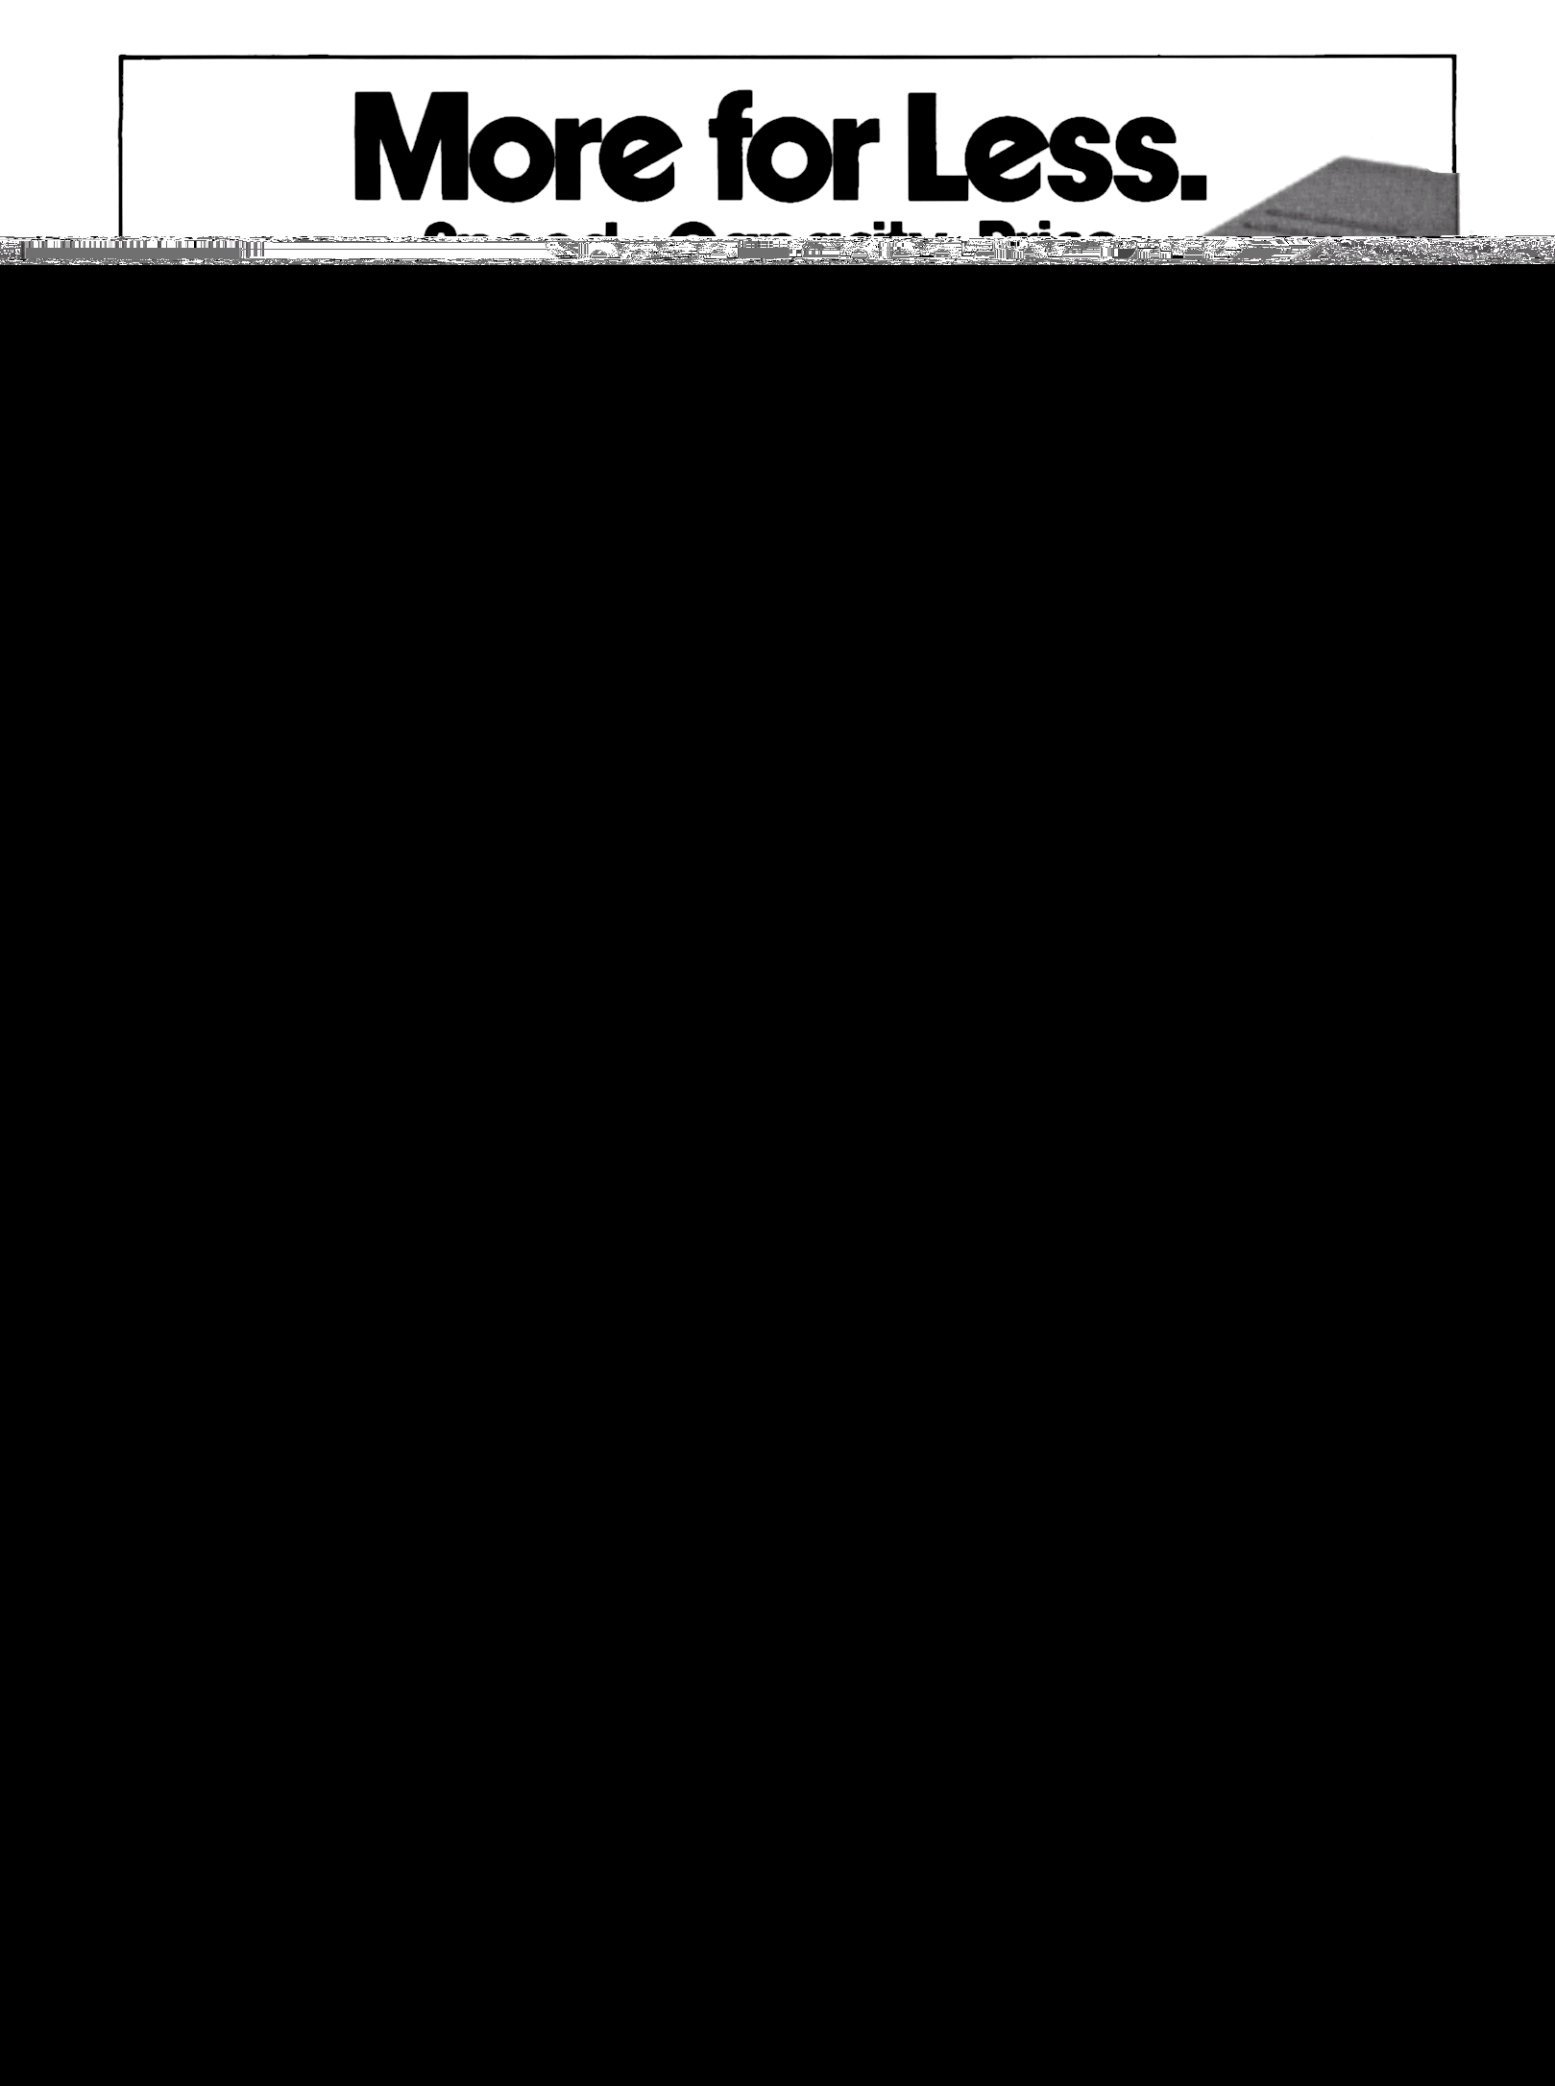

Bigger Is Better.

Expandable storage. Greater Versatility.

The Vista Model II* Disk Expansion System provides one, two or three drives, and adds up to 1.5 million bytes of storage.



You say you want more disk storage, more programming versatility . . . at a reasonable price. Say no more. Our Vista Model II Disk Expansion System may be just the answer for you. Choose from 1, 2 or 3 drives, already mounted. Each additional disk drive will add about 1.5 million bytes of on-line storage to your system. Buy only what you need now. As your needs grow, you can continue to expand your capacity by adding another drive. It's that simple.

But the best part we've saved for last. The price. It's cheaper than Radio Shack, yet our Model II will do everything Radio Shack's expansion system can do. The only difference is our Model II will keep on working long after most others have stopped. That's why we are justifiably proud of our product's high reliability. And our **120-day warranty**. Actually, it's not hard to stand behind a product — that works — if you know what we mean.

*Model II is a registered trademark of Radio Shack, a Tandy Corporation.

COMPARE OUR INTRODUCTORY LOW PRICES

1-drive Expansion System	$1,000	3-drive Expansion System	$2,100
2-drive Expansion System	$1,550	Additional Drives Only	$ 525

NO WAITING • IMMEDIATE DELIVERY.

NAME _____
ADDRESS _____
CITY _____ STATE ___ ZIP _____
TELEPHONE ( ) _____
OPTIONAL
COMPANY AFFILIATION _____
TITLE _____
INTENDED APPLICATION _____

PLEASE ☑ ONE:
☐ CHECK OR MONEY ORDER ☐ CREDIT CARD ☐ C.O.D.
PLEASE CHARGE MY CREDIT CARD: _____
☐ MASTER CHARGE ☐ BANK AMERICARD VISA
CARD NO. _____
EXPIRATION DATE _____
PRINT EXACT NAME OF CARD HOLDER _____
SIGNATURE _____

Item	Quantity	Price

Subtotal _____
Calif. Res. add 6% sales tax _____
Per-Unit Shipping and Handling _____
($5.00 UPS - $7.50 UPS Blue) _____
Total _____

Vista

The Vista Computer Company 1401 Borchard Street • Santa Ana, California 92705 • 714/953-0523 ✓65

✓Reader Service — see page 162

CLUB 80
by Ross Wirth

"Someone recently estimated that there was a backlog of $200 billion . . . in software projects."

A new Pascal special interest group is being formed this month. The coordinator is Richard J. Bonneau, PhD (6 Tanglewood Dr., Shrewsbury, MA 01545). Richard is a computer software consultant and feels more people should be made aware of the potential benefits of higher-order languages. If you have an interest in Pascal pass your thoughts and ideas along to Richard.

Do the FORTRAN, FORTH, COBOL and LISP users out there desire a special interest group for their language? All it takes is one person to take the lead and serve as the coordinator.

Business Special Interest Group

A local business group is forming in the central coast area of California. The local coordinator is John J. Duemler (128 S. Elm St., Arroyo Grande, CA 93420). John works for H&R Block and has written and is using data processing and payroll programs in three H&R Block offices. He is currently planning to write a program to check tax returns (a natural). If you use a TRS-80 for business and desire to meet fellow users, you can call John at (805) 489-1414.

Education Special Interest Group

George Christoph is forming a special interest group for the exchange of information on computers in education. George teaches computer programming in a Cincinnati Junior High School (using seven TRS-80's) and BASIC programming in the local community education program. The first Information Processing Tournament, held in Ohio in 1974, was sponsored by George. To contact George Christoph write to him at Finneytown Junior High School, 8916 Fontainebleau Terrace, Cincinnati, OH 45231.

And don't forget about the High School Science Special Interest Group (Richard A. Marble, c/o Casady School, Box 20390, Oklahoma City, OK 73156).

Amateur Radio Operators' Group

If you are a ham, interested in the TRS-80 this new group may be just for you. For information contact Sam Martinez N3SM, 625 Kingston Road, Middle River, MD 21220.

Getting Behind?

Someone recently estimated that there was a backlog of $200 billion (that's right, billion) in software projects. Are you among all the others waiting for the "right" program to be developed? If you do not have the expertise to develop the software yourself and do not want to pay the full price for a custom program, there is still hope. Offer a free-lance programmer the marketing rights to the programs he writes for you. I often do this for clients and it benefits everyone. The programmer gets a little something right away and the possibility of a later profit, if he does a good job. You, the customer, get a program to your specifications. The public also gets another program to choose from.

Programming Hint

To disable the BREAK key in NEWDOS use the following BASIC statement in your program:

```
POKE 23461,0
```

To reactivate the BREAK, you should PEEK the contents of 23461 into a temporary variable before POKEing 0, and then use another POKE to replace the original value when you want the BREAK enabled.

I am always happy to hear from you. Please send your comments to me at 15906 E. 96 St. N., Owasso, OK 74055. Please include a self-addressed stamped envelope for personal replies. ■

UNLIMITED 80's
by Sherry Smythe

Recently, I was given the red carpet treatment by Radio Shack while visiting the Tandy Towers in beautiful downtown Fort Worth, Texas, where the West begins.

It's hard not to be impressed by one of the world's nicest private subway systems, a Tandy Center free service given to the residents of Fort Worth. The end of the line takes you to a mall whose center attraction is a large ice skating rink with all the trimmings—beautifully costumed skaters and their pupils.

Upstairs, about seventeen floors higher, are Tandy's corporate offices paneled with oak, offering breathtaking panoramic views of the city.

Tight Security

About ten minutes away, amid tight security, in what used to be a J. C. Penney's store and later a Motorola factory, is now a Tandy manufacturing plant, assembling TRS-80 Model I's and II's. Inside, in the austere waiting room, visitors sign in, receive passes and wait for a tour escort. Mr. Nishikawa conducted our tour.

Everywhere you look Model II's are in all stages of completion. Much of the sub assembly work is done in the orient, and many of the raw materials for this assembly come from other Tandy enterprises. The assembly line in Fort Worth is a narrow track that winds its way through the room. Each computer rests on a flat car that rolls along until the Model II is fully assembled and packed. Quality is controlled by a machine that can pinpoint any short on a board and reject it, if it is not perfect. Every Model II has two burn-in periods. One is under normal conditions for 24 hours and the other under extremes of heat and projected user abuse.

In a smaller area of the same building, Model I's are constructed. Only the keyboard-CPU unit is assembled in Fort Worth. But quality is controlled in every step of the production.

Mr. Nishikawa keeps his employees competitive within the organization by recording the progress of various construction stages on a series of five or six TRS-80's mounted in the wall. Each displays the performance records of the departments and the daily percentage completed of their assigned goals.

The number of rejected units is shown and teams of employees endeavor to keep their reject scores low and their daily output high.

Upgrading

One part of the Model I assembly area is dedicated to upgrading the machines. Everything from new chips to new keyboards are installed.

Repairs are performed in another area with special diagnostic equipment that tells the operator just what's wrong and in most cases how to fix it. Spooky! Computers fixing computers.

John Roach assured me that Radio Shack is planning to maintain support on all existing computers, even though new and more exotic equipment is now being developed to hit the marketplace in late summer or early fall. And witnessing the thousands of computers being cranked along the assembly line, I believe it. ■


TRS-80™ USERS STOP!!!

WE'VE DONE IT AGAIN! MORE QUALITY ACCESSORIES STARTING WITH *TSHORT+* ! LVII & DOS SUPER SHORTHAND.

NEW!

NOW! WEB'S FAMOUS TSHORT™ EXPANDS!

SAVE MORE TIME THAN EVER... TYPING PROGRAMS WITH TSHORT+™!

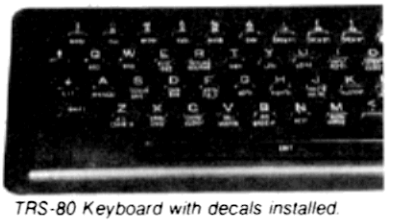

TRS-80 Keyboard with decals installed.


Look at these new Features:

- NOW! 41 preprogrammed LV II and DOS statement keys.
- NOW! 11 "SAVEABLE" KUSTOM keys: Ten 10-character and one 64-character.
- NOW! Includes automatic keyboard DEBOUNCE and AUTO REPEAT.
- NOW! RELOCATABLE. Less than 1 K bytes of machine language in low or high memory.
- NOW! Available on formatted DISKETTES for 2 or more drives. Comes on cassette for LV II and single disk drives.
- Hold "SHIFT" or "CLEAR" and press desired key — entire statement is typed on screen. Installed "CRTL" key can substitute for "SHIFT"
- Complete decal set (see picture) included for both LV II and DOS systems.
- Features self-entering commands, i.e. CONT; GOTO10; KUSTOM.
- Automatic Close Paren. ")" may be programmed in KUSTOM.

TSHORT + cassette w/ instruction manual ..... **$ 19.95**

TSHORT + formatted DISK version + manual ..... **$ 24.95**

NEW!



TMEM™


Now, the best of both worlds! A battery supported memory giving you READ/WRITE capability with ROM security!

- Use for retaining important totals/variables, utility/system software (i.e. TSHORT, TLEC), development programs, monitors, etc.
- User programmable. Write enable switch + OUT statement ensures memory security.
- External plug-in module. Available in either 1K or 2K. ADDR: 3000 to 37 Hex.
- Retains memory contents on power down or failure for 2 weeks or more. Built-in Batteries recharge automatically.
- Instant access to memory contents upon power up.
- Uses unassigned area of memory. No conflicts with other operating software.
- Compatible with either LV II or Disk Operating System. (Special cable required for LV II)

TMEM w/1K **$124.95**

or

TMEM w/2K **$174.95**




Controller

TSEL™

We'll convert YOUR IBM Selectric I or II to a high quality letter printer, totally compatible with your TRS-80.

- μp control — 512 character buffer.
- Special TRS-80 cable with custom "Pause", "Reset" switches. Our optional "Y" cable allows it to be plugged in with other printers.
- A superior word processing system.
- Compatible with Electric Pencil™or Radio Shack's Scripsit™. Patches or modifications not required.
- Completely tested and ready to LPRINT. TSEL (cleaning and minor service included) **$795.00**

(Options and shipping extra — call or write for special shipping instructions).



TBEEP 1™

For Level II and Disk Users — A self-contained audio alert beeper with a pager-like tone. Plugs in-line with "AUX" cable from your TRS-80. (Requires 9V Battery) ..... **$ 19.95**

- Puts your IBM MOD 50, 60, 75 a step ahead.
- New concept
- New features, benefits
- Simply plug into printer port
- No printer software required
- Low cost

SPACE RESERVED FOR THE NEWLY DESIGNED TLEC™

STAND ALONE INTELLIGENT PRINTER CONTROLLER

STANDARD FEATURES:
- μp CONTROLLED (Z80)
- 256 CMTR BUFFER
- DOWNLINE COMMANDS

COMMANDS:
- JUSTIFY
- PROPORTIONAL SPACING

SEND YOUR NAME & ADDRESS FOR MORE INFORMATION AS AVAILABLE

NEW!




TBEEP 2™

A TBEEP kit you install inside your TRS-80 keyboard.

- Completely assembled and tested.
- Attach to keyboard's PC board with double-sided foam tape (included) and solder three wires to easily located points on keyboard unit. Installs in minutes.
- Uses power from your TRS-80. No battery required.
- **DEALERS!** Install when modifying your customer's TRS-80, and include TBEEP's simple four word BASIC command in your off the shelf Software.

TBEEP 2 Kit (with complete instructions) ..... **$ 12.95**



TPAK™

The best cassette tapes money can buy — AGFA 611. We use them for our production software, such as TSHORT™. Pack of 10 C-10 blank tape cassettes, boxes, and blank labels ..... **$ 12.95**

TBASE™/TCHAIN™

2 powerful winners coming up. Watch our ads for release.



TBUFF™— OLD FAITHFULL

Stop your cassette when it should with our TBUFF cassette interface buffer.

(Specify recorder make & model) ... **$ 9.98**

Telephone Orders: (714) 559-6249

PLEASE NOTE: All WEB Associates' products are designed to work with Level II **and** Disk Operating Systems unless specified otherwise.

Send Check or Money Order to:

WEB ASSOCIATES ↙27

P.O. Box 60 QF, Monrovia, CA 91016

(California Residents add 6% tax)

DEALER INQUIRIES INVITED

UPS/C.O.D. — ADD $3.00

FOREIGN ORDERS: Add 20% ($10 maximum)

80 NEWS
by Nancy Robertson

Radio Shack Support Of Computer Products

According to statements made by company President Lewis Kornfeld in a recent press release, Radio Shack is offering wider support of their computer products. Computer leasing has been available since January. Computer centers have been opened in the 50 major markets and on-site service is an option to carry-in service.

Kornfeld states that the computer centers each incorporate "a full servicing facility, as well as a classroom, stockroom, sales room and display area."

Charlie Philips, company vice president, explains that, theoretically, each computer center has an instructor and a technician on the payroll. Courses are offered in the basics of computing. Customers are offered advice on devising a system of hardware and peripherals that is best for their specific needs.

The on-site service contract will bring a repairman to your door. To maintain and repair the equipment after the warranty lapses, contracts may be purchased for limited or unlimited on-site service for the Model II. This option is generally available for Model II service only. If you own a bevy of TRS-80 Model I's, it may also be possible to contract for the service.

Contracts and costs for on-site repairs vary from system to system. According to Philips, the most common form of the limited service agreement provides an installation visit, one preventative maintenance call and two remedial calls for $500 within a 50 mile zone of the service center.



TRS-80 Model II

Further information on leasing and on-site service contracts is available from computer centers and from company owned RS stores. Check with dealers as well. Computers centers may be located through the yellow pages or directory assistance in large urban areas. Local Radio Shack owned stores can direct rural residents to the center nearest them.■

Three Software Utilities

There is another editing tool on the market. This one, Packer, is sold by Cottage Software, 614 N. Harding, Wichita, KS 67208. Using five options, Packer helps save memory and time. It is one of three new releases from Cottage Software.

Packer is written in machine language, and is supplied on two tape cassettes in three versions, one each for 16K, 32K and 48K for Level II or Disk BASIC. Packer is sold with an instruction manual for $29.95. It works with the following commands:

UNPACK unpacks multiple statement BASIC lines into single statement lines while maintaining program logic. It also inserts spaces for easy reading and editing. You select the starting and ending line numbers, or unpack the entire program.

SHORT removes unnecesary words (eg. LET, GOTO after THEN or ELSE), spaces, and remark statements to shorten program length. Again, you can specify starting and ending line numbers.

PACK performs UNPACK then SHORT. Next it packs lines into multiple statements up to the maximum length you specify. It maintains complete program logic, including IF/THEN/ELSE statements, branches, etc. You can PACK the entire program or just sections of it.

RENUM renumbers your BASIC program lines including all branch references, such as GOTO, GOSUB, etc. You may input the first line number to be changed, the new line number and the increment for all subsequent lines to the end of the program.

MOVE moves any number of program lines to any new location in your program, and changes all branch references to the new line number.

Cottage Software's Disassembler disassembles Z-80 object code into Zilog mnemonics and shows ASCII Strings during disassembly.

With the MEMORY DISPLAY/MODIFY routine you can see the contents of 256 bytes of memory at one time in either hex or ASCII. You can modify the contents of RAM from the keyboard. STRING SEARCH searches through memory for a string of object codes to find subroutine calls, compares, register loads, etc. With READ/WRITE OBJECT TAPE you can read an object tape into memory for disassembly or modification, and then make a copy on tape of any part of ROM or RAM.

A program written in BASIC that edits Disassembler for use on a line printer and a program that allows loading and inspection of any TRS-80 500 baud tape are included in the package which costs $19.95.

System Tape Duplicator, another Cottage Software product, duplicates machine language tapes. Programs recorded on your own equipment normally load more easily, as the folks at Cottage Software point out. This item sells for $12.95.

Reader Service ↙ 170.

Machine Code Disassembler

Datagraphics, P.O. Box 566 Union Station, Endicott, NY 13760, is selling Disassembler-80. This software disassembles ROM or RAM, and has selectable output to either video display or a printer. It prints standard Z-80 mnemonics, with decoded data and addresses, in an easily readable format. Disassembler-80 handles all legal code combinations and traps illegal codes.

It provides an aid to assembly language programmers and is an educational tool for anyone interested in learning the workings of the Z-80 microprocessor. The package is supplied on tape for 16K Level II with optional line printer and is disk compatible. It costs $9.95 for the Model I. It has just become available for Model II, as well.

Reader Service ↙ 169.

Products Stretch Memory of Models I & II

For the Model I TRS-80, Vista Computer Co., 1401 Borchard St., Santa Ana, CA 92705, offers the V-80 Disk Drive System. Available in one-, two-, and four-drive configurations, the V-80 is a 40-track system which provides 102K bytes per drive. Track-to-track access time for the V-80 is 12ms compared to 40ms for the TRS-80.

A program patch, supplied at no charge by Vista, will adapt your TRSDOS disk operating

system to accommodate the 40-track drives and faster access times. Patches are available for all existing versions of TRSDOS. Cables are available for two and four drives.

Another Vista product, the VXM-80 Expansion Module, operates with the TRS-80 expansion interface to provide double density storage. In other words, total storage on a 40-track diskette can be increased from 102K to 204K bytes. VXM is priced at $239, including all hardware and software.

Beware: The VXM-80 is designed for use with Vista's V-80 Disk Drives, and Vista does not guarantee its operation in double-density format with TRS-80 drives.

Vista also offers Model II Disk Expansion System, which is available with up to three eight-inch, 77-track disk drives. A three-drive system can add 1.5 Mbytes of storage to your Model II TRS-80, giving the system a total of up to 2 Mbytes of on-line disk storage. Vista's Model II is fully compatible with the TRS-80 Model II, and plugs directly into one of the expansion connectors on the TRS-80.

The single-drive expansion system lists for $1000, the two-drive for $1550, the three-drive for $2100 and additional drives for $525. Vista products carry a 120-day warranty which covers both parts and labor.

Reader Service ↙ 180.

Level II Data Management

A data management utility for the TRS-80 Level II 32K, TRSDOS or NEWDOS, is available from Standard Systems Corp., Marketing Department, 2421 Tanglewood Road, Decatur, GA 30033.

The program, which is written in Disk BASIC, is called Customized Record Inquiry/Edit System (CRIES). It is menu managed for key-indexed records.

Naturally, the program will EDIT, ADD and DELETE records. It will allow listing of record keys, searching by examples and merging of disk selected portions.

The disk package contains CRIES, DOS command file, documentation and sample data files for $45.

Reader Service ↙ 164.

Create and Compile Graphics and Animation

Electra Sketch is an animation and graphics compiler which is available from Macrotronics, 1125 N. Golden State Blvd., Suite G, Turlock, CA 95380.


Macrotronics explains Electra Sketch will let you create your own movie sequence or combine graphics and plain text to create animation.


Electra Sketch works with one-key commands to control cursor direction, erase, draw vectors, fill in backgrounds, or create titles. Frames are saved on disk, can be recalled, edited and printed on a line printer.

Saved frames are animated by displaying them in either forward or reverse sequence. The speed of the animation can be changed in 10 increments from slow motion to rapid play.

Macrotronics is charging $14.95 for Electra Sketch. A catalog of 30 Macrotronics products is available without charge.

Reader Service ↙ 163.

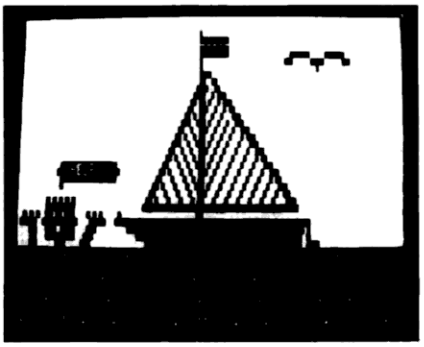

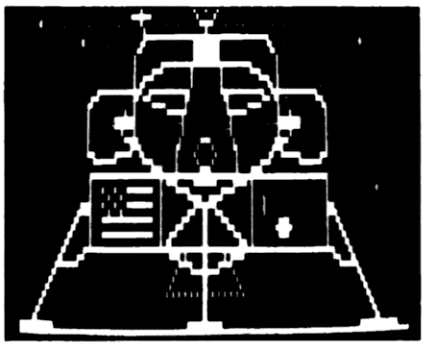

Examples of Electra Sketch graphics

Series 8000 Medical & Dental Management Systems

The Series 8000 Medical and Dental Management Systems for the TRS-80 Model II (and most other 32K CP/M disk based microcomputers) upgrades Univair, Inc.'s early version of the package.

Among other things, the new features include automatic display and computation of normal office charges, improved patient scheduling routines, alphanumeric patient sorting and archiving, provisions to link special user-developed programs into the main menu, and detailed operators manuals.

Series 8000 Medical/Dental Systems are on sale from Univair, Inc., 10327 Lambert Int. Airport, St. Louis, MO 63145 for $495 each. The price includes telephone consultations on initial set-up. Series 2000 owners may upgrade their systems at a cost of $100 and will receive a new six-month warranty. Operators manuals may be bought separately for $15.

Reader Service ↙ 177.

Accounts Receivable/ Invoicing for Model II

Accounts Receivable/Invoicing System for the TRS-80 Model II is available from Taranto & Ass., Inc. The package design is the result of users' experience with Taranto's Model I conversion of the Osborne/McGraw-Hill Accounts Receivable book, and has also been expanded to include an invoice program.

Customer and invoice files are key controlled for quick access. Up to 51 items may be billed on a single invoice. Both invoices and statements are printed. Package users define sales tax rates as they apply to each customer. Customer service charge rates are also defined by users. These functions are then computed as they apply.

The package generates reports which list invoices that have not been billed, open items, closed items, and an analysis of age and open items.

Osborne/McGraw-Hill's *Accounts Payable/ Accounts Receivable Wang Book* documents much of the package and must be used in conjunction with it. Both the book and the package are available from Taranto & Ass., Inc., Box 6073, 4136 Redwood Hwy., San Rafael, CA 94903. The book costs $20. Accounts Receivable/Invoicing System costs $249.95.

Reader Service ↙ 162.

Data Base Management

IDM-M2, an interactive data manager for the TRS-80 Model II, provides a general purpose approach to data base management. Micro Architect, who produces IDM-M2, suggests that it allows many applications for users without the technical knowledge required by most data base programs.

The package is a conversion of IDM-IV for the Model I with additions. It includes two levels of security, up to 40 fields, search command, statistics and error trapping. The report generator has optional column justification, dating and automatic paging and a record selection range. The report writer includes field addition and subtraction, and operators for filter criteria, field updates, record deletion and a display format for records.

IDM-M2 is written in BASIC. It requires 64K memory. The package is priced at $199 and is sold by Micro Architect, 96 Dothan St., Arlington, MA 02174. Demonstrations can be arranged.

Reader Service ↙ 176.

32K Expansion Interface

An expansion interface for the TRS-80 called Model LX80 is available from Lobo Drives Int. It expands memory capacity up to 40 million bytes, or 32K of RAM.

A switch permits overriding the keyboard ROM for booting in diagnostics and custom-


↙ Reader Service — see page 162

ized operating systems. Connectors for the 5.25 and eight-inch floppy disk drives and other peripheral devices are located on the side and rear panels.

Other features include a parallel Centronics printer port; a port for the Lobo Drives Model 7710T Winchester hard disk drives, a screen printer port, two microprocessor-controlled bidirectional serial ports and a crystal controlled real time clock.

The interface is sold by Lobo Drives Int., 5082 Shirley Drive, LaPalma, CA 90623 for $525. Dealer discounts are available.

Reader Service ↙ 178.



Lobo Drives' Expansion Interface.

Nevada COBOL for TRS-80s

Business Microproducts, Livermore Financial Center, 1838 Catalina Ct., Livermore, CA 94550, has the Nevada COBOL compiler available for the TRS-80 Model I and II. The compiler has been running for one year under PTDOS and was converted to CP/M in 1979. It has been relocated to 4200H for the Model I, while the Model II works with the standard CP/M.

Nevada COBOL by Ellis Computing was designed specifically for small businesses using microprocessors. It quickly translates source language programs into machine language programs and is simple to use.

The compiler is a subset of ANSI-74 and includes random access file support, both fixed and variable length sequential files, debugging capability, copy statement, character string, 16-bit binary and packed decimal (COMP-3) data types, 18-digit accuracy, hexadecimal nonnumeric literals, English language error messages and interactive ACCEPT/DISPLAY.

Nevada COBOL requires 16K RAM, two five-inch single density drives, or one eight-inch single density drive.

Including a run time package, sample COBOL program and terminal configuration program, the compiler is supplied on a CP/M data diskette. The cost, including a manual, is $99. Documentation is available separately for $25.

Reader Service ↙ 166.

Software for Dentists

Dentalware, a package combining patient treatment plans with patient billing, is being sold by Caldata Systems, P.O. Box 178446, San Diego, CA 92117. Caldata explains that "complete word processing capability" is thrown into the bargain.

Besides keeping track of past and planned treatment for each patient, the package can take care of all patient accounts. Fees are set by the package user, then the package will issue itemized statements and tally balances. Dentalware can also be used to fill and file insurance forms.

Designed for the Model II, the complete package costs $2600. (From what Caldata says, you get the impression that pulling teeth will be just about the only thing left for the dental staff to do.) The instruction manual may be purchased separately for $35. The word processor, Word Magic II, costs $100 when purchased separately.

Reader Service ↙ 181.

Electric Pencil Products

Several new Electric Pencil products are available from Michael Shrayer Software, Inc., 1198 Los Robles Drive, Palm Springs, CA 92262.

The Electric Pencil II is being shipped for TRS-80 Model II users who have CP/M. It is available with three print packages:
Standard Print Package runs with serial or parallel interfaced printers. It costs $275.
Diablo/Qume Print Package works with serial versions of the Diablo and Qume Micro Sprint 5 printers. It is priced at $300.
NEC Print Package works with serial interface NECs only. The price is $300.

All these packages contain fractional character spacing (pseudo proportional), bidirectional printing, boldface and automatic negative linefeeds.

The TRS-80 Model II TRSDOS version of the Electric Pencil II for non CP/M users is also available. Additional features in this version are word left, word right, word delete and page numbering at the bottom.

Standard Printer Package retails for $325 and the Diablo/Qume/NEC Printer Packages retail for $350. The company makes no upgrades or exchanges between CP/M Model II and TRSDOS versions.

Convert is a conversion utility program which converts files created by the Electric Pencil II to CP/M. Files may be created in assembly language, BASIC, Fortran, etc., using the Electric Pencil and then converted into CP/M files for further processing. Convert is available for $35.

Reader Service ↙ 167.

Personal Finance Package


Investment Portfolio System, a data base management program with a broad range of applications, is available from Personal Finance Systems, 1446 Durham Rd., Madison CT 06443.


The program will store and report data on as many as 72 securities and review items in the portfolio by price, yield, percent gain or loss. It provides four special reports: complete summary data on the portfolio; current value and return; long and short term gain and a security analysis report. This latter report provides information about return on investment, annualized yield and earnings and yield gain compared to market index.

Personal Finance Systems is developing other data base management programs, which will record sales as well as purchases, issue tax reports and Security Exchange Commission reports and update the data base via a telephone modem.

Investment Portfolio System is available in a disk version for TRS-80 32K LII single drive computers, and in a tape version for 16K LII. Both programs are supplied on a single tape. The package, including documentation, costs $39.95. Documentation is available separately for $7.50.

Reader Service ↙ 165.

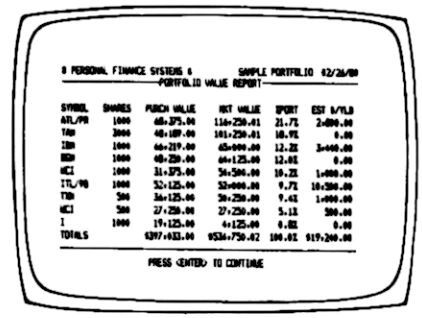

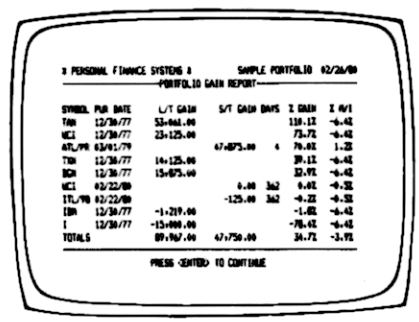

Sample gain on value reports

Mediamix Typesetter

Mediamix, PO Box 8775, Universal City, CA 91608, is selling PSRJ + 2.0 for use with their IBM Model 50 Typewriter/TRS-80 Interface. This machine language program prints out an Electric Pencil text file (or any ASCII file) using the IBM 50's proportional spacing type elements, with full right justification.

The user can imbed codes in the text for centering of titles, indenting paragraphs, underlining, typing special characters and pauses during printing to allow changing type fonts for titles, italics, etc.

Reader Service ↙ 174.

TBS-80 DATA PROCESSING SYSTEMS. ONE STEP BEYOND.

If you thought the TRS-80™ microcomputer was just a toy, think again. These **TBS-80** software systems will turn that computer into a **powerful data processor.**

INFORMATION SYSTEM by Dale Kubler is simply the best in-memory, data base manager on the market. It allows you to create files with up to ten fields per record, up to 40 characters per field and 200 characters total per record. Data from the keyboard is entered directly onto a screen display of one entire file. Once entered, you can sort or search your entire data base by any category and have the information desired displayed on the screen. **INFORMATION SYSTEM** provides a thorough editing mode allowing changes by line without rewriting an entire file. This program allows you to program your own printouts to almost any form you desire for line or serial printers. Screen prints from anywhere in the program are also available **INFORMATION SYSTEM** creates either disk or cassette files depending upon the version you use. From mail lists to recipes, this program is the ideal small system information manager. The price for this program, 32K up disk is $34.50. For systems 16K up tape it's $24.50.

DATA MANAGER by Dale Kubler starts out where INFORMATION SYSTEM leaves off. Requiring 32K and one disk, it accepts up to ten user-defined fields with up to forty characters per field and 255 characters per record. As with all TBS software, data entry and editing is professional and simple to use. What makes this program stand apart from "in-mem" data managers is that it uses up to four disks on line as memory, or as much as 320K of memory storage. Because disk sorts take more time than in-mem sorts, **DATA MANAGER** enables the user to create and maintain up to 5 "key" sort files for quick access of data. A utility program is provided to calculate the number of records possible since the amount of records you can maintain is dependent on a number of variables. This program also supports the upper/lower case modification, and printouts can be programmed to almost any format and sent to line or serial printer. Background printing is provided enabling the computer to search and print at the same time. If you already have INFORMATION SYSTEM, **DATA MANAGER** will accept those files.

A necessity for organized people, this program sells for $49.50.

BUSINESS MAIL SYSTEM by Dale Kubler is designed for large-scale business users. Requiring 32K, two disks and printer, this program will store up to 150,000 names in a single file spread out over multiple disks. Each data disk holds 500 names. After data entry, BMS automatically sorts the data by zip code and alphabetical order within the zip code. The program tells you when and which data disk to insert, expanding your files automatically until you've reached 300 disks. Data is input directly onto formatted screen display with the option to use Company Name/Attention instead of Last Name/First Name. Three numeric and one alpha code fields are provided to help you use the search and printout mode. **BUSINESS MAIL SYSTEM** allows you to program the number and spacing of your labels.



With more features than can be described here, this high-powered program sells for $125.00.

TEXT MERGE is the program that puts it all together. If you have the ELECTRIC PENCIL from Michael Shrayer, 32K and one disk drive, then this program is a must. It will merge your data base from any of the above programs with an Electric Pencil file. For example, when you write a letter that is going to several hundred people, you can "code" it by entering a field name from the above programs in place of the actual information. Then, when **TEXT MERGE** is run, it will print out your Pencil file and substitute the "code" with the actual data. In other words, you can print out 1,000 personalized letters without stopping the computer. This program will also enable you to selectively search out only the records from your data base that you wish to use. Also included is the ability to set left, right, top and bottom margins, set page numbers anywhere on the page, and print out right justified if you so choose. **TEXT MERGE** will turn your computer into a powerful data processor and it sells on disk for $49.50.

TBS has other incredible software for Tandy's microcomputer. Intent on making it a powerful tool, we have **large scale business accounting systems, general accounting systems, system utilities** and the **Library 100.** We have the only **DISK HEAD CLEANER** (for APPLE too!) and **GRAN MASTER DISKETTES,** the best on the market.

TBS is **YOUR COMPANY,** and we build systems, not just software. The above products are available now, nationwide. Visit your local Computer Dealer or Associate Radio Shack Store and demand the best, demand TBS. For more information, contact us through the numbers below.

™TRS-80 is a trademark of the Tandy Corporation.


TBS™ ✓6

THE BOTTOM SHELF, INC.

(404)939-6031 • P.O. Box 49014 • Atlanta, GA 30359

✓Reader Service—see page 162

The Game Of Life

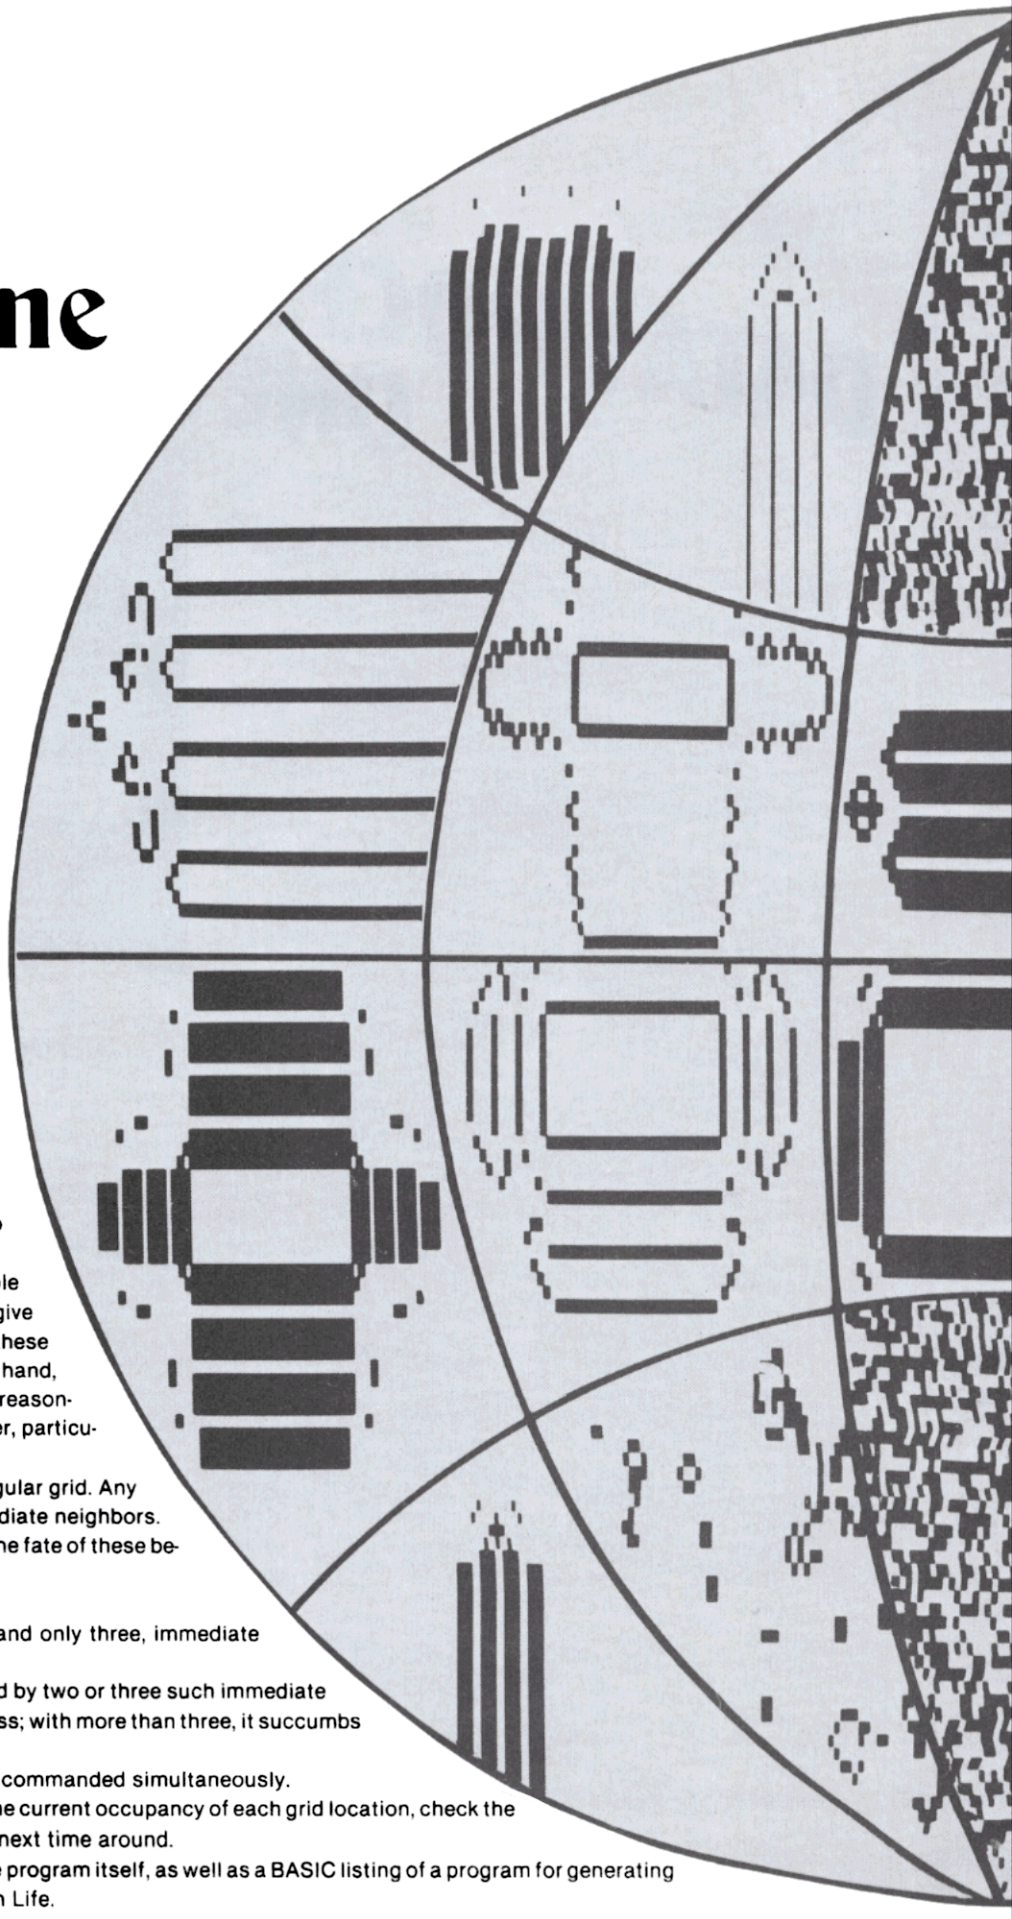

Dennis Bathory Kitsz
Roxbury, VT

Classic among challenges in computer programming is the Game of Life, conceived and developed in the early 1970's by British mathematician John Conway. Life is not exactly a game, it is more than a pastime, and most of all, it is a stunning display of video graphics for the TRS-80.


The Game of Life is based on a few very simple rules. A universe of beings is created to live, give birth, and die. An infinite, random universe of these beings would be most interesting. On the other hand, a limited, regularly-ordered universe is the only reasonable way Life can be programmed on a computer, particularly on a computer of the TRS-80's size.

Conway's original universe consisted of a regular grid. Any being on this grid is surrounded by eight immediate neighbors. Conway provided only three rules to determine the fate of these beings.

1. A potential being, surrounded by three, and only three, immediate neighbors, is given birth.
2. A being, once born, stays alive if bordered by two or three such immediate neighbors. With less than two, it dies of loneliness; with more than three, it succumbs to overpopulation.
3. Every generation of births and deaths is commanded simultaneously.

This is an ideal computer problem: Examine the current occupancy of each grid location, check the number of its neighbors, and readjust the grid next time around.

What follows is an assembly listing of the Life program itself, as well as a BASIC listing of a program for generating "seed" populations. I call it Playing "God" with Life.

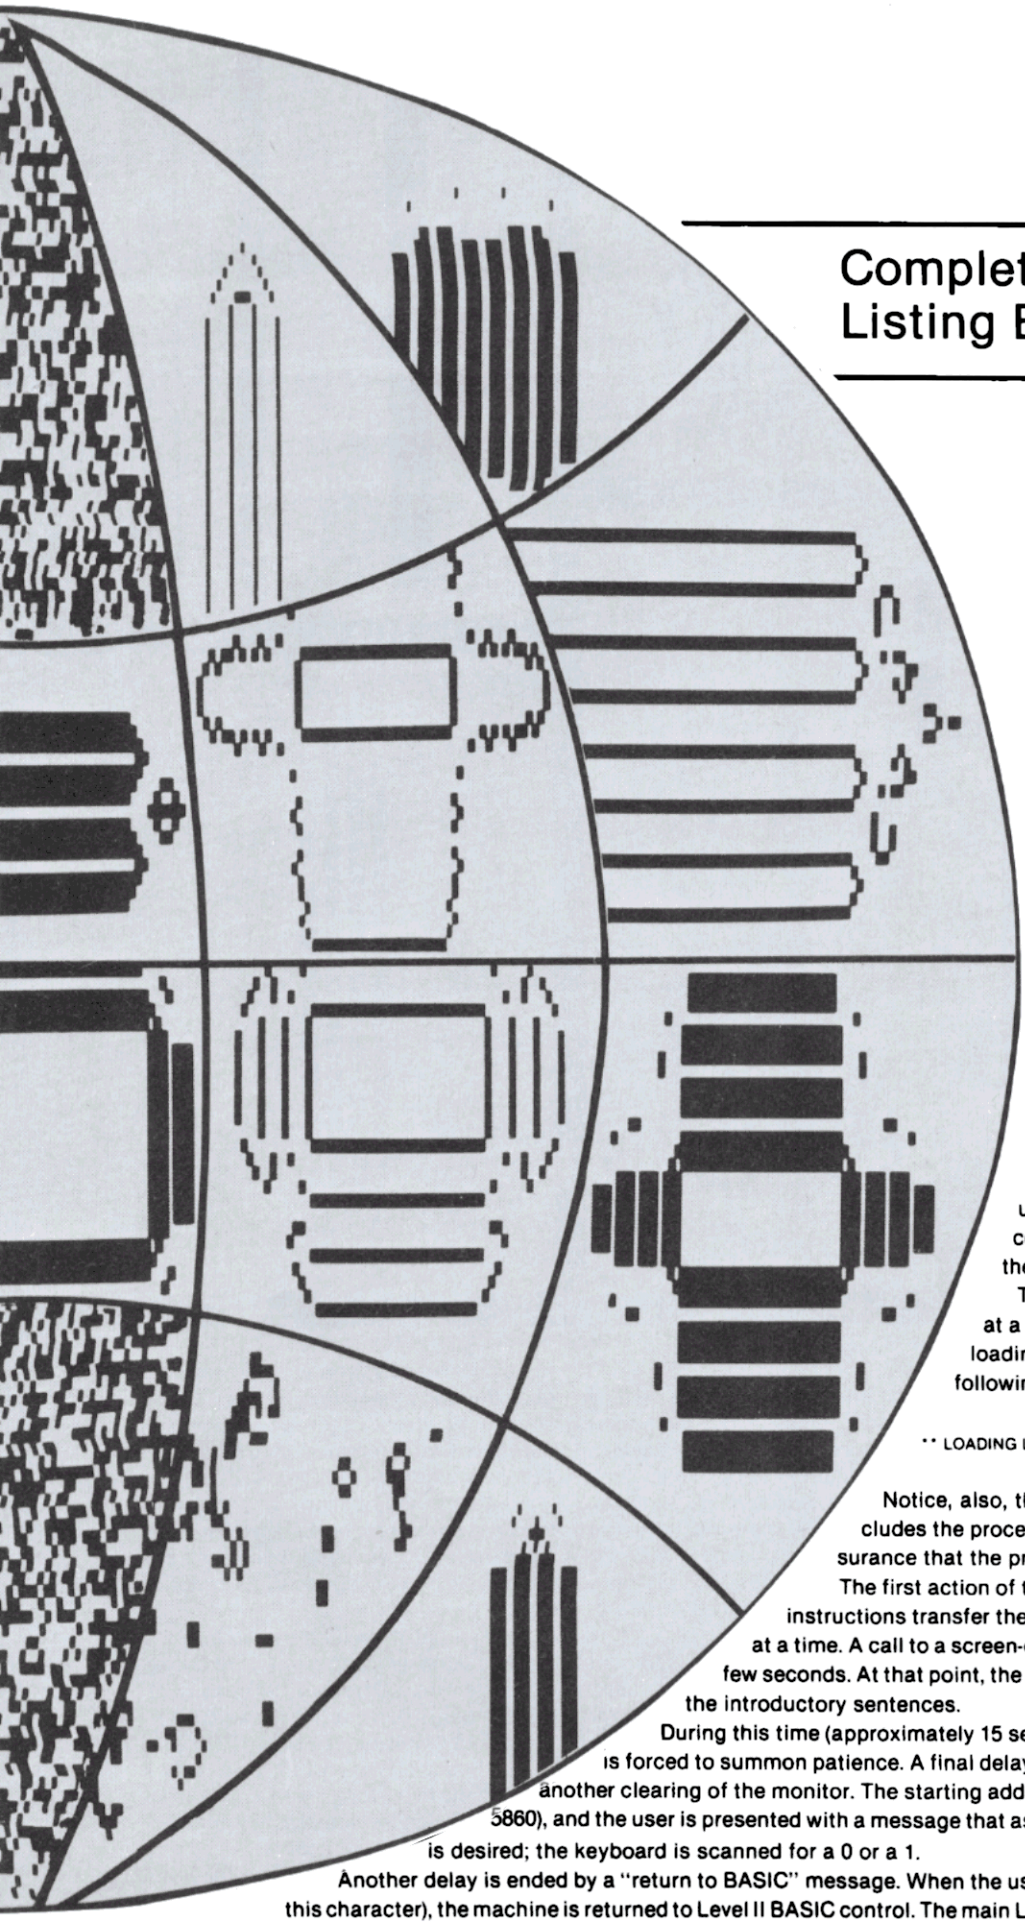

Complete Assembly Code Listing Begins on Page 54

About this Version

This version of Life was created with certain of the frustrating aspects of real life in mind. In the beginning, when the screen clears and the introductory text is presented, a long delay ensues. Each letter appears separately, and the text builds on the screen. The machine is taken from the hands of the user until the text is complete, and, even then, will accept only the requested input, with no help from the ENTER or BREAK keys.

Take a look at the actions of the program a step at a time. The assembly program, Listing 7, gives a loading message to the user starting at line 240. The following statement is displayed:

** LOADING LIFE9 *** WAIT FOR "GOOD LOAD" *** THEN ENTER "/" **


Notice, also, that a ***** GOOD LOAD ***** message concludes the process (line 6740), in order to offer a measure of assurance that the program made it.

The first action of the Life machine program is at line 5190. These instructions transfer the opening monologue to the screen a character at a time. A call to a screen-clearing subroutine is made, which is held for a few seconds. At that point, the first two lines of text are displayed, followed by the introductory sentences.

During this time (approximately 15 seconds), the keyboard is disabled, and the user is forced to summon patience. A final delay holds the message on the screen, followed by another clearing of the monitor. The starting address of BASIC's "USR" call is put in place (line 5860), and the user is presented with a message that asks whether a count of the passing generations is desired; the keyboard is scanned for a 0 or a 1.

Another delay is ended by a "return to BASIC" message. When the user enters a zero (the program responds only to this character), the machine is returned to Level II BASIC control. The main Life pro-

continued to page 44

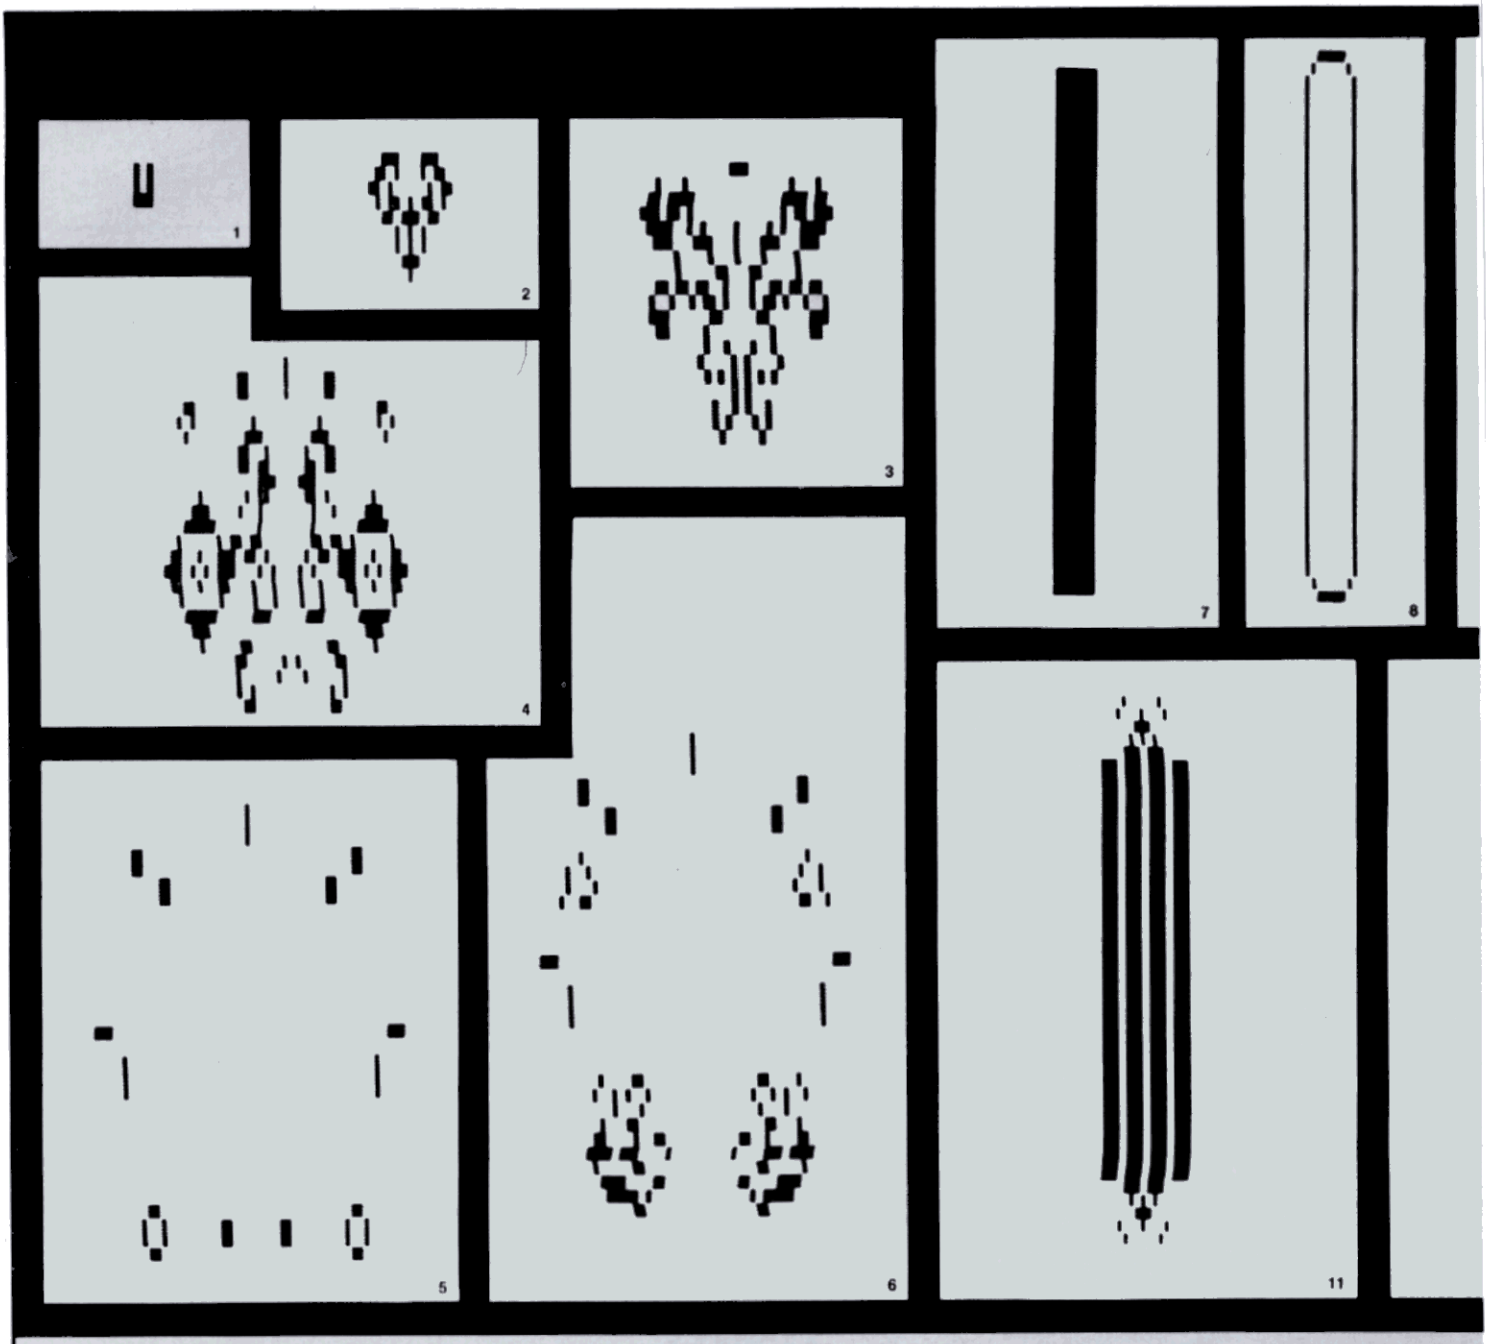

In the Game of Life, the pattern of growth should be fluid – although for theoretical purposes, this fluidity is not important – the beauty of the changes is often the most important reason for programming Life. But the larger the grid of beings, the slower these changes can be calculated by the computer.

A small (and certainly uninteresting) total universe of four cells by four cells demands 16 checks on each cell and its eight neighbors, or 144 examinations in all. A 20 by 20 grid is still small, hardly two square inches on the video monitor, but demands about 3,600 distinct cell checks.

The TRS-80 video graphics system offers an irresistible arrangement of 48 cells deep by 128 cells wide – 6,144 in all. For that large a grid, over 55,000 cell examinations have to be made to complete each generation.

After that introduction, the game may sound like a dry process, but the screen patterns produced are beautiful designs that are often referred to by names such as gliders, ponds, space ships, flashers, traffic lights, and by more poetic terms such as civilizations, gypsy troupes, marauding bands, hermits, and so forth. Take a look at the first series of photographs, 1-6.


A simple group of seven beings formed in the shape of an arch (sometimes called pi) develops over the course of 173 generations, producing fascinating symmetrical patterns. Through its life, this civilization grows larger.

One interesting pattern, dubbed a glider in Conway's original description, is among the group of pentominoes, or patterns built from five characters. The glider goes through a few permutations, eventually cloning itself after four generations, but moves in an angular path with each self-duplication. See photos A-D.

Another of the familiar Life patterns is the spaceship, photos E-H, which replicates itself in four generations as well, but appears in mirror image every two generations.

The tall bar presented in photos 7-13 reaches stability much earlier, but during that time offers dozens of designs reminiscent of art deco, or, at the very least, like an old Wurlitzer juke box!

The third series of photos, 14-6, shows three points in the long life of a random initial population, which reaches stability only after hundreds of generations. Some random patterns will continue for thou-

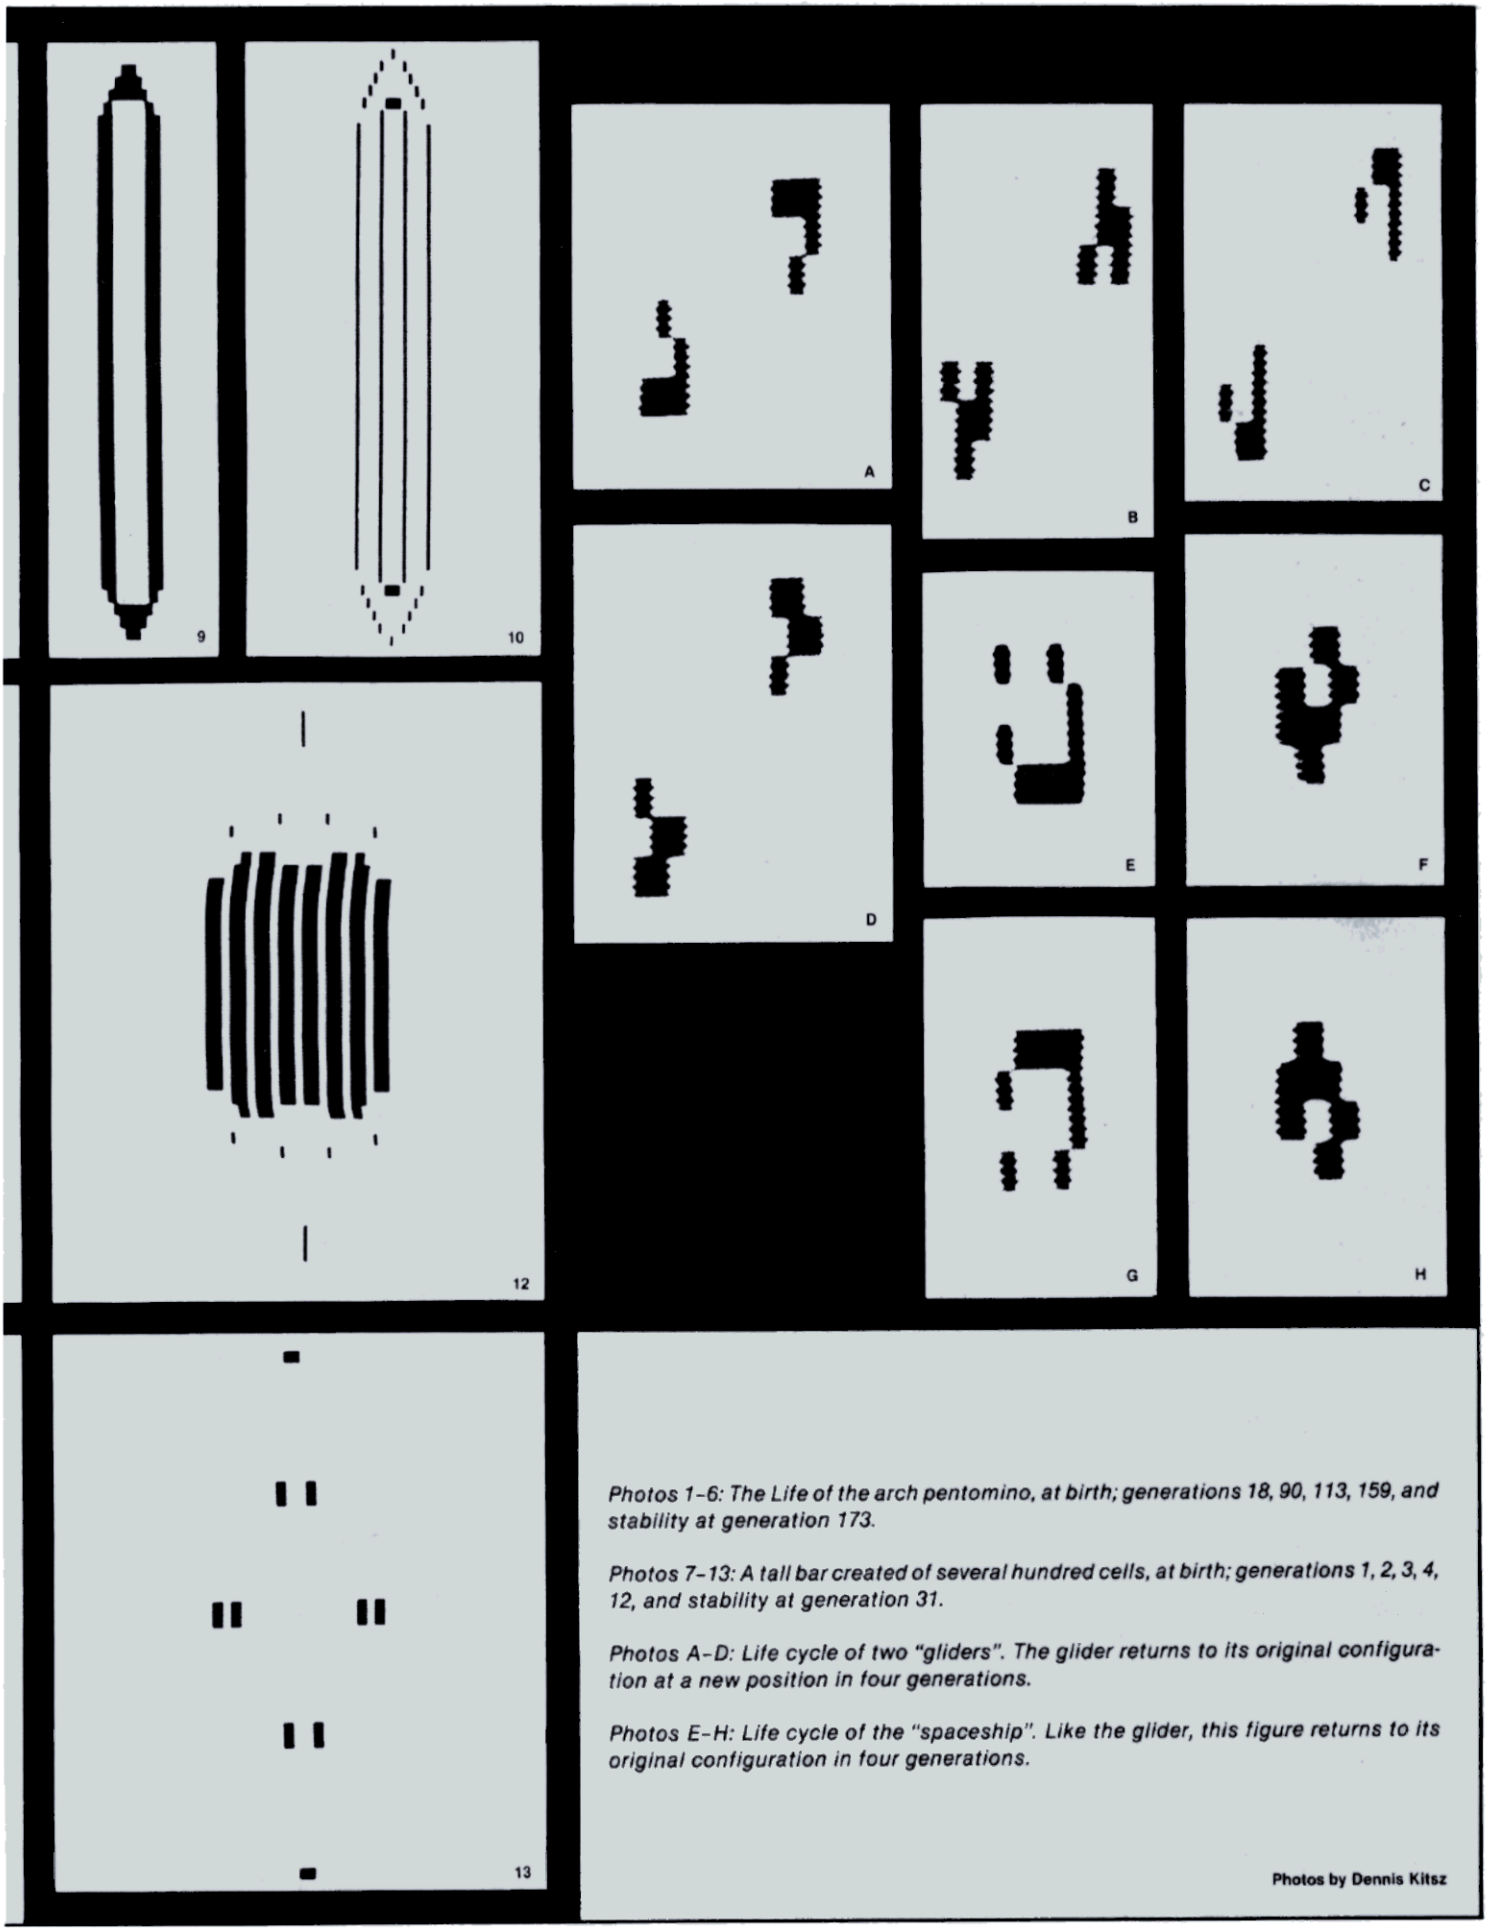

Photos 1-6: The Life of the arch pentomino, at birth; generations 18, 90, 113, 159, and stability at generation 173.

Photos 7-13: A tall bar created of several hundred cells, at birth; generations 1, 2, 3, 4, 12, and stability at generation 31.

Photos A-D: Life cycle of two "gliders". The glider returns to its original configuration at a new position in four generations.

Photos E-H: Life cycle of the "spaceship". Like the glider, this figure returns to its original configuration in four generations.

Photos by Dennis Kitsz

sands of generations, as a small group of beings might develop in one corner, eventually traveling and overtaking another portion of the screen in what could be called a battle or perhaps imperialistic exploration or merely the mixing of great cultures.

Life afficionados will talk about Garden of Eden patterns. These are groups which must be created to exist; that is, they cannot be given birth by any other known combination of cells. But the greater enjoyment for me is becoming an observer in an ageless master plan – a sort of limited deity with control over a Garden of Eden, possessing the power to commit the universe to oblivion or make it grow full.

You can create and destroy at will, but to change the master plan is beyond your power. We can only observe as the generations march by, suspending time to save a few friends.

It is a programming challenge to develop a Game of Life that makes metaphors like these possible. To understand this challenge, it is worthwhile to attempt to produce a single generation from a seed pattern by hand. Let's take a look at three ways of programming Life on the TRS-80.

The first method of programming is to use an entire memory location for each cell. This means, unfortunately, that a grid of only 64 characters across by 16 characters deep can be used. Nevertheless, this is the easiest choice, and can be programmed in BASIC (Listing 1). Each generation of blocks takes two minutes and 10 seconds to produce.

The second method of programming Life is to use all the graphics cells that make up the TRS-80 video system. Each character location has been broken up into six graphics points, which are accessible through the SET and RESET functions in Level II BASIC. However, the SET and RESET commands are very slow. In order to demonstrate quickly the speed at which the built-in graphics of the TRS-80 function, enter the three short BASIC programs presented in Listings 2, 3 and 4.

The first of these executes in 60 seconds; the second, in 10 seconds; and the third, fastest of the BASIC options, in two seconds. Now, enter the program in Listing 5, which POKEs into place a program to perform the identical function executed by the previous BASIC programs; it returns to BASIC after a short delay.

The speed of machine language changes is considerably faster, because once we have put a cycle of instructions to the machine's central processing unit, we can avoid making the dozens of comparisons and calculations necessary to use the Level II BASIC interpreter in ROM.

This Game of Life has been written in machine or assembly language. ■

by Dennis Kitsz

```
10  CLS
20  DEFINT X,N,Q,A,B,C,D,F,G,H,I,J,K,L,M
30  DIM L(1024) : Q = 191 : K = 15359
40  GOSUB 300
50  FOR M = 15360 TO 16320 STEP 64 : POKE M,32 : NEXT M
60  FOR X = 15360 TO 16383 : N = 0
70  A = PEEK (X-65) : B = PEEK (X-64) : C = PEEK (X-63) : D = PEEK (X-1)
80  F = PEEK (X + 1) : G = PEEK (X + 63) : H = PEEK (X + 64) : I = PEEK (X + 65)
90  IF A = Q THEN N = N + 1
100 IF B = Q THEN N = N + 1
110 IF C = Q THEN N = N + 1
120 IF D = Q THEN N = N + 1
130 IF F = Q THEN N = N + 1
140 IF G = Q THEN N = N + 1
150 IF H = Q THEN N = N + 1
160 IF I = Q THEN N = N + 1
170 L(X-K) = N
180 NEXT X
200 FOR X = 15360 TO 16383
210 IF L(X-K) = 2 THEN 240
220 IF L(X-K) = 3 THEN POKE X,191 : GOTO 240
230 POKE X,32
240 NEXT X
250 GOTO 50
300 FOR X = 15360 TO 16383
310 J = RND(2) : IF J = 1 THEN POKE X,191
320 NEXT X
330 RETURN
```

Program Listing 1. Simplified Life in BASIC.

```
10 CLS
20 FOR X = 0 TO 47
30 FOR Y = 0 TO 127
40 SET (Y,X)
50 NEXT Y,X
60 GOTO 60
```

Program Listing 2. Screen white-out using SET and RESET functions

```
10 CLS
20 FOR X = 15360 TO 16383
30 POKE X,191
40 NEXT X
50 GOTO 50
```

Program Listing 3. Screen white-out using POKE commands.


```
10 CLS
20 CLEAR 100
30 FOR X = 1 TO 15
40 PRINT STRING$(64,191)
50 NEXT X
60 GOTO 60
```

Program Listing 4. Screen white-out using PRINT STRING$ function


```
10  CLS
20  DIM A(30)
30  FOR X = 1 TO 27
40  READ A(X)
50  NEXT X
60  DATA 33,0,60,17,1,60,1,255,3,54,191,237,
    176,6,5
70  DATA 33,255,255,43,124,181,194,18,127,
    16,245,201
80  FOR X = 32512 TO 32538
90  POKE X,A(X-32511)
100 NEXT X
110 POKE 16526,0 : POKE 16527,127
120 M% = USR(0)
130 CLS
```

Program Listing 5. Screen white-out in machine language jumping from BASIC.


Photos 14-16: A large random universe, at birth; at generation 306; and finding stability at generation 696.

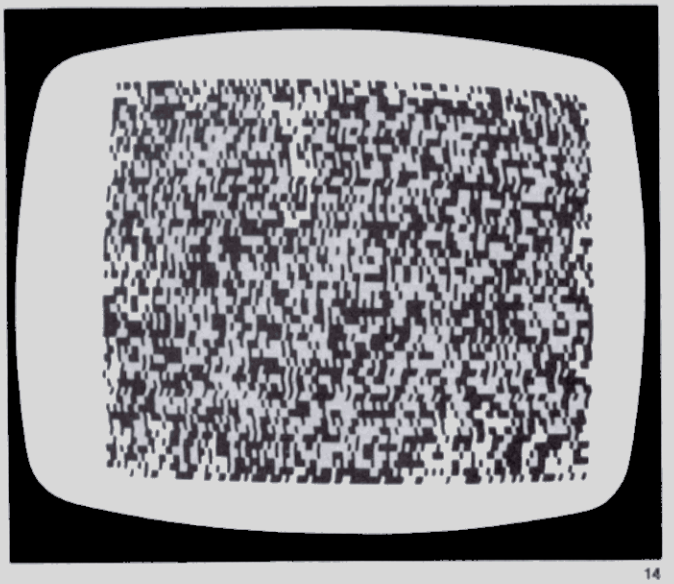

14

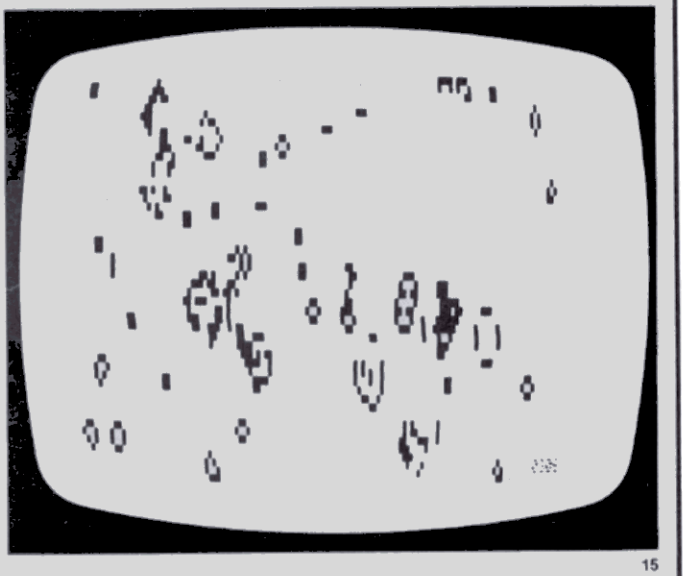

15

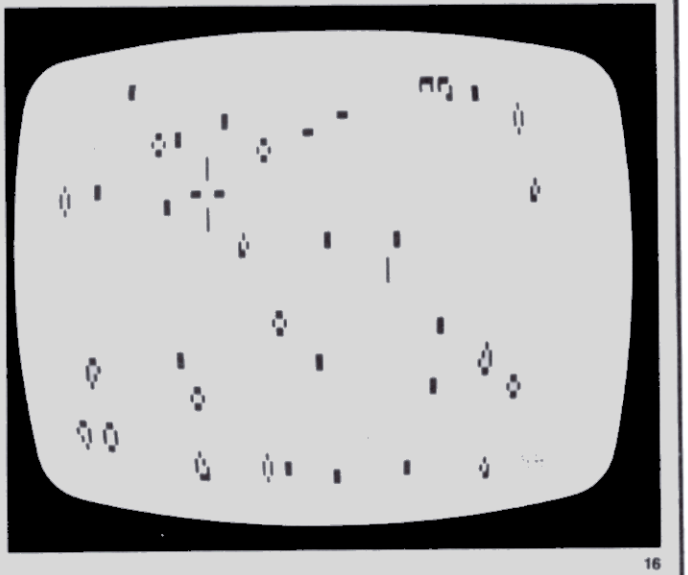

16

for the TRS-80 from Micro-Mega

CASSETTE CONTROL UNIT

● Speed up your cassette tape handling ● Pinpoint program locations on tape with an audible monitor ● Get protection from recording and playback glitches resulting from ground loops ● Eliminate the tedious plugging and unplugging of recorder cables.

The Micro-Mega Cassette Control Unit does all this and more. You get instant manual control of the recorder at the flick of a switch. Want to find the beginning or end of a program? Flick another switch and you'll hear it. All cables remain plugged in all the time.

The Micro-Mega Cassette Control Unit does a lot to improve the appearance of your TRS-80 system, too. As shown, it's in a 2½" x 5" box which snuggles between the keyboard and your recorder. There is no need to move the recorder, and all cables come neatly into the unit. The Cassette Control Unit is tailored to the CTR-41 recorder, but may be used with most other recorders as well.



CASSETTE CONTROL UNIT..... $37.95
Add $1.00 for postage and handling

CPU MONITOR

Ever find yourself with a blank screen wondering what your computer is up to? The Micro-Mega CPU Monitor can tell you, for example: ● If your CPU is in a loop with no exit, ● When a long sort is nearing completion, or ● If a key bounces during keyboard input. The CPU Monitor lets you listen to all CSAVEs and CLOADs and will help you quickly find the correct recorder volume setting. If you have an expansion interface, you will always know whether the real-time clock is on or off because you can hear it.

The Micro-Mega CPU Monitor gives a voice to the Z-80 microprocessor in your TRS-80 by using AM radio circuitry to pick up the computational rhythms of the CPU, which are amplified and played through a loudspeaker. The pickup unit of the CPU Monitor, shown at left in the photo, goes under your TRS-80 keyboard. It is connected by a 36" cable to the speaker and control unit, which includes an on/off volume control and an LED "power-on" indicator. The Monitor is powered by an AC adapter, shown at right in the photo. No batteries are needed and no electrical connections to your TRS-80 are required.



By listening to the CPU Monitor, you will soon become familiar with the "personalities" of the programs you run and whether they are executing in a normal way. A dramatic use of the CPU Monitor is in the great enhancement which it provides for computer games. (See "Gaming Environment" below.)

CPU MONITOR..... $47.95
Add $2.00 for postage and handling

THE GREEN-SCREEN

The eye-pleasing Green-Screen fits over the CRT of your TRS-80 Video Display and gives you improved contrast with reduced glare. You get bright, luminous green characters and graphics like those featured by very expensive CRT units.

The Green-Screen is closely matched to the color and texture of the TRS-80 Video Display and improves the overall appearance of your system. It is attached with adhesive strips, which do not mar your display unit in any way.

The Micro-Mega Green-Screen gives improved video display visibility for all applications and is especially effective in creating dramatic, high-impact displays for computer games. (See "Gaming Environment" below.)




THE GREEN-SCREEN..... $13.95
Add $1.00 for postage and handling

THE ULTIMATE STAR TREK PACKAGE

Tired of trivial computer games? This complete Star Trek package will provide you with endless fascination and challenge. In addition to the program cassette, it includes comprehensive instructions, a pad of "Voyage Log" record sheets, and a free-standing "Torpedo and Maneuvering Chart."

The package is built around the latest version of Lance Micklus' incomparable Star Trek III, a 13,000 byte program with a host of subtle and imaginative features, which include numerous dynamic and spectacular graphic displays. Star Trek III puts you in command of the Enterprise cruising in a galaxy of 192 quadrants filled with uncharted hazards, including hostile Klingons, pulsars, and black holes. You have at your disposal scanners, various weapons and defense systems, on-board computers, and a loyal crew. (You will need them all to survive the Klingons.)



Your mission is to rid the region of Klingons and to locate five inhabitable planets, all within 300 stardays, before returning to Star Fleet Headquarters where your overall effectiveness as a starship commander will be scored. High scores are possible only with careful planning and effective battle tactics. The "Voyage Log" sheets will guide your strategy, and the "Torpedo and Maneuvering Chart" will give you a vital edge in combat. (When you engage three Klingon ships you can't afford to miss.)

STAR TREK PACKAGE (for Level II, 16K only)..... $22.95
Add $1.00 for postage and handling

CREATE YOUR OWN SPECTACULAR GAMING ENVIRONMENT (and save $5.00)

The Enterprise is in battle trim with deflector shields at full power. As her captain, you are taking her into combat. The battle-stations siren rings in your ears and "CONDITION RED" flashes on your monitor screen. You call for warp drive and key in the coordinates of the quadrant where your scanners have detected Klingon ships. As you select the warp factor, you hear the reassuring clicking of your navigational gear as it activates the warp drive.

Suddenly, you break out of hyperspace and your monitor displays the chilling sight of three Klingon Battle Cruisers floating on your screen! Their evil shapes glow in luminous green against the black void of space. Moments later, you hear the characteristic rasping sound of Klingon laser weapons, and, as you watch, high-energy beams come knifing toward the Enterprise in succession from each of the Klingon ships.

You have been hit! You hear the dismal sound of the damage control alarm as "DAMAGE TO WARP DRIVE" and "DAMAGE TO PHASERS" flash on your screen. The Klingons have stopped firing! The Enterprise is crippled, but your best weapon is still intact, and it's your turn now! You key in the command for photon torpedoes. As your screen again displays the position of the Klingon ships, you select a firing vector from your torpedo chart and key it in. Now you hear the buzz of your photon torpedo as you see it speeding toward a Klingon ship. It strikes him dead-center! As you watch, the Klingon Battle Cruiser disintegrates, accompanied by a satisfying crackling sound.

Does the above scenario sound far-fetched? Not at all. It's a small sample of what you will experience with Micro-Mega's Gaming Environment, which consists of: ● The STAR TREK PACKAGE ● The GREEN-SCREEN and ● The CPU MONITOR. The fast-paced and dynamic action reflects the superb Star Trek III program together with the "Voyage Log" and "Torpedo Chart" of the Star Trek Package. All of the unique graphic displays are greatly enhanced by the Green-Screen. Finally, the uncanny sound effects are produced by the CPU Monitor, which faithfully picks up the FOR, NEXT loops and other CPU patterns, which create the distinctive siren sounds that accompany the ALERT and DAMAGE messages along with the harsher notes of the weapons salvos. Once you've tried it, you won't any longer be satisfied with silent computer games.

Remember that with the Gaming Environment you also get all of the other excellent features of the CPU Monitor and the Green-Screen for non-gaming applications. You also save $5.00 off the combined cost of the individual items.

GAMING ENVIRONMENT..... $79.85
Add $3.50 for postage and handling

Terms: Check or money order, no CODs or credit cards, please. Add amount shown for postage and handling to price of the item. All items shipped within 48 hours by first class or priority mail. Virginia residents, add 4% sales tax.

✓29

Micro-Mega · P.O. Box 6265 · Arlington, Va 22206

✓Reader Service—see page 162

From page 39

gram has not yet been activated.

At this point, a set of "seed" civilizations can be created. This article includes a BASIC listing that will create 20 seed populations. (See Listing 6.)

TRS-80's video system has two kinds of blanks, represented by decimal values 32 (a character space) and 128 (a graphics blank). Both these characters appear the same to the eye, but have entirely different results in the Life program. When clearing the screen for use with Life, it is essential that character 128 (hexadecimal 80) be used. The following subroutine will produce the desired effect:

```
10 CLS
20 FOR X = 15360 TO 16383
30 POKE X,128
40 NEXT X
```

Program Listing 8. Clears the screen before jumping to Life.

Now a seed population can be created on this blank field. Here is a section of Listing 6:

```
2300 GOSUB 9999: REM * CLEARS SCREEN WITH CHAR 128
2310 FOR X = 15817 TO 15860
2320 POKE X,191
2330 NEXT X
2340 M% = USR(0)
```

Following the screen-clearing, these lines will POKE a graphics pattern into place that looks like this:



17

It is created from a dense bar of graphics cells, and will eventually follow the pattern shown in photos 18-21. Through the USR(0) command, the program now jumps to the machine language Game of Life routines.

The Action of the Program

The first action of the program is to save the BASIC stack pointer (line 280). The reason for this is that the program as a whole (the seed program and the Life program) will be using two stacks — one for the video display work area, and the other for the BASIC seed programs.

Next, the generation count is set to zero, and the upper and lower borders of the video workspace are blanked. This blanking is necessary because unwanted neighbors to cells in our real population may intrude upon the territory of our universe and produce mutant births.

Now the pattern on the screen is transferred to a scratchpad, or workspace, elsewhere in memory. Have you ever noticed the black streaks that detract from the continuity of the screen display when graphics are being drawn? There is a very short period of time when the video memory circuits must be taken over by the rest of the computer system in order to place information on the video screen, or, less often, to read information that is there.

The memory is taken out of the video scanning circuit for a very brief moment, so the display blanks out. The more times we need to dip into the video, the more black streaks there will be. In order to prevent our Life display from becoming a jittery mess, you can remove the information displayed as a block and place it elsewhere, where you can plunder it at will. The screen then remains passive until the altered block is transferred back to the monitor.

Two very important instructions appear in lines 610 and 760. These commands, which appear early in the program, load values into each of the two index registers available in the Z-80 microprocessor chip. In fact, without these two registers, you could not attain the speed of this game.

Program Listing 6. BASIC Seed Populations

```
10 CLS
15 ' SPACESHIP
20 PRINT@460,"PLAYING GOD WITH LIFE:
                *STARTS*
30 FORX=1TO2000:NEXT
40 PRINT"ENTER 1 FOR INSTRUCTIONS
      ENTER 2 FOR GRAPHICS CHARACTER LIST
      ENTER 3 FOR LIST OF SEED CHARACTER PROGRAMS"
50 PRINT:INPUT"ENTER 1, 2 OR 3";A
60 IFA=1GOTO100
70 IFA=2GOTO1000
80 IFA=3GOTO2000
100 CLS
110 PRINT"PLAYING GOD WITH LIFE MUST START WITH A BASE
    CIVILIZATION CREATED BY A SEED PROGRAM. THIS PROGRAM
    USES TRS-80'S GRAPHICS CHARACTERS SET, WHICH IS
    PRESENTED A BIT LATER IN THIS PROGRAM."
120 PRINT:PRINT"ASCII CHARACTER 128 -- CHR$(128) -- IS A
    GRAPHICS BLANK.ALL THE SEED PROGRAMS FIRST CLEAR THE
    SCREEN WITH THESE BLANKS,THEN PRODUCE A STARTING
    CIVILIZATION USING THE TRS-80 GRAPHICS  ";
121 PRINT"CHARACTERS.  FINALLY, THE SEED PROGRAMS JUMP INTO
    THE MACHINE LANGUAGE *LIFE* PROGRAM."
130 PRINT:PRINT"REMEMBER, YOU MUST HAVE ALREADY ENTERED THE
    *LIFE9* SYSTEMTAPE THAT PRECEDES THIS ";CHR$(34);
    "STARTS";CHR$(34);" SECTION, OR A FC ERROR?WILL BE
      GENERATED."
140 FORX=1TO10000:NEXT:CLS:GOTO40
1000 CLS
1010 FORX=128TO155STEP4
1020 PRINTX;CHR$(X),X+1;CHR$(X+1),X+2;CHR$(X+2),X+3;CHR$(X+3)
1025 PRINT
1030 NEXTX
1040 INPUT"PRESS ENTER TO CONTINUE";X
1045 CLS
1050 FORX=156TO183STEP4
1060 PRINTX;CHR$(X),X+1;CHR$(X+1),X+2;CHR$(X+2),X+3;
     CHR$(X+3):PRINT
1070 NEXTX
1080 INPUT"PRESS ENTER TO CONTINUE";X
1090 FORX=184TO191
1100 PRINTX;CHR$(X):PRINT
1110 NEXTX
1120 INPUT"ENTER 1 TO REVIEW, 2 TO RETURN";B
1130 IFB=1GOTO1000
1140 IFB=2GOTO40
2000 CLS:PRINT"ENTER THE NUMBER OF THE SEED PATTERN DESIRED:"
2010 PRINT"    1 - RANDOM              11 - ARCH (PI)
               2 - BOX                 12 - LONG BARGE
               3 - LONG BAR            13 - LARGE BLOCK
               4 - SMALL RANDOM GROUP  14 - GLIDERS
               5 - TALL BAR
2020 PRINT"     6 - MIXED SEEDS         16 - TALL RANDOM
                7 - 4 RANDOM GROUPS     17 - TWO ARCHES 90 DEG.
                8 - FLASHERS &  GLIDERS 18 - 2 DIAGONAL RANDOMS
                9 - THIN SQUARES        19 - THICK SQUARES
2030 PRINT"        10 - SPARSE RANDOM       20 - SURPRISE"
2040 PRINT:INPUT"ENTER 1 THROUGH 20";C
2050 ONCGOTO2100,2200,2300,2400,2500,2600,2700,2800,2900,3000,
     3100,3200,3300,3400,3500,3600,3700,3800,3900,4000
2100 GOSUB9999
2110 FORX=15360TO16383
2120 Y=127+RND(64)
2130 POKEX,Y
2140 NEXTX
2190 M%=USR(0):GOTO2000
2200 GOSUB9999
2210 POKE15829,183:POKE15830,149
2290 M%=USR(0):GOTO2000
2300 GOSUB9999
2310 FORX=15817TO15860
2320 POKEX,191
2330 NEXTX
2390 M%=USR(0):GOTO2000
2400 GOSUB9999
2410 FORX=15700TO15716:Y=127+RND(64):POKEX,Y:NEXTX
2420 FORX=15764TO15780:Y=127+RND(64):POKEX,Y:NEXTX
2430 FORX=15828TO15844:Y=127+RND(64):POKEX,Y:NEXTX
2440 FORX=15892TO15908:Y=127+RND(64):POKEX,Y:NEXTX
2490 M%=USR(0):GOTO2000
2500 GOSUB9999
2510 FORX=61TO67
2520 FORY=3TO42
```

Load the first index register (IX) with the first memory cell in the workspace. Index register IY is crucial; its value is the same as that of the new stack pointer. Initialize the stack at 7AEF (recall line 320), and now push six fresh zero bytes onto it (lines 710 to 740). In this way you can manipulate individual bytes near the top of the stack at will. These bytes are left on the stack, and the stack grows as the program progresses, but you still retain control over the contents without digging through the stack and piling heaps of bytes all about.

This extensive manipulation of data is necessary because of the crude but serviceable graphics in the TRS-80. A byte of data is eight bits wide; bits 0 through 5 normally define ASCII characters and control codes (carriage returns, etc.), and bits 6 and 7 are ignored. But in the TRS-80, these most significant bits cause the video circuit to switch from ASCII mode to graphics mode.

A zero in both bits 6 and 7 will produce the expected letters and numbers; but if either or both of these bits goes high, the computer triggers a group of circuits which switch out of ASCII mode, and produce a small graphics block for each of bits 0 through 5 which is also high. It is a simple, functional video system, certainly not high-resolution, but assuredly better than an entire block per character.

A diagram of a video memory cell and the bits responsible for each "hexant" is given in Fig. 1.




Fig. 1.

```
2530 SET(X,Y)
2540 NEXTY,X
2590 M%=USR(0):GOTO2000
2600 GOSUB9999
2610 FORX=15400TO15408:Y=127+RND(64):POKEX,Y:NEXTX
2620 FORX=15464TO15472:Y=127+RND(64):POKEX,Y:NEXTX
2630 FORX=16300TO16311:Y=127+RND(64):POKEX,Y:NEXTX
2640 FORX=16364TO16370:Y=127+RND(64):POKEX,Y:NEXTX
2650 FORX=15820TO15845:Y=127+RND(64):POKEX,Y:NEXTX
2690 M%=USR(0):GOTO2000
2700 GOSUB9999
2710 FORX=15360TO15370:Y=127+RND(64):POKEX,Y:NEXTX
2720 FORX=15424TO15434:Y=127+RND(64):POKEX,Y:NEXTX
2730 FORX=15413TO15423:Y=127+RND(64):POKEX,Y:NEXTX
2740 FORX=15477TO15487:Y=127+RND(64):POKEX,Y:NEXTX
2750 FORX=16373TO16383:Y=127+RND(64):POKEX,Y:NEXTX
2760 FORX=16309TO16319:Y=127+RND(64):POKEX,Y:NEXTX
2770 FORX=16320TO16330:Y=127+RND(64):POKEX,Y:NEXTX
2780 FORX=16256TO16266:Y=127+RND(64):POKEX,Y:NEXTX
2790 M%=USR(0):GOTO2000
2800 GOSUB9999
2810 POKE15993,130:POKE15994,155:POKE15857,182:POKE15858,144:
     POKE16309,167:POKE16310,129
2820 POKE15570,183:POKE15571,149:POKE16060,183:POKE16061,149:
     POKE15364,183:POKE15365,149
2830 POKE16160,183:POKE16161,149
2890 M%=USR(0):GOTO2000
2900 GOSUB9999
2910 FORX=20TO40:SET(X,5):SET(X,17):NEXTX
2920 FORY=5TO17:SET(20,Y):SET(40,Y):NEXTY
2930 FORX=77TO95:SET(X,28):SET(X,41):NEXTX
2940 FORY=28TO41:SET(77,Y):SET(95,Y):NEXTY
2990 M%=USR(0):GOTO2000
3000 GOSUB9999
3010 FORX=15360TO16383STEP3
3020 Y=127+RND(25)
3030 POKEX,Y
3040 NEXTX
3090 M%=USR(0):GOTO2000
3110 POKE15839,151:POKE15840,149
3120 M%=USR(0):GOTO2000
3200 GOSUB9999
3210 POKE15830,150:POKE15831,148:POKE15894,137:POKE15895,129
3290 M%=USR(0):GOTO2000
3300 GOSUB9999
3310 FORX=45TO85:FORY=9TO29:SET(X,Y):NEXTY,X
3390 M%=USR(0):GOTO2000
3400 GOSUB9999
3410 POKE15498,160:POKE15499,185:POKE15950,167:POKE15951,129
3490 M%=USR(0):GOTO2000
3500 GOSUB9999
3510 POKE15746,144:POKE15747,160:POKE15810,164:POKE15811,176:
     POKE15812,149
3590 M%=USR(0):GOTO2000
3600 GOSUB9999
3610 FORX=15392TO16383STEP64
3620 Y=127+RND(64):POKEX,Y:NEXTX
3630 FORX=15393TO16383STEP64
3640 Y=127+RND(64):POKEX,Y:NEXTX
3690 M%=USR(0):GOTO2000
3700 GOSUB9999
3710 POKE15820,151:POKE15821,149:POKE15859,183:POKE15860,145
3790 M%=USR(0):GOTO2000
3800 GOSUB9999
3810 FORX=15360TO16383STEP69:Y=127+RND(64):POKEX,Y:NEXTX
3820 FORX=15424TO16319STEP59:Y=127+RND(64):POKEX,Y:NEXTX
3890 M%=USR(0):GOTO2000
3900 GOSUB9999
3910 FORX=16TO36:FORY=2TO5:SET(X,Y):NEXTY,X
3920 FORX=16TO20:FORY=6TO9:SET(X,Y):NEXTY,X
3930 FORX=32TO36:FORY=6TO9:SET(X,Y):NEXTY,X
3940 FORX=16TO36:FORY=10TO13:SET(X,Y):NEXTY,X
3950 FORX=48TO57:FORY=24TO38:SET(X,Y):NEXTY,X
3960 FORX=50TO55:FORY=28TO34:RESET(X,Y):NEXTY,X
3990 M%=USR(0):GOTO2000
4000 GOSUB9999
4010 FORX=15360TO16383:Y=RND(255):POKEX,Y:NEXTX
4090 M%=USR(0):GOTO2000
9998 GOTO9998
9999 FORX=15360TO16383:POKEX,128:NEXTX:RETURN
READY
>_
```

Recall that the Game of Life rule requires that we look at each neighbor of a cell. If each block were a single byte-sized entity, we could evaluate its neighbors quickly and easily: The one above, the one below, left and right, and the four corners. But this TRS-80 bit system makes things quite nasty. If we label a cell X, and it lives in memory location A, what are its eight immediate neighbors? Well, there's more to know. What bit position does this upstart X occupy in a byte? Okay, let's arbitrarily say X resides comfortably in bit position zero, thus:

```
   A
 x 1
 2 3
 4 5
```

Okay, seems easy. First neighbor, to the right, is bit 1; clockwise, the next is bit 3; then clockwise again it is bit 2. Pretty safe so far. Next neighbor clockwise is . . . hmmmm . . . memory location A minus one, uh . . . . bit 3. Better draw that:

```
A-1   A
 0 1  x 1
 2 3  2 3
 4 5  4 5
```

Yes, fine. Next neighbor further clockwise is memory location A minus 1, bit 1. Still safe. But then, what about the next neighbor clockwise? It's a line above on the screen, and back a space. Since our screen is 64 characters wide, this is back 64 and back one more. Now we've got to look at bits in A minus 65 and probably, if intuition serves, in location A minus 64 too. We'd better draw it.


```
A-65   A-64
 0 1    0 1
 2 3    2 3
 4 5    4 5

 0 1    x 1
 2 3    2 3
 4 5    4 5


A-1     A
```

Yes, intuition is correct. We've got to check A minus 65, bit 5, and

Continue to page 46

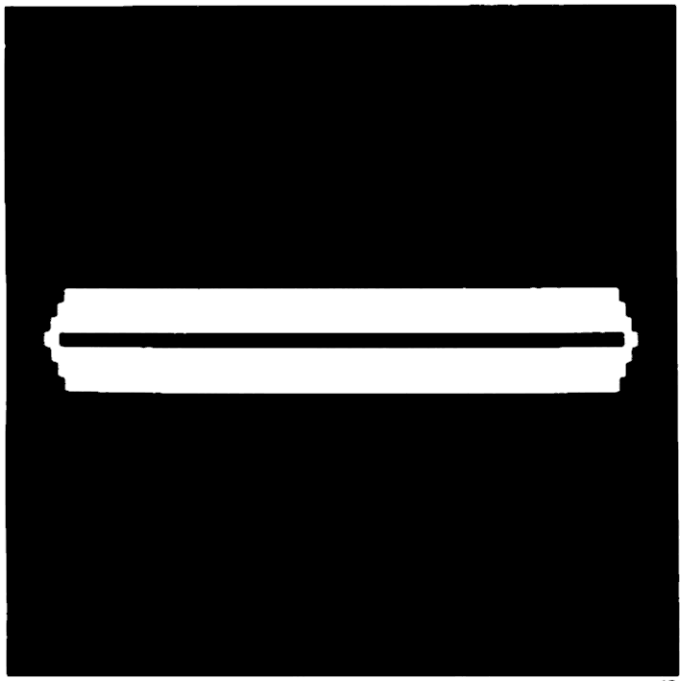

18

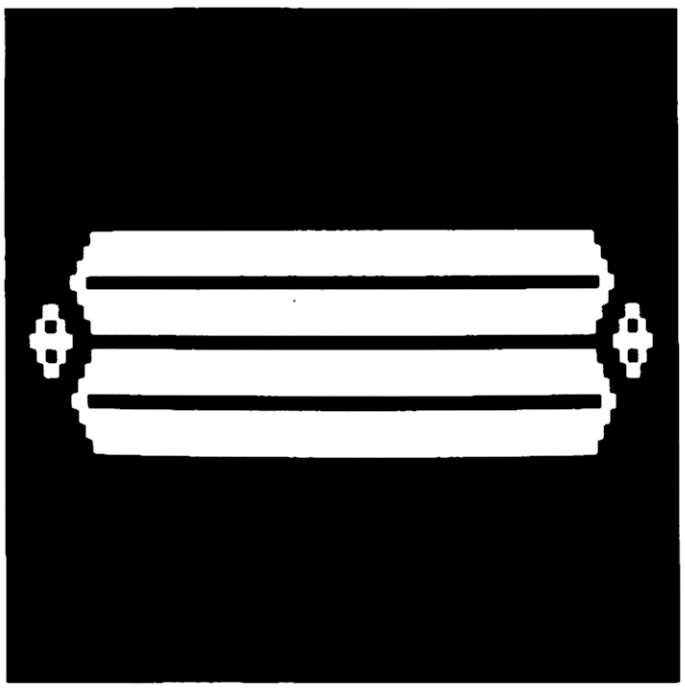

19

A minus 64, bits 4 and 5. That's quite a lot of manipulation there, and there are six different bit possibilities for every memory location! And to make matters worse in terms of speed, a machine operation to check the presence of a bit is itself four bytes long.

Get a Cup of Coffee


If this were in my living room and not a magazine article, I would invite you to have a cup of coffee, sit back, and clear your mind. It took me three months and eight versions of the program to discover the key to speedy operation.

My solution to the fast Game of Life algorithm would not have been possible if the designers of the TRS-80 had chosen another of the popular microprocessor chips. The two index registers—16-bits wide—are needed, so also are relative jump instructions, bit test and manipulation, and an extensive stack movable anywhere in memory. The index register, you may recall, allows you to store and adjust data within a certain geography of the register's base value. You may, for example, change the contents of memory location IX, IX-32, IX + 17 and so forth. The relative jump instruction is one byte shorter than an absolute jump, saving considerable time in this program requiring thousands of jumps.


Finally, we need to preserve not only the BASIC stack (which is fairly large) for use with the seed programs, but also maintain an extensive stack of values analogous to the video pattern we are adjusting.

We know further that a check of all the cells in a given memory location must be made; thus, our algorithm for cell checking should probably be done within the context of one memory address at a time. If there are six cells in a video memory location with eight

Continue to page 48

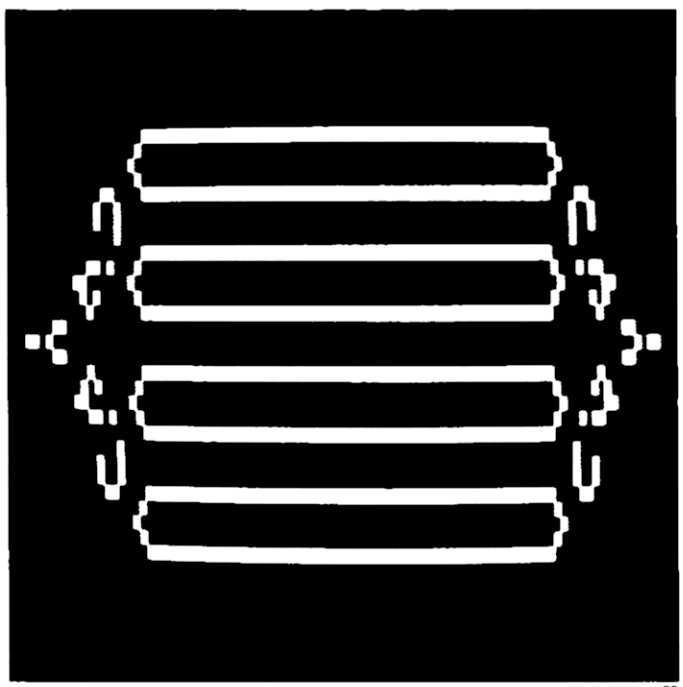

20

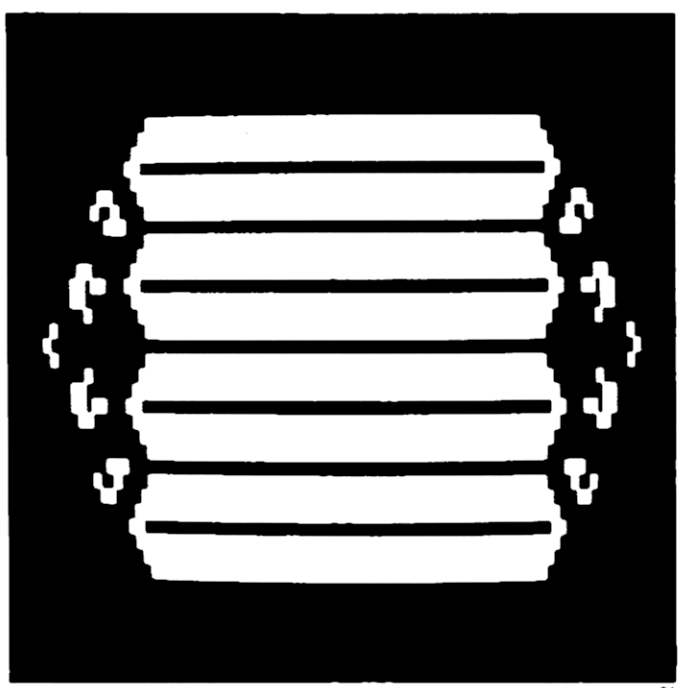

21

Photos 18-21: A long bar universe created from several hundred cells, at birth; generations 2, 6, 13, and 14.

NEECO PROUDLY INTRODUCES COMMODORE'S NEW 8000 SERIES (80 column) COMPUTERS



$1695 (available May/June '80)

CBM™ 8000 SERIES BUSINESS COMPUTERS

The new Commodore 8000 series computers offer a wide screen display to show you up to 80-character lines of information. Text editing and report formatting are faster and easier with the new wide-screen display. The 8000 series also provides a resident Operating System with expanded functional capabilities. You can use BASIC on the 8000 computers in both interactive and program modes, with expanded commands and functions for arithmetic, editing, and disk file management. The CBM 8000 series computers are ideally suited for the computing needs of the business marketplace.

SCREEN
2000 character display, organized into twenty-five 80-column lines
64 ASCII, 64 graphic characters
3 x 8 dot matrix characters
Green phosphor screen
Brightness control
Line spacing: 1½ in Text Mode
1 in Graphics Mode

KEYBOARD
73-key typewriter style keyboard with graphic capabilities
Repeat key functional with all keys

MEMORY
CBM 8016: 16K (15359 net) random access memory (RAM)
CBM 8032: 32K (31743 net) random access memory (RAM)

POWER REQUIREMENTS
Volts: 110V
Cycles: 60 Hz
Watts: 100

SCREEN EDITING CAPABILITIES
Full cursor control (up, down, right, left)
Character insert and delete
Reverse character fields
Overstriking
Return key sends entire line to CPU regardless of cursor position

INPUT/OUTPUT
Parallel port
IEEE-488 bus
2 cassette ports
Memory and I/O expansion connectors

FIRMWARE
24K or ROM contains:
BASIC (version 4.0) with direct (interactive) and indirect (program) modes
9-digit floating binary arithmetic
Tape and disk file handling software

The 8000 Series will be available May/June '80

Model 8016	Model 8032	2040 Dual Floppy
$1495	**$1795**	**$1295**

CBM™ 8050 DUAL DRIVE FLOPPY DISK

The CBM 8050 Dual Drive Floppy Disk in an enhanced version of the intelligent CBM 2040 Disk Drive. The CBM 8050 has all of the features of the CBM 2040, and provides more powerful software capabilities, as well as nearly one megabyte of online storage capacity. The CBM 8050 supplies relative record files and automatic diskette initialization. It can copy all the files from one diskette to another without copying unused space. The CBM 8050 also offers improved error recovery and the ability to append to sequential files.

HARDWARE SPECIFICATIONS
Dual Drives
Two microprocessors
974K Bytes storage on two 5.25" diskettes (ss)
Tracks 70
Sectors 17-21
Soft sector format
IEEE-488 interface
Combination power (green) and error (red) indicator lights
Drive Activity indicator lights
Disk Operating System Firmware (12K ROM)
Disk Buffer (4K RAM)

FIRMWARE
DOS version 2.0
Sequential file manipulation
Sequential user files
Relative record files
Append to sequential files
Improved error recovery
Automatic diskette initialization
Automatic directory search
Command parser for syntax validation
Program load and save



CBM™ IEEE MODEM

SPECIFICATIONS
*Full or half duplex operation
*300 bits per second
*Standard IEEE 488 interface
*Switch selectable originate, off, answer-full duplex, test, half duplex
*Visible indicators are transmit data, receive data, carrier ready, test
*Frequency shifted modulation
*Bell 103/113 compatible

Available June/July

$395

"Exceptional performance - even on noisy phone lines"

*CBM is a registered trademark of Commodore. All prices and specifications are subject to change without notice.

NEECO ↙143
679 Highland Ave.
Needham, MA
02194

Mon-Fri 9:30-5:30
MasterCharge &
Visa Accepted

(617) 449-1760
Telex: 951021

MICROAMERICA DISTRIBUTING
"Nationwide distributors of Computer Equipment"
21 Putnam Street
Needham, MA
02194

(617) 449-4310

neighbors each, that comes to a total of 48 evaluations.

Before your cup of coffee, we were attempting to test a cell and all of its neighbors. If we test cell X in bit 0 of memory location A, then bit 1 is among its neighbors. Later, we will need to know, for example, the neighbors of bit 2 in memory location A. Or the neighbors of bit 3. Or the neighbors of bit 5 in memory location A minus 64. If we make our cell checks independent of each other, we will be engaging in enormous redundancy. If cell X has eight neighbors, then doesn't it follow that cell X is itself the neighbor of eight other cells, including the ones just mentioned? Aha!

Examine the diagram below.

```
5 4 5 4

1 0 1 0
3 2 3 2
5 4 5 4

1 0 1 0
```

Here we have a video memory address together with all the individual cells that can be considered its immediate neighbors. In all, only 20 cells need to be examined to determine the fate of all six beings in that memory address. Let us now assign this memory address to register IX; all the needed addresses are well within the relative addressing range of IX: IX – 65, IX – 64, IX – 63, IX – 1, IX, IX + 1, IX + 63, IX + 64 and IX + 65.

Return again to the assembly listing, beginning at line 800. This is the test for bit 5 in address IX – 41 (the listing uses hexadecimal notation since the screen is numbered in even blocks of 40 hex). Twenty bit tests are made, identical to the pattern described above.

What is done with the result of each bit test? You could store the result, using standard instructions, elsewhere in memory, incrementng to the next or decrementing to the previous address as necessary. But this process consumes considerable time, and requires that flag resisters be saved, addition or subtraction be performed and so forth.


Instead, look at lines 710 through 760. Here, you may recall, six empty bytes were pushed onto the stack, and the IY register was given to the top (actually, to the bottom, as the Z-80 stack moves downward in memory) stack value. If each byte in the stack represents one bit or being, then IY can sum the neighbors of being (bit) 5, IY + 1 can hold the total neighbors for bit 4, and so on. This is a terrible waste of memory, you may insist; I agree. It is, however, the fastest way of completing the Game of Life computations using the 80's complex graphic bit system.

Is Your Neighbor Alive?


Let's follow this process through. Bit 5 of IX – 41 is tested. If the neighbor is alive (result of the bit test equals one), increment the value stored in IY + 5. If not, skip it, going on to test bit 4 of IY – 40. If this neighbor is alive, increment the value stored in IY + 5 and IY + 4. Why in two locations? Because bit 4 of IY – 40 is neighbor to two cells in our memory location, cell 0 and cell 1. If this neighbor is not alive, skip to the next test.

Time for more coffee. Just to be sure, follow each bit test in lines 800 through 1670 of the assembly listing. Test a bit. Is it alive? If so, add one to the stack byte representing the memory cells to which it is a neighbor. If not, go on. Make 20 tests. When all the checks ar complete, the six-byte stack will contain the total number of neighbors for each bit in the memory address under observation. Finally (line 1680), the memory address under test is advanced. The jump to HOLD shown in line 1700 is one of the special features of Playing "God" with Life, so for the moment, ignore this command.

At line 1740, the BC register is decremented and tested; if all 1,024

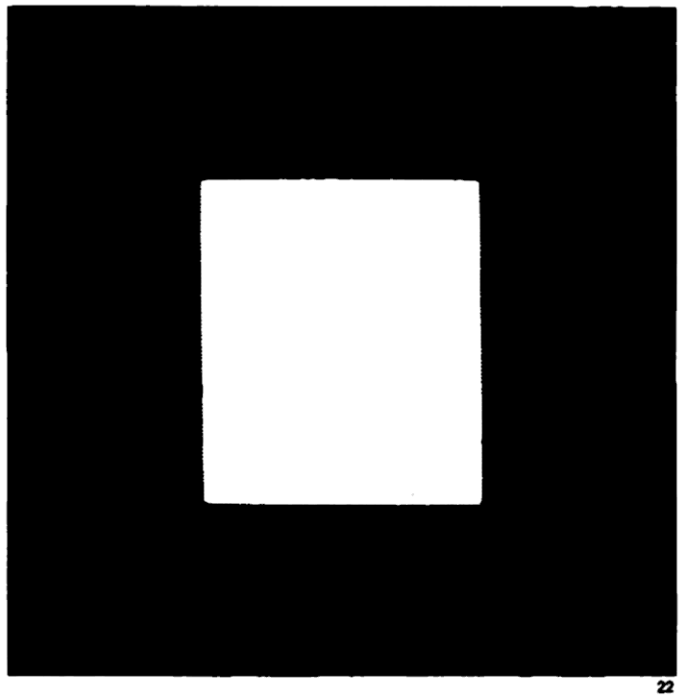

22

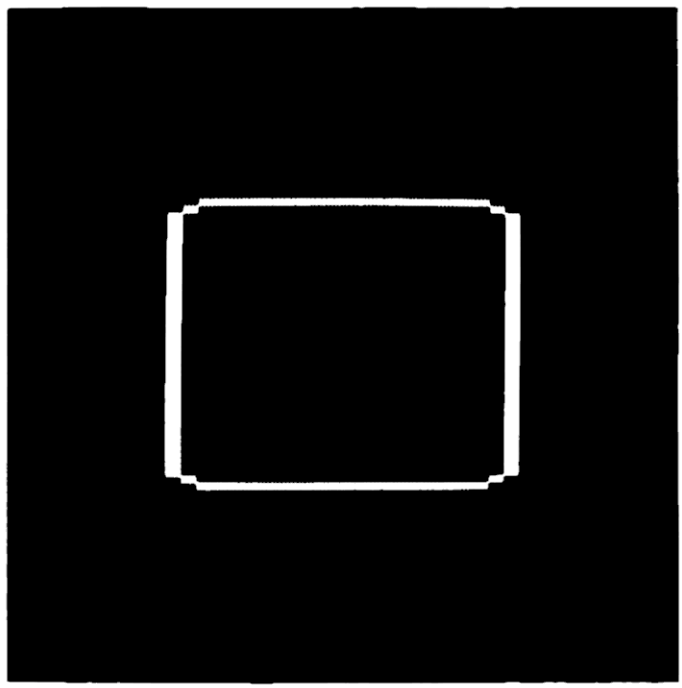

23

bytes (400 hex) video memory locations have been checked, the process ends. If not, we go back to line 670 and PUSH six more zero bytes onto the stack, each representing a bit in our next universe location. Earlier I mentioned that an extensive movable stack is important to the operation of this Life algorithm; with six bytes assigned to each universe location, and 1,024 locations to examine, this results in a fairly monumental stack more than 6K bytes deep!

When the examination process is complete, how do we make our changes? First, let's see where we are. You have the initial generation on the screen, a duplicate of it in a workspace, and 6,144 bytes of stack. Your object is to evaluate the stack values, a byte at a time, and alter their corresponding cells according to the result.

At the top of the stack is the last cell evaluated. We begin the generation change process at the last memory address in workspace, STORE + 3FF (line 1830). POP a register off the stack, and compare the first byte to 2. If it is 2, remembering Conway's rule,

Continue to page 50

BUSINESS CONTROL PROGRAMS

☐ PAYROLL ☐ GENERAL LEDGER ☐ ACCOUNTS PAYABLE ☐ ACCOUNTS RECEIVABLE

These business systems are designed with the business manager in mind. Major changes in your current bookkeeping methods are not necessary to make these programs work for you. Data may be entered into any one of the systems either directly or through subprograms, so that duplicate data entry is not required. This avoids mistakes.

Accurate reports of financial activity may be obtained on a scheduled basis or at irregular intervals.

The systems require CP/M and CBASIC. Customization, installation and training are available at additional cost. WRITE FOR SAMPLE REPORT AND TRIAL DISK—$25.00 (credited toward purchase price).

- **A Totally Linked Single Entry Accounting System**
- **Completely Screen Oriented Systems Provide User Prompting for Each Entry**
- **User Assignable Account Numbers**
- **Flexible, Reliable and Efficient**
- **Installation and Training Available**

AS LOW AS **$250.00 ea.**

CP/M 2.2 Control Program for Microcomputers Enabling You to Run Software Published for CP/M 1.4 on the TRS-80 Model II (Including Communications Programs)

CP/M®2

FMG CORPORATION

VISA

CP/M is considered the industry standard disk operating system because it gives you the hardware-independent interface you need to make your computer work for you. FMG CORPORATION NOW OFFERS THE CP/M 2.2 FOR THE TRS-80 MODEL II. The latest in the evolution of a reliable and efficient software system, CP/M 2.2 features an enhanced upward compatible file system and powerful new random access capabilities. From minidisks and floppy disks, all the way to high-capacity hard disks (when available), the flexibility of CP/M 2.2 makes it a truly universal operating system. The package includes an 8" system disk, editor, assembler, debugger and communication software for the TRS-80 Model II. Special utilities not available with other CP/M systems are also included in FMG's CP/M 2.2

(CP/M is a registered trademark of Digital Research Corp. TRS-80 is a registered trademark of Radio Shack)

$200.00

From the ORIGINATOR of the **TRS-80® PROJECT**

FMG CORPORATION

master charge

THE PASCAL/MT As Low As $250.00

PASCAL/MT™, a native code PASCAL compiler designed for 8080/8085 and Z80 microcomputer systems, provides an efficient development cycle as well as efficient execution of object programs.

- Compiler executes under the CP/M operating system in as little as 32 K bytes of RAM
- Interactive Symbolic Debugger which enables the programmer to examine variables, set a breakpoint, and trace procedure calls interactively at run time
- Compiles at the rate of 600 lines per minute on a 2 MHZ 8080
- Programs Execute up to 10 TIMES FASTER than popular interpretive Pascals
- The code generated is 8080 object code which is ROMable with a minimum run time overhead of 1.5K bytes
- Interrupt procedures allow the programmer to write interrupt drivers for I/O and other real time tasks in Pascal/MT
- Bit manipulations of variables may be performed with the built-in procedures: SETBIT, CLRBIT, TSTBIT, SHL, SHR, SWAP, LO, HI.
- Assembly language subroutines may be called from Pascal/MT
- Business arithmetic version of Pascal/MT is also available
- Pascal data structures supported are: ENUMERATION AND SUBRANGE TYPES, RECORD, ARRAY, REAL, INTEGER, CHAR, and BOOLEAN
- Not implemented are: SETS, GOTO, GET, PUT

PASCAL/MT™ includes compiler and a real time symbolic debugger. The system requires 32K minimum and 2 mini disks or one 8" disk.

P.O. Box 16020
Ft. Worth, Texas 76133 ↙12
Phone (817) 294-2510


M443 **Send for FREE CATALOG**



BACK TO BASIC

THE BOOK

ACCESSING THE TRS-80* ROM

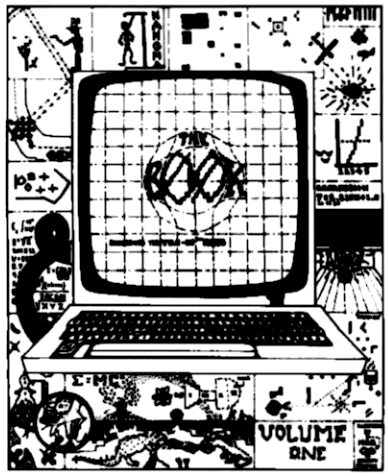

If you ever do Assembly language programming, or you just want to know more about your TRS-80 ROM, "THE BØØK" is for you.

Volume I will give you access to over fifty machine language subroutines in the Radio Shack Level II BASIC. It includes information on the numeric data formats and a commented listing of the ROM routines.

"THE BØØK, Volume I", encompasses all arithmetic functions and mathematical operations. There are separate routines for integers, single precision, and double precision numbers and the data format for each of these number types is explained. The routines that perform ASCII to binary and binary to ASCII conversion are identified and explained to provide you a means of data I/O.

A fully commented listing provides the details on the step-by-step execution of these ROM routines. Although a complete disassembly is not provided in order to avoid copyright infringement, you can obtain a complete disassembly using the disassembler program listed in "THE BØØK." Volume I also includes a complete, detailed memory map of the entire machine and a symbol table noting over 500 addresses.

"THE BØØK" will save you hour upon hour of assembler program development time. Don't start programming without it.

Order your copy of "THE BØØK", today!

DEALER INQUIRIES INVITED

Insiders Software Consultants, Inc.
P.O. Box 2441, Dept. M 1
Springfield, VA 22152 ✓305

*TRS-80 is a trademark of Tandy Corp.

☐ **Please send me Volume I of THE BØØK at $14.95 plus $1.50 for postage.**

NAME: _____

ADDRESS: _____

CITY, STATE _____ & ZIP CODE: _____

☐ Check payable to Insiders Software Consultants, Inc.
☐ MASTER CHARGE MC Bank Code:
☐ VISA Exp. Date: Card Number:


Signature: _____

the current contents of a cell remain unaltered—no birth, no death. If it is not 2, compare it to a 3. If it is a three, then a cell must be given birth, as in line 1920. (If a live cell is already in place, this action has no effect, but still satisfies the Life rule.) A more exhaustive test is only redundant.


Finally, if our byte is neither 2 nor 3 (the number of neighbors), then of course it must be less than 2 (lonely) or greater than 3 (overpopulated) and Conway's rule stipulates that in such a circumstance, the cell cannot live. Line 1900 resets (turns off, or kills) this bit.

Line 1930 examines the next byte in the same terms. Although the POP-and-test pattern is identical for all three byte pairs, a CALL to subroutine is not used in the interest of speed. In fact, in the entire Playing "God" with Life program, memory is almost always sacrificed in the interest of speed. This program uses six times the

Continue to page 52

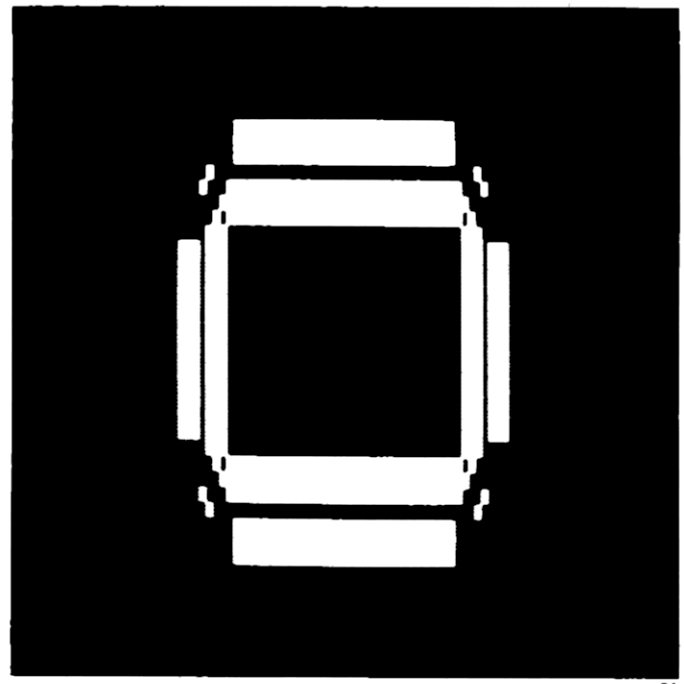

24

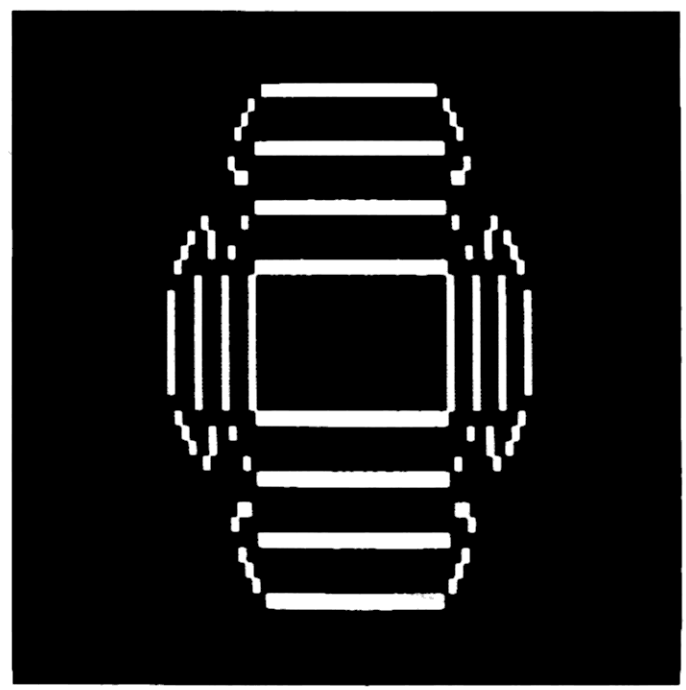

25

THERE IS A DIFFERENCE IN TRS-80 DISK DRIVES CAPACITY

Expansion interface – gives your TRS-80 the disk capacity it needs, and much, much more!

10 to 40 MByte, 8" Winchester drive – expands capacity far beyond Model II storage.

Single sided minifloppy – up to 150 KBytes of storage capacity.

Single or double sided 8" floppies – up to 2.5 MBytes in dual drive cabinet – for the serious TRS-80 user.



NOW: ALL DRIVES COMPATIBLE WITH MODEL II

LOBO DRIVES' new family of disk memory products provides you with a choice of memory capacities you need to effectively execute the complex business software you've developed for your TRS-80*. LOBO DRIVES' selection of readily available, software compatible drives permits you to expand your inventory, payroll, customer list, and accounts receivable files as your business grows.

And LOBO DRIVES brings you more . . . a new plug-in expansion interface that provides an easy way to add hardware enhancements, communications capability, and programmable features . . . and it comes with the LOBO DRIVES famous 1 year, 100% parts/labor warranty.

Call or write for the complete LOBO DRIVES story. Find out just how competitively priced a family of high capacity drives can be . . .

LOBO drives

935 Camino Del Sur Goleta, California 93017.
(805) 685-4546

"CAN YOU REALLY AFFORD TO PAY LESS?"

Quantity discounts available – Dealer inquiries invited

TR-2

Yes, I want to know more about LOBO Drives and what they can do for my TRS-80. Send me information on:

- ☐ 5 1/4-in. Floppy drive
- ☐ 8-in. Winchester hard disk, 10 Mbyte drive
- ☐ 8-in. Floppy drive Single sided Double sided
- ☐ Double density expansion interface

Name _____

Company _____

Address _____

City _____ State _____ Zip _____

Phone No. _____

If dealer, provide resale no. _____

*TRS-80 is a registered trademark of Radio Shack, a Tandy Company.

15 INTERNATIONAL

Reader Service – see page 162

memory that a slower program would. But for advanced games, the Level II 16K TRS-80 is fairly standard. Were this program a utility, the space would be crucial, but for Life, it's whatever makes the game most effective.

When six byte evaluations are completed, you have altered one memory address in your workspace. At line 2350, decrement the workspace value, and decrement the loop counter. When this process is complete (1,024 evaluations), it is just about time to restore the newly derived generation to the screen.


This is a flat world, this video screen, yet the memory itself is not set up that way. The display wraps around contiguous memory locations: 3C3F (the last location in the first row) is neighbor to 3C40 (the first location in the second row). Lines 2480 through 2550 reset a thin line of memory cells on one side of the screen (actually, at this point, in the workspace). This action provides the remainder of the "border of pestilence" set up earlier for the top and bottom rows of the display. Finally, at lines 2590 to 2620, the workspace is restored to the video monitor, and the new generation comes into view.

The balance of this program is taken up with the special features, including display hold, a generation count, return to the BASIC program, and the "god" control, in actuality only a cursor, flashing on and off over the top of the current contents of four contiguous video positions.


A check of the generation status flag is made beginning at line 2660. If the user selects a generation count display when the question is posed in the original instructions, the generation counter is incremented, converted to decimal, and finally to ASCII characters (lines 2710 through 3020). Since the numerals themselves can influence future generations, it is necessary to sweep clear a path around them. This is done in lines 3070 to 3180, where the bordering bits are reset.

Earlier, we ignored a command to jump to the HOLD routine before re-evaluating the generation. You can depress letter H on the keyboard to freeze the current display on the screen (lines 3220 through 3250); or you can return to BASIC by depressing letter X, after first restoring its original stack pointer (lines 3260 through 3300). Finally, you can "play god" by pressing the G, and the program is diverted to a series of routines beginning at line 3430.

This controlling cursor is initiated at the top left of the screen (lines 3430 through 3520). A short delay allows a comfortable flashing rate. The keyboard is then scanned for three groups of commands: motion commands (the four keyboard arrows); activity commands (bear or kill, letters B or K); and the cancel command (return to mortality, letter M).

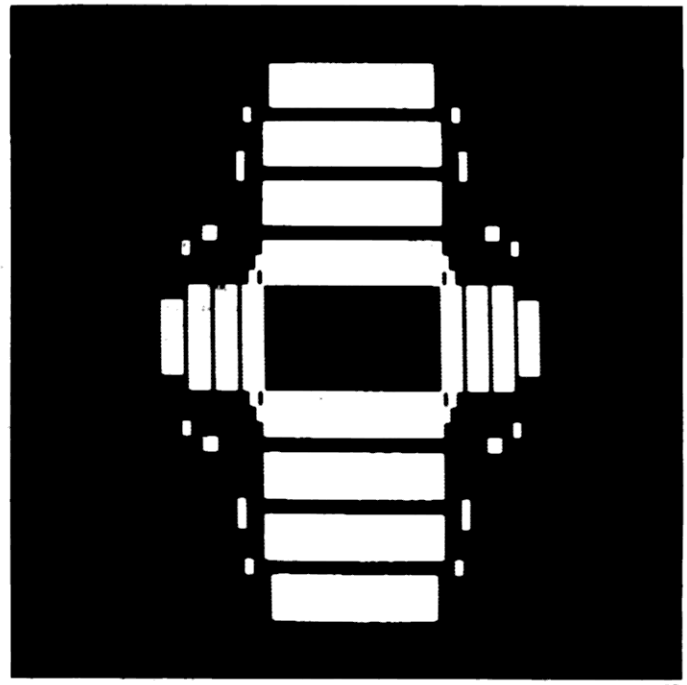

26

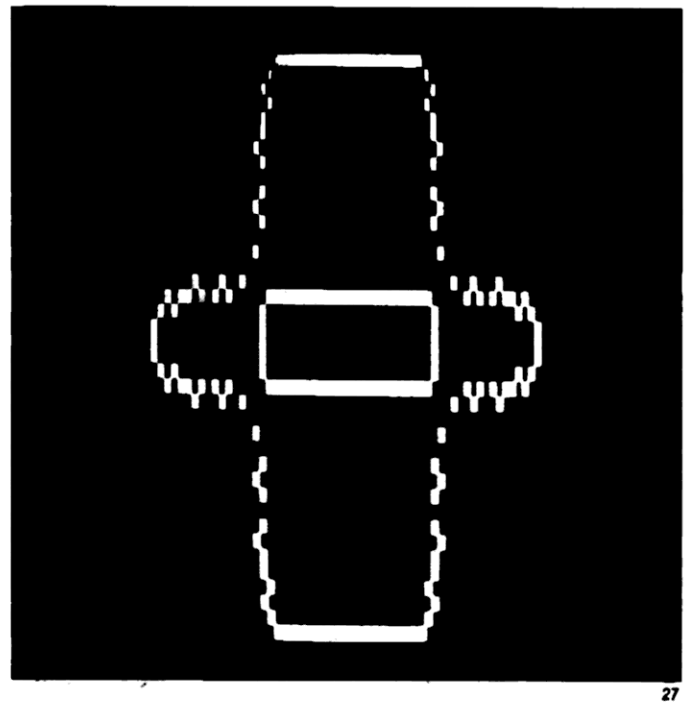

27

Photos 22 - 27: A symmetrical block (the 4:3 ratio of graphics blocks in the TRS-80 accounts for the vertical elongation), at birth; generation 1, 4, 7, 8, and 9.

4 SPEED OPTIONS FOR YOUR TRS—80!

The SK—2 is the most versatile clock modification available for the TRS—80. Speeds may be switched between normal, a reliable increase of 50%, or a 50% reduction; selectable at any time without interrupting execution or crashing the program. Instructions are also given for a 100% increase to 3.54 MHz (your TRS—80 may not be reliable at this speed). It may be configured by the user to change speed with a toggle switch or on software command. It will automatically return to normal speed any time a disk is active, requires no change to the operating system, and has provisions for adding an LED to indicate when the computer is not at normal speed. It mounts inside the keyboard unit with only 4 necessary connections for the switch option (switch not included), and is easily removed if the computer ever needs service. The SK—2 comes fully assembled with socketed IC's and illustrated instructions. Complete satisfaction is guaranteed. **SK—2.....$24.95**

PROGRAM INDEX FOR DISK BASIC

Assemble an alphabetized index of your entire program library from disk directories. Program names and free space are read automatically (need not be typed in) and may be alphabetized by disk or program. The list may also be searched for any disk, program, or extension; disks or programs added or deleted; and the whole list or any part sent to the printer. Finally, the list itself may be stored on disk for future access and update. Reviewed in the January issue of 80 Microcomputing. One drive and 32K required. **INDEX.....$19.95**

DUPLICATE SYSTEM TAPES WITH "CLONE"

This machine language program makes duplicate copies of ANY tape written for Level II. They may be SYSTEM tapes (continuous or not) or data lists. It is not necessary to know the file name or where it loads in memory, and there is no chance of system co—residency. The file name, entry point, and every byte (in ASCII format) are displayed on the video screen. Data may be modified before copy is produced. **CLONE.....$16.95**

EDIT BASIC PROGRAMS WITH ELECTRIC PENCIL

This program allows disk users to load Basic programs or any other ASCII data file into the disk version of Electric Pencil for editting. Edit line numbers, move or duplicate program segments, and search for the occurance of any group of characters. One command from DOS quickly modifies existing files to Pencil format. **PENPATCH.....$9.95**

SPOOLER FOR PARALLEL PRINTERS

This program is a full feature print formatting package featuring user defineable line and page length (with line feeds inserted between words or after punctuation), screen dump, keyboard debounce, and printer pause control. In addition, printing is done from a 4K expandable buffer area so that the LPRINT or LLIST command returns control to the user while printing is being done. Ideal for Selectric or other slow printers. Allows printing and processing to run concurrently. **SPOOLER.....$16.95**

RAM TEST FOR LEVEL II

This machine language program tests memory chips for open or shorted address or data lines as well as intermittents. It tests each BIT for validity and each BYTE in the execution of an actual instruction as in real program execution. Bad addresses are displayed along with the bad data and proper data. One complete test of 48K takes just 14 seconds. Also includes a test for errors induced by power line glitches from external equipment. **RAMTEST.....$9.95**

INSIDE LEVEL II

Inside Level II is a comprehensive reference guide to the Level II ROMs which allows the machine language programmer to easily utilize the sophisticated routines they contain. Concisely explains set—ups, calling sequences, variable passage, and I/O routines. Special consideration is given to disk systems. Part II presents an entirely new composite program structure which loads under the SYSTEM command and executes in both Basic and machine code with the speed and efficiency of a compiler. In addition, the 18 chapters include a large body of other information useful to the programmer.
INSIDE LEVEL II.....$15.95

Please include .75 postage. California residents add 6% sales tax.
All programs are usually shipped on cassette. Add $4.00 for disk. Complete satisfaction or full refund.

MUMFORD MICRO SYSTEMS

Box 435—E Summerland, California 93067 (805) 969—4557 ✓144

Scanned by Ira Goldklang - www.trs-80.com

Upon the choice of bear or kill, an asterisk appears, isolating the six points in one memory location. Pressing the appropriate number (0 through 5) will set or reset that bit (lines 4090 through 4770), changing one cell on the screen. Pressing M (mortality) returns to the start of the generation checks, so that any change wrought by the cursor will be incorporated into the next generation of beings.

Flaws, Frustrations and Bedevilment

The individual graphics block visible on the screen is actually a matrix of three dots by four dots. Because of this, symmetrical images will appear vertically elongated. Also, the universe is nearly twice as wide as it is high. Both these flaws are inherent to the TRS-80's video graphics system.

One additional game variable is that the controlling cursor can march omnipotently through any part of memory. Holding the down arrow causes the cursor to disappear off the bottom of the video screen. This little bedevilment will allow "god" to be marched through any part of memory, and the bear or kill commands can be used in any part of RAM (or even on the memory-addressed ports). This invisible action can crash a program or wreak any kind of havoc — something I consider a nice touch.

If your preference is speed over size, it is easy to revise this program to use the 32-character mode. Remember, of course, that alternate, even-numbered memory locations are addressed in this video format, and that the location of the large-character flag is port 255, bit 3 (1 = on, 0 = off). Normal video is always restored whenever the Life program returns to BASIC. With these alternatives, the program's speed will be doubled to nearly 150 generations per minute.

Another modification, not to the software, but to the hardware, yields something I have found very pleasant to watch: Surplus monitors with the slow green phosphor are available in the $40 range, and although it is nearly impossible to read normal (64 character per line) text with them, the Life displays appear with high resolution, and the slow phosphor imparts an eerie, organic appearance.

Acknowledgments and Conclusion

Thanks are due to Philip K. Hooper, a programmer and mathematician, for his inspiring version of Life and Serpent for the KIM; and to Claire Manfredonia, who suggested that a deity could visit this electronic universe of beings to intervene with fate.

I have received a few comments regarding my use of the "god" cursor. No offense was intended; rather, I feel that control even when playing a game, should be approached with caution and even fear. It is surprising to consider the amount of violence embedded and assumed a part of computer games. ■

Bibliography

The subject of Conway's Game of Life has been covered well in other sources over the past decade. The following articles are selected from among the dozens published since the game's introduction:

"Mathematical Games: The Fantastic Combinations of John Conway's New Solitaire Game, 'Life'", Martin Gardner, *Scientific American*, October 1970, pp. 120ff.

"Mathematical Games: On Cellular Automata, Self-Reproduction, the Garden of Eden and the Game 'Life'", Martin Gardner, *Scientific American*, February 1971, pp. 112ff.

The following references are from *Byte*, December 1978:

"Life with Your Computer", Justin Milliun, pp. 45-50; "Some Facts of Life", David J. Buckingham, pp. 54-67; "Programming Quickies: Life", William Englander, pp. 76-82; "One-Dimensional Life", Jonathan K. Millen, pp. 68-74.

"Life Algorithms", Mark D. Niemiec, *Byte*, January 1979, pp. 90-97.

This Weekend:
STIK IT.... ..to your TRS-80



That's right! Esmark's VIDIET-STIK light pen has the TRS-80 CONNECTION for LEVEL I & II. Your 4K to 48K TRS-80 System will come alive under your VIDIET-STIK within minutes of its arrival. That's because there are no wires to solder or traces to cut. You're up and running as fast as you can plug the interface into your system's cassette EAR-jack, CLOAD our custom LIGHT-WAVE demonstration software and RUN. And because the interface has a plug for your recorder, you won't have to unplug it again when loading your other software tapes. The interface allows them to pass right thru whenever you're not using the pen. It's exclusive "switched tip" design means the pen's electrically isolated from your system when it's not in use. Just point & press! It's that simple...Plug, CLOAD and RUN. And have we got the software for you to RUN with! Our demonstration tape includes a calibration program (used to adjust the CRT's brightness and contrast) plus STIK-TAC-TOE, AWARI and TOWERS. Two challanging games and a puzzle that will keep grownups and children Stik'ing it to your TRS-80 for hours. And there are instructions provided so you can begin writing your own light pen programs (lightware) for fun or profit (Level II). Or, just sit back and enjoy our LIGHT-WAVE tapes each month. Esmark's unmatched commitment to lightware can bring you up to five new games, puzzles, drills & educational quizes or simulations each month. Our current LIGHT-WAVE releases are:

LIGHT-PAK 2	—	LIGHTPEG (4 peg-jump puzzles)
		ENDRUN (Othello with a 'twist')
(LEVEL II)		LIFE9 (Conway's LIFE with mutations)
		Price: $19.95 (including postage & handling)
LIGHT-PAK 3	—	LITEGAMMON (Backgammon you'll Stik with)
(LEVEL II)		STIKWUMPUS (Caves with a little 'lite')
		MAZEMASTER (Maze after maze to poke thru)
		PRICE $19.95 (including postage & handling)

Order yours now and we'll include a free copy of FLASHBACK, Esmark's newsletter dedicated to the latest news in lightware applications. And, don't forget to tell your friends. The VIDIET-STIK can also be ordered for use on most other micro systems using the following processor chips:

8080 Z80 6800 6502

All that's required is a standard cassette jack leading to Ground and a readable single bit input port. Driver software is provided along with instructions for writing lightware applications. And tell your local Dealer that Esmark's got a Dealer package he won't want to miss out on. Delivery is 3 to 6 weeks from receipt of your order. C.O.D.'s are $3.00 extra but will be shipped within two weeks. All prices are F.O.B. Mishawaka, Indiana. Indiana residents add 4% state sales tax.

ALSO COMING FROM ESMARK:

[ ] TRS-80 Printer Interface (Cassette AUX-jack interface for all RS232 printers. Includes LLIST & LPRINT software)

[ ] TRS-80 RS232 Communications Interface (Makes your TRS-80 a full I/O terminal to timesharing systems the world over. Gives you intelligent or dumb terminal capabilities at 110 or 300 BAUD. Also includes Printer Interface above with 20 mA current loop & TTL level I/O options.)

— TRS-80 is a trademark of the Tandy Corporation —

ESMARK* INCORPORATED ✓40
507½ E. McKINLEY HWY. MISHAWAKA, IN 46544
(219) 255-3035

*ELECTRONIC SYSTEMS MARKETING

$62.95
PLUS $1.50 POSTAGE & HANDLING

✓Reader Service — see page 162

COMPLETE ASSEM
Playing "God"

```
                00100 ;
                00110 ; PLAYING GOD WITH LIFE
                00120 ; BY DENNIS BATHORY KITSZ
                00130 ; VERSION 1.9.3, 5 DECEMBER 1979
                00140 ;
                00150 ; SPECIAL THANKS TO
                00160 ; PHILIP K. HOOPER
                00170 ; CLAIRE MANFREDONIA
                00180 ;
3C00            00190 VIDEO   EQU     3C00H
5D00            00200 STORE   EQU     5D00H
                00210 ;
                00220 ; PRINT LOAD MESSAGE ON SCREEN
                00230 ;
3C00            00240         ORG     VIDEO
                00245 *LIST OFF
                00265 *LIST ON
                00270 ;
                00280 ; SAVE STACK, SET UP NEW STACK
                00290 ;
7B00            00300         ORG     7B00H
7B00 ED73FE7F   00310         LD      (7FFEH),SP
7B04 31EF7A     00320         LD      SP,7AEFH
                00330 ;
                00340 ; SET GENERATION COUNT TO 0
                00350 ;
7B07 21F27A     00360         LD      HL,7AF2H
7B0A 3600       00370         LD      (HL),0
7B0C 23         00380         INC     HL
7B0D 3600       00390         LD      (HL),0
                00400 ;
                00410 ; BLANK UPPER AND LOWER BORDERS
                00420 ;
7B0F 21C05C     00430         LD      HL,STORE-40H
7B12 0640       00440         LD      B,40H
7B14 3680       00450 BLANK   LD      (HL),80H
7B16 23         00460         INC     HL
7B17 10FB       00470         DJNZ    BLANK
7B19 210061     00480         LD      HL,STORE+400H
7B1C 0640       00490         LD      B,40H
7B1E 3680       00500 BLINK   LD      (HL),80H
7B20 23         00510         INC     HL
7B21 10FB       00520         DJNZ    BLINK
                00530 ;
                00540 ; TRANSFER VIDEO TO WORKSPACE
                00550 ; THIS ACTION PREVENTS SCREEN "HASH"
                00560 ;
7B23 21003C     00570 PHIL    LD      HL,VIDEO
7B26 11005D     00580         LD      DE,STORE
7B29 010004     00590         LD      BC,400H
7B2C EDB0       00600         LDIR
7B2E DD21005D   00610         LD      IX,STORE
                00620 ;
                00630 ; SET UP SCREEN POSITIONS TO CHECK
                00640 ;
7B32 D9         00650 LIFE    EXX
7B33 010004     00660         LD      BC,400H
7B36 D9         00670 START   EXX
                00680 ;
                00690 ; START WITH FRESH BYTE FIELD
                00700 ;
7B37 110000     00710         LD      DE,0
7B3A D5         00720         PUSH    DE
7B3B D5         00730         PUSH    DE
7B3C D5         00740         PUSH    DE
7B3D ED73FC7F   00750         LD      (7FFCH),SP
7B41 FD2AFC7F   00760         LD      IY,(7FFCH)
                00770 ;
                00780 ; START CHECK OF 20 CELL POSITIONS
                00790 ;
7B45 DDCBBF6E   00800         BIT     5,(IX-41H)
7B49 2803       00810         JR      Z,CL01
7B4B FD3405     00820         INC     (IY+5)
7B4E DDCBC066   00830 CL01    BIT     4,(IX-40H)
7B52 2806       00840         JR      Z,CL02
7B54 FD3405     00850         INC     (IY+5)
7B57 FD3404     00860         INC     (IY+4)
7B5A DDCBC06E   00870 CL02    BIT     5,(IX-40H)
7B5E 2806       00880         JR      Z,CL03
7B60 FD3405     00890         INC     (IY+5)
7B63 FD3404     00900         INC     (IY+4)
7B66 DDCBC166   00910 CL03    BIT     4,(IX-3FH)
7B6A 2803       00920         JR      Z,CL04
7B6C FD3404     00930         INC     (IY+4)
7B6F DDCBFF4E   00940 CL04    BIT     1,(IX-1)
7B73 2806       00950         JR      Z,CL05
7B75 FD3405     00960         INC     (IY+5)
7B78 FD3403     00970         INC     (IY+3)
7B7B DDCBFF5E   00980 CL05    BIT     3,(IX-1)
7B7F 2809       00990         JR      Z,CL06
7B81 FD3405     01000         INC     (IY+5)
7B84 FD3403     01010         INC     (IY+3)
7B87 FD3401     01020         INC     (IY+1)
7B8A DDCBFF6E   01030 CL06    BIT     5,(IX-1)
7B8E 2806       01040         JR      Z,CL07
7B90 FD3403     01050         INC     (IY+3)
7B93 FD3401     01060         INC     (IY+1)
7B96 DDCB0046   01070 CL07    BIT     0,(IX)
7B9A 2809       01080         JR      Z,CL08
7B9C FD3404     01090         INC     (IY+4)
7B9F FD3403     01100         INC     (IY+3)
7BA2 FD3402     01110         INC     (IY+2)
7BA5 DDCB004E   01120 CL08    BIT     1,(IX)
7BA9 2809       01130         JR      Z,CL09
7BAB FD3405     01140         INC     (IY+5)
7BAE FD3403     01150         INC     (IY+3)
7BB1 FD3402     01160         INC     (IY+2)
7BB4 DDCB0056   01170 CL09    BIT     2,(IX)
7BB8 280F       01180         JR      Z,CL10
7BBA FD3405     01190         INC     (IY+5)
7BBD FD3404     01200         INC     (IY+4)
7BC0 FD3402     01210         INC     (IY+2)
7BC3 FD3401     01220         INC     (IY+1)
7BC6 FD3400     01230         INC     (IY)
7BC9 DDCB005E   01240 CL10    BIT     3,(IX)
7BCD 280F       01250         JR      Z,CL11
7BCF FD3405     01260         INC     (IY+5)
7BD2 FD3404     01270         INC     (IY+4)
7BD5 FD3403     01280         INC     (IY+3)
7BD8 FD3401     01290         INC     (IY+1)
7BDB FD3400     01300         INC     (IY)
7BDE DDCB0066   01310 CL11    BIT     4,(IX)
7BE2 2809       01320         JR      Z,CL12
7BE4 FD3403     01330         INC     (IY+3)
7BE7 FD3402     01340         INC     (IY+2)
7BEA FD3400     01350         INC     (IY)
7BED DDCB006E   01360 CL12    BIT     5,(IX)
7BF1 2809       01370         JR      Z,CL13
7BF3 FD3403     01380         INC     (IY+3)
7BF6 FD3402     01390         INC     (IY+2)
7BF9 FD3401     01400         INC     (IY+1)
7BFC DDCB0146   01410 CL13    BIT     0,(IX+1)
7C00 2806       01420         JR      Z,CL14
7C02 FD3404     01430         INC     (IY+4)
7C05 FD3402     01440         INC     (IY+2)
7C08 DDCB0156   01450 CL14    BIT     2,(IX+1)
7C0C 2809       01460         JR      Z,CL15
7C0E FD3404     01470         INC     (IY+4)
7C11 FD3402     01480         INC     (IY+2)
7C14 FD3400     01490         INC     (IY)
7C17 DDCB0166   01500 CL15    BIT     4,(IX+1)
7C1B 2806       01510         JR      Z,CL16
7C1D FD3402     01520         INC     (IY+2)
```

Instructions for Play

Instructions for Playing "God" with Life

This listing may be entered using the Radio Shack Editor/Assembler in order to produce the Life object code. A machine with 16K memory is sufficient to hold this source listing.

After entry of this listing is complete, an object code may be produced; owners of EDTASM 1.1 will get seven FIELD OVERFLOW error messages on lines 800, 830, 870, 910, 940, 980 and 1030 indicating a negative offset for IX. However, the line will assemble correctly, and this error message may be ignored; later versions of EDTASM have corrected this flaw.

After the object code has been produced, be sure to save several copies of both it and the source code for future reference or modifications.

In order to load and run Playing "God" with Life:

1. Power-up the TRS-80, or type SYSTEM [ENTER] /0 [ENTER].
2. Respond to MEMORY SIZE? with 23700 [ENTER].
3. Insert the object tape, type SYSTEM [ENTER], and respond to the *? prompt with the name you used to assemble the object code. (I use "LIFE9").
4. If all is well, the screen will read:

```
** LOADING LIFE9 *** WAIT FOR "GOOD LOAD" *** THEN ENTER "/" **
```

5. When the tape has finished loading, the screen will display:

```
***** GOOD LOAD *****
```

6. Type a slash (/) and [ENTER].

The screen will clear, followed by the introductory text. When you have finished reading the text, you have the opportunity to call for an on-screen generation count:

```
GENERATION COUNT? ENTER 1 FOR ON-SCREEN COUNT, 0 FOR NO COUNT
```

Press 1 or 0 (ENTER not necessary), then:

```
ENTER 0 TO RETURN TO BASIC, THEN LOAD OR PROGRAM CIVILIZATIONS.
```

Press 0 [ENTER]

Now you may either:

BLY LISTING FOR with Life

```
7C20 FD3400    01530          INC     (IY)
7C23 DDCB3F4E  01540 CL16     BIT     1,(IX+3FH)
7C27 2803      01550          JR      Z,CL17
7C29 FD3401    01560          INC     (IY+1)
7C2C DDCB4046  01570 CL17     BIT     0,(IX+40H)
7C30 2806      01580          JR      Z,CL18
7C32 FD3401    01590          INC     (IY+1)
7C35 FD3400    01600          INC     (IY)
7C38 DDCB404E  01610 CL18     BIT     1,(IX+40H)
7C3C 2806      01620          JR      Z,CL19
7C3E FD3401    01630          INC     (IY+1)
7C41 FD3400    01640          INC     (IY)
7C44 DDCB4146  01650 CL19     BIT     0,(IX+41H)
7C48 2803      01660          JR      Z,CL20
7C4A FD3400    01670          INC     (IY)
7C4D DD23      01680 CL20     INC     IX
7C4F D9        01690          EXX
7C50 C33C7D    01700          JP      HOLD
               01710 ;
               01720 ; SEE IF ALL POSITIONS CHECKED
               01730 ;
```

1) Enter your own program in BASIC, or
2) Enter the STARTS program (Listing 6).

Notes on Writing Your Own Program:

1. Use POKE statements for graphics, never PRINT or PRINT@. You may POKE graphics on the video display from locations 15360 to 16383. For example, POKE 15392,191, will give a graphics block (191) a seat halfway into the top line. SET and RESET may also be used.

2. Use ASCII character 128 for a space, *not* CLS. (Listing 8).

3. The last program statement before Life must be M% = USR(0), although any variable may be used in place of M%. The correct starting address for Life has been put in place by the Life system program (see text).

Summary of using the god cursor control:

1. Press G: Mortal time is suspended and GOD → flashes on the screen.
2. Move GOD → up, down, left or right by using the four keyboard arrows; be careful if you go off the screen (see text).
3. When GOD → is pointed at a block of cells: Press B to enter the BIRTH mode, or Press K to enter the KILL mode. An asterisk (*) will appear as a prompt.
4. Press 0, 1, 2, 3, 4, or 5 to BEAR or KILL a cell. (Fig. 2.)
5. You may:

Press	B or K	plus 0 through 5 again
Move	GOD→	with the 4 arrows, or
Press	M	to return to mortal time; Life continues

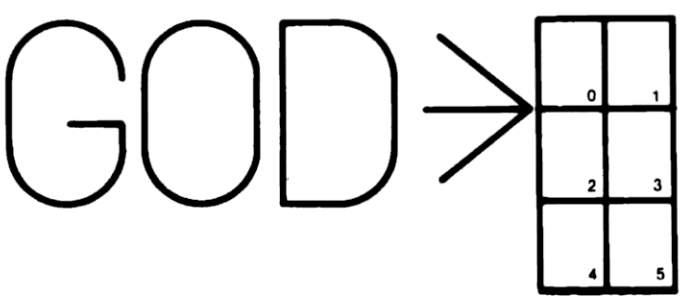


Fig.2. Note that cells 4 and 5 are below the baseline of the word.

```
7C53 0B        01740 FATSO    DEC     BC
7C54 78        01750          LD      A,B
7C55 B1        01760          OR      C
7C56 C2367B    01770          JP      NZ,START
7C59 010004    01780          LD      BC,400H
7C5C D9        01790          EXX
               01800 ;
               01810 ; MAKE GENERATIONAL CHANGES
               01820 ;
7C5D 21FF60    01830          LD      HL,STORE+3FFH
7C60 D1        01840 SCREN    POP     DE
7C61 7A        01850          LD      A,D
7C62 FE02      01860          CP      2
7C64 280A      01870          JR      Z,NXT1
7C66 FE03      01880          CP      3
7C68 2804      01890          JR      Z,$+6
7C6A CBA6      01900          RES     4,(HL)
7C6C 1802      01910          JR      $+4
7C6E CBE6      01920          SET     4,(HL)
7C70 7B        01930 NXT1     LD      A,E
7C71 FE02      01940          CP      2
7C73 280A      01950          JR      Z,NXT2
7C75 FE03      01960          CP      3
7C77 2804      01970          JR      Z,$+6
7C79 CBAE      01980          RES     5,(HL)
7C7B 1802      01990          JR      $+4
7C7D CBEE      02000          SET     5,(HL)
7C7F D1        02010 NXT2     POP     DE
7C80 7A        02020          LD      A,D
7C81 FE02      02030          CP      2
7C83 280A      02040          JR      Z,NXT3
7C85 FE03      02050          CP      3
7C87 2804      02060          JR      Z,$+6
7C89 CB96      02070          RES     2,(HL)
7C8B 1802      02080          JR      $+4
7C8D CBD6      02090          SET     2,(HL)
7C8F 7B        02100 NXT3     LD      A,E
7C90 FE02      02110          CP      2
7C92 280A      02120          JR      Z,NXT4
7C94 FE03      02130          CP      3
7C96 2804      02140          JR      Z,$+6
7C98 CB9E      02150          RES     3,(HL)
7C9A 1802      02160          JR      $+4
7C9C CBDE      02170          SET     3,(HL)
7C9E D1        02180 NXT4     POP     DE
7C9F 7A        02190          LD      A,D
7CA0 FE02      02200          CP      2
7CA2 280A      02210          JR      Z,NXT5
7CA4 FE03      02220          CP      3
7CA6 2804      02230          JR      Z,$+6
7CA8 CB86      02240          RES     0,(HL)
7CAA 1802      02250          JR      $+4
7CAC CBC6      02260          SET     0,(HL)
7CAE 7B        02270 NXT5     LD      A,E
7CAF FE02      02280          CP      2
7CB1 280A      02290          JR      Z,NXT6
7CB3 FE03      02300          CP      3
7CB5 2804      02310          JR      Z,$+6
7CB7 CB8E      02320          RES     1,(HL)
7CB9 1802      02330          JR      $+4
7CBB CBCE      02340          SET     1,(HL)
7CBD 2B        02350 NXT6     DEC     HL
7CBE D9        02360          EXX
7CBF 0B        02370          DEC     BC
7CC0 78        02380          LD      A,B
7CC1 B1        02390          OR      C
7CC2 2002      02400          JR      NZ,$+4
7CC4 1804      02410          JR      MILB
7CC6 D9        02420          EXX
7CC7 C3607C    02430          JP      SCREN
               02440 ;
               02450 ; BLANK ONE BORDER OF BITS
               02460 ; THIS PREVENTS WRAPAROUND EFFECT
               02470 ;
7CCA 060F      02480 MILB     LD      B,0FH
7CCC 114000    02490          LD      DE,40H
7CCF DD21FF5C  02500          LD      IX,5CFFH
7CD3 DDCB008E  02510 ZAAZ     RES     1,(IX)
7CD7 DDCB009E  02520          RES     3,(IX)
7CDB DDCB00AE  02530          RES     5,(IX)
7CDF DD19      02540          ADD     IX,DE
7CE1 10F0      02550          DJNZ    ZAAZ
               02560 ;
               02570 ; RESTORE VIDEO FROM WORKSPACE
               02580 ;
7CE3 21005D    02590          LD      HL,STORE
7CE6 11003C    02600          LD      DE,VIDEO
7CE9 010004    02610          LD      BC,400H
7CEC EDB0      02620          LDIR
               02630 ;
               02640 ; CHECK GENERATION COUNT STATUS FLAG
               02650 ;
7CEE 21F47A    02660          LD      HL,7AF4H
7CF1 7E        02670          LD      A,(HL)
7CF2 FE01      02680          CP      1
7CF4 C2387D    02690          JP      NZ,NOCNT
               02700 ;
               02710 ; COUNT AND CONVERT TO ASCII
               02720 ;
7CF7 0602      02730          LD      B,2
7CF9 11FF3F    02740          LD      DE,3FFFH
7CFC 21F27A    02750          LD      HL,7AF2H
7CFF 7E        02760          LD      A,(HL)
7D00 3C        02770          INC     A
7D01 27        02780          DAA
7D02 77        02790          LD      (HL),A
7D03 3007      02800          JR      NC,$+9
7D05 3F        02810          CCF
7D06 23        02820          INC     HL
7D07 7E        02830          LD      A,(HL)
7D08 3C        02840          INC     A
7D09 27        02850          DAA
7D0A 77        02860          LD      (HL),A
7D0B 2B        02870          DEC     HL
7D0C AF        02880          XOR     A
7D0D ED67      02890          RRD
7D0F C630      02900          ADD     A,30H
7D11 12        02910          LD      (DE),A
7D12 D630      02920          SUB     30H
7D14 ED67      02930          RRD
7D16 C630      02940          ADD     A,30H
7D18 1B        02950          DEC     DE
7D19 12        02960          LD      (DE),A
```

```
7D1A D638      02970          SUB     30H
7D1C ED67      02980          RRD
7D1E 1B        02990          DEC     DE
7D1F 23        03000          INC     HL
7D20 05        03010          DEC     B
7D21 20E9      03020          JR      NZ,$-15H
               03030 ;
               03040 ; CLEAR BLANKS AROUND NUMERALS TO AVOID
               03050 ; INTERACTION WITH GRAPHICS BITS
               03060 ;
7D23 21FB3F    03070          LD      HL,VIDEO+3FBH
7D26 CB8E      03080          RES     1,(HL)
7D28 CB9E      03090          RES     3,(HL)
7D2A CBAE      03100          RES     5,(HL)
7D2C 0604      03110          LD      B,4
7D2E 21BF3F    03120          LD      HL,VIDEO+3BFH
7D31 CBA6      03130 BLUNK    RES     4,(HL)
7D33 CBAE      03140          RES     5,(HL)
7D35 2B        03150          DEC     HL
7D36 10F9      03160          DJNZ    BLUNK
7D38 D9        03170 NOCNT    EXX
7D39 C3237B    03180          JP      PHIL
               03190 ;
               03200 ; KEYBOARD SCAN FOR HOLD, GOD, BASIC
               03210 ;
7D3C 210238    03220 HOLD     LD      HL,3802H
7D3F 3E01      03230          LD      A,1
7D41 BE        03240          CP      (HL)
7D42 28F8      03250          JR      Z,$-6
7D44 210638    03260          LD      HL,3806H
7D47 BE        03270          CP      (HL)
7D48 2005      03280          JR      NZ,$+7
7D4A ED7BFE7F  03290          LD      SP,(7FFEH)
7D4E C9        03300          RET
7D4F 210138    03310          LD      HL,3801H
7D52 3E80      03320          LD      A,80H
7D54 BE        03330          CP      (HL)
7D55 2807      03340          JR      Z,$+9
7D57 C3537C    03350          JP      PATSO
7D5A 23        03360 CARRY    INC     HL
7D5B 34        03370          INC     (HL)
7D5C 2B        03380          DEC     HL
7D5D C9        03390          RET
               03400 ;
               03410 ; FLASHING "GOD" SEQUENCE STARTS
               03420 ;
7D5E DD2183C   03430          LD      IX,VIDEO
7D62 DDE5      03440 GODB     PUSH    IX
7D64 E1        03450          POP     HL
7D65 11F87A    03460          LD      DE,7AF8H
7D68 010400    03470          LD      BC,4
7D6B EDB0      03480          LDIR
7D6D DD360047  03490          LD      (IX),47H
7D71 DD36014F  03500          LD      (IX+1),4FH
7D75 DD360244  03510          LD      (IX+2),44H
7D79 DD36035E  03520          LD      (IX+3),5EH
7D7D CD827D    03530          CALL    DELAY
7D80 1809      03540          JR      SCANA
               03550 ;
               03560 ; DELAY ROUTINE PLACED BEFORE ACTION
               03570 ; PRODUCES DELIBERATE FRUSTRATION
               03580 ;
7D82 21001A    03590 DELAY    LD      HL,1A00H
7D85 2B        03600          DEC     HL
7D86 7C        03610          LD      A,H
7D87 B5        03620          OR      L
7D88 20FB      03630          JR      NZ,$-3
7D8A C9        03640          RET
               03650 ;
               03660 ; SCAN FOR MOTION OF "GOD" CONTROL
               03670 ;
7D8B 214038    03680 SCANA    LD      HL,3840H
7D8E 3E08      03690          LD      A,8
7D90 BE        03700          CP      (HL)
7D91 CA827E    03710          JP      Z,UPAR
7D94 07        03720          RLCA
7D95 BE        03730          CP      (HL)
7D96 CA917E    03740          JP      Z,DNAR
7D99 07        03750          RLCA
7D9A BE        03760          CP      (HL)
7D9B CAA07E    03770          JP      Z,BCKAR
7D9E 07        03780          RLCA
7D9F BE        03790          CP      (HL)
7DA0 CA777E    03800          JP      Z,FRTAR
               03810 ;
               03820 ; SCAN KEYBOARD FOR KILL, BEAR, MORTALITY
               03830 ;
7DA3 210238    03840 EDIT     LD      HL,3802H
7DA6 3E08      03850          LD      A,8
7DA8 BE        03860          CP      (HL)
7DA9 2814      03870          JR      Z,$+16H
7DAB 2D        03880          DEC     L
7DAC 0F        03890          RRCA
7DAD BE        03900          CP      (HL)
7DAE 2813      03910          JR      Z,$+15H
7DB0 23        03920          INC     HL
7DB1 3E20      03930          LD      A,20H
7DB3 BE        03940          CP      (HL)
7DB4 CAAB7E    03950          JP      Z,HELD
7DB7 CD627E    03960          CALL    ONCE
7DBA CD827D    03970          CALL    DELAY
7DBD 18A3      03980          JR      GODB
7DBF 0600      03990          LD      B,0
7DC1 1802      04000          JR      $+4
7DC3 0601      04010          LD      B,1
7DC5 21F87A    04020          LD      HL,7AF8H
7DC8 DD7E05    04030          LD      A,(IX+5)
7DCB 77        04040          LD      (HL),A
7DCC DD36052A  04050          LD      (IX+5),2AH
               04060 ;
               04070 ; SCAN FOR BIT TO KILL OR BEAR
               04080 ;
7DD0 211038    04090 POOO     LD      HL,3810H
7DD3 3E01      04100          LD      A,1
7DD5 BE        04110          CP      (HL)
7DD6 2823      04120          JR      Z,BIT0
7DD8 07        04130          RLCA
7DD9 BE        04140          CP      (HL)
7DDA 282F      04150          JR      Z,BIT1
7DDC 07        04160          RLCA
7DDD BE        04170          CP      (HL)
7DDE 283B      04180          JR      Z,BIT2
7DE0 07        04190          RLCA
7DE1 BE        04200          CP      (HL)
7DE2 2847      04210          JR      Z,BIT3
7DE4 07        04220          RLCA
7DE5 BE        04230          CP      (HL)
7DE6 2853      04240          JR      Z,BIT4
7DE8 07        04250          RLCA
7DE9 BE        04260          CP      (HL)
7DEA 285F      04270          JR      Z,BIT5
7DEC 213802    04280          LD      HL,3802H
7DEF BE        04290          CP      (HL)
7DF0 20DE      04300          JR      NZ,POOO
7DF2 2AF87A    04310          LD      HL,(7AF8H)
7DF5 DD7505    04320          LD      (IX+5),L
7DF8 C3AB7E    04330          JP      HELD
               04340 ;
               04350 ; START ROUTINES TO KILL OR BEAR BITS
               04360 ;
7DFB AF        04370 BIT0     XOR     A
7DFC B8        04380          OR      B
7DFD 2806      04390          JR      NZ,$+8
7DFF DDCB0486  04400          RES     0,(IX+4)
7E03 1854      04410          JR      STAR
7E05 DDCB04C6  04420          SET     0,(IX+4)
7E09 184E      04430          JR      STAR
7E0B AF        04440 BIT1     XOR     A
7E0C B8        04450          OR      B
7E0D 2806      04460          JR      NZ,$+8
7E0F DDCB048E  04470          RES     1,(IX+4)
7E13 1844      04480          JR      STAR
7E15 DDCB04CE  04490          SET     1,(IX+4)
7E19 183E      04500          JR      STAR
7E1B AF        04510 BIT2     XOR     A
7E1C B8        04520          OR      B
7E1D 2806      04530          JR      NZ,$+8
7E1F DDCB0496  04540          RES     2,(IX+4)
7E23 1834      04550          JR      STAR
7E25 DDCB04D6  04560          SET     2,(IX+4)
7E29 182E      04570          JR      STAR
7E2B AF        04580 BIT3     XOR     A
7E2C B8        04590          OR      B
7E2D 2806      04600          JR      NZ,$+8
7E2F DDCB049E  04610          RES     3,(IX+4)
7E33 1824      04620          JR      STAR
7E35 DDCB04DE  04630          SET     3,(IX+4)
7E39 181E      04640          JR      STAR
7E3B AF        04650 BIT4     XOR     A
7E3C B8        04660          OR      B
7E3D 2806      04670          JR      NZ,$+8
7E3F DDCB04A6  04680          RES     4,(IX+4)
7E43 1814      04690          JR      STAR
7E45 DDCB04E6  04700          SET     4,(IX+4)
7E49 180E      04710          JR      STAR
7E4B AF        04720 BIT5     XOR     A
7E4C B8        04730          OR      B
7E4D 2806      04740          JR      NZ,$+8
7E4F DDCB04AE  04750          RES     5,(IX+4)
7E53 1804      04760          JR      STAR
7E55 DDCB04EE  04770          SET     5,(IX+4)
               04780 ;
               04790 ; ROUTINES TO DELETE STAR AND
               04800 ; RESTORE ORIGINAL IMAGE HIDDEN BY "GOD"
               04810 ;
7E59 2AF87A    04820 STAR     LD      HL,(7AF8H)
7E5C DD7505    04830          LD      (IX+5),L
7E5F C3A37D    04840          JP      EDIT
7E62 ED4BF87A  04850 ONCE     LD      BC,(7AF8H)
7E66 DD7100    04860          LD      (IX),C
7E69 DD7001    04870          LD      (IX+1),B
7E6C ED4BFA7A  04880          LD      BC,(7AFAH)
7E70 DD7102    04890          LD      (IX+2),C
7E73 DD7003    04900          LD      (IX+3),B
7E76 C9        04910          RET
               04920 ;
               04930 ; ROUTINES TO PRODUCE MOTION OF "GOD"
               04940 ;
7E77 CD627E    04950 FRTAR    CALL    ONCE
7E7A DD23      04960          INC     IX
7E7C CD827D    04970          CALL    DELAY
7E7F C3627D    04980          JP      GODB
7E82 CD627E    04990 UPAR     CALL    ONCE
7E85 0640      05000          LD      B,40H
7E87 DD2B      05010          DEC     IX
7E89 10FC      05020          DJNZ    $-2
7E8B CD827D    05030          CALL    DELAY
7E8E C3627D    05040          JP      GODB
7E91 CD627E    05050 DNAR     CALL    ONCE
7E94 0640      05060          LD      B,40H
7E96 DD23      05070          INC     IX
7E98 10FC      05080          DJNZ    $-2
7E9A CD827D    05090          CALL    DELAY
7E9D C3627D    05100          JP      GODB
7EA0 CD627E    05110 BCKAR    CALL    ONCE
7EA3 DD2B      05120          DEC     IX
7EA5 CD827D    05130          CALL    DELAY
7EA8 C3627D    05140          JP      GODB
7EAB CD627E    05150 HELD     CALL    ONCE
7EAE 31EF7A    05160          LD      SP,7AEFH
7EB1 C3237B    05170          JP      PHIL
               05180 ;
               05190 ; ROUTINES TO DISPLAY SCREEN TEXT
               05200 ; AT BEGINNING OF PROGRAM, INCLUDING
               05210 ; DELAYS, GENERATION COUNT CHOICE,
               05220 ; AND RETURN TO BASIC CONTROL
               05230 ;
6200           05240          ORG     6200H
               05250 ;
               05260 ; CLEAR SCREEN AND HOLD CLEAR
               05270 ;
6200 CD5C62    05280          CALL    PLOP
6203 0610      05290          LD      B,10H
6205 CD827D    05300 STAY1    CALL    DELAY
6208 10FB      05310          DJNZ    STAY1
               05320 ;
               05330 ; DISPLAY FIRST TWO LINES OF TEXT
               05340 ;
620A 21F762    05350          LD      HL,PLAY
620D 11153C    05360          LD      DE,VIDEO+15H
6210 011500    05370          LD      BC,15H
6213 EDB0      05380          LDIR
6215 21523C    05390          LD      HL,VIDEO+52H
6218 061B      05400          LD      B,1BH
621A 363D      05410 QLSE     LD      (HL),3DH
621C 23        05420          INC     HL
```

INFINITE BASIC

For MOD I TRS-80™ Tape and Disk Systems

Extensions to Level II and Disk BASIC $49.95

Full MATRIX Functions — 30 BASIC commands!!
Mathematical and common matrix functions. Change arrays in mid-program. Complete array handling. Tape array read and write, including strings. Common subroutine calls.

Over 50 more STRING Functions as BASIC commands!! String manipulation, translation, compression, copying, search, screen control, pointer manipulation and utility functions. Includes multikey multivariable machine language sorts. Load only machine language functions that you want! Where you want in memory! Relocating linking loader! More than you ever expected!!

∞ BUSINESS (Requires Infinite BASIC) $29.95

20 Business oriented functions including:
Printer Automatic Pagination with headers and footers!
Packed Decimal Arithmetic (+,-,*,/) 127 digits!
Binary array searches and hash code generator!

COMPROC Command Processor for Disk Systems $19.95

Auto your disk to perform any sequence of DOS commands, machine language loads, BASIC, memory size, run program, respond to input statements, etc. Single BASIC command file defines execution! Includes auto key-debounce, screen print and lower case software driver.

REMODEL + PROLOAD Specify 16, 32, or 48K Memory $34.95

RENumber any portion or all of BASIC program. MOve any portion of program from one location to another. DELete program lines. MERGE all or any portion from tape. Save and verify portion or all of combined merged programs to tape.

GSF (Specify 16, 32, or 48K) $24.95

18 Machine language routines. Includes RACET sorts.

DISK SORT MERGE 'DSM'

For MOD I and MOD II TRS-80™

FAST → Now you can sort an 85K diskette in less than 3 minutes* ← FAST

Perfect for your multi-diskette RANDOM file mailing lists, inventory, etc. Ideal for specialized report generation. Sort, merge or combination. All machine language stand-alone package — Efficient and easy to use. No separate key files required! Physical records are rearranged on diskette! Supports multiple sub records per sector including optional sector spanning. Sorts on one or more fields — ascending or descending. Sort fields within records may be character, integer, and floating-point binary. Provides optional output field deletion, rearrangement, and padding.

*Sort timings shown below are nominal times. Times will vary based on sort and system configurations. Nominal times based on Mod I 48K 4-drive configuration, 64 byte records, and 5 sort keys.

TYPE	FILE SIZE (Bytes)	SORT TIME (Sec)	TYPE	FILE SIZE (Bytes)	SORT TIME (Sec)
SORT	16K	33	SORT	340K	1081
SORT	32K	49	SORT	680K	2569
SORT	85K	173	SORT and MERGE	85K SORT + 1275K Merge	1757
SORT	170K	445			

DSM for Mod I (Minimum 32K, 2-drives) **$75 On-Disk**
DSM for Mod II (Minimum 64K, 1-drive) **$150 On-Disk**

Mod II Development Package $100
Machine Language SUPERZAP, plus Editor/Assembler and Disassembler patches.

Mod II Generalized Subroutine Facility 'GSF' $50

CHECK, VISA, M/C, C.O.D.
Calif. Residents add 6%
Telephone Orders Accepted (714) 637-5016
TRS-80 IS A REGISTERED TRADEMARK OF TANDY CORPORATION

DEALER INQUIRIES INVITED
WHEN ORDERING PLEASE
ADVISE PUBLICATION SOURCE

✓41 **RACET COMPUTES**
782 Palmdale, Orange CA 92665

EDITOR ASSEMBLER

TRS-80™ Model II

from GALACTIC SOFTWARE

EDAS 4.0 is the first user oriented Editor Assembler and was designed to utilize all the features of your Model II and TRSDOS operating system. EDAS 4.0 includes innovative features for ease of coding and debuging. EDAS 4.0 package includes complete, accurate documentation *(over 120 pages).*

only $229.00

also from Galactic . . .

MAIL/FILE — A true name, address & phone number data base management system. The most *versatile* system of its kind. Up to 2,500 records per file. **$199.00**


HOST I/O — Make full use of your Model II's communications ability. Your "BASIC" programs can now make use of the Model II's RS-232 channels, with this full-featured "KSR" system. **$199.00**

GALACTIC SOFTWARE LTD. Dept. 8A, 11520 N. Port Washington Rd., Mequon, WI 53092
✓254 (414) 241-8030


COD & Money Orders - Shipped Immediately *Check Orders - Allow two weeks.*

```
621D 10FB     05430          DJNZ    QLSE
621F 210C63   05440          LD      HL,COPY
6222 11C03C   05450          LD      DE,VIDEO+0C0H
6225 014000   05460          LD      BC,40H
6228 EDB0     05470          LDIR
              05480 ;
              05490 ; DISPLAY NEXT GROUP OF LINES WITH
              05500 ; DELAY FROM LETTER TO LETTER
              05510 ;
622A 214C63   05520          LD      HL,INSTR
622D 11403D   05530          LD      DE,VIDEO+140H
6230 06FF     05540          LD      B,0FFH
6232 CD3C62   05550          CALL    WRDS
6235 06C1     05560          LD      B,0C1H
6237 CD3C62   05570          CALL    WRDS
623A 180C     05580          JR      HERE
623C 7E       05590 WRDS     LD      A,(HL)
623D 12       05600          LD      (DE),A
623E E5       05610          PUSH    HL
623F CD027D   05620          CALL    DELAY
6242 E1       05630          POP     HL
6243 23       05640          INC     HL
6244 13       05650          INC     DE
6245 10F5     05660          DJNZ    WRDS
6247 C9       05670          RET
6248 210C65   05680 HERE     LD      HL,PLUS
624B 11403F   05690          LD      DE,VIDEO+340H
624E 06BF     05700          LD      B,0BFH
6250 CD3C62   05710          CALL    WRDS
6253 0650     05720          LD      B,50H
6255 CD027D   05730 STAY2    CALL    DELAY
6258 10FB     05740          DJNZ    STAY2
625A 180E     05750          JR      POKE
              05760 ;
              05770 ; CLEAR SCREEN SUBROUTINE
              05780 ;
625C 01FF03   05790 PLOP     LD      BC,3FFH
625F 21003C   05800          LD      HL,VIDEO
6262 11013C   05810          LD      DE,VIDEO+1
6265 3600     05820          LD      (HL),00H
6267 EDB0     05830          LDIR
6269 C9       05840          RET
              05850 ;
              05860 ; PUT "USR(0)" ADDRESS IN PLACE
              05870 ;
626A 218E40   05880 POKE     LD      HL,408EH
626D 3600     05890          LD      (HL),0
626F 23       05900          INC     HL
6270 367B     05910          LD      (HL),7BH
6272 CD5C62   05920          CALL    PLOP
              05930 ;
              05940 ; DISPLAY GENERATION COUNT PROMPT
              05950 ;
6275 21BA62   05960          LD      HL,GEN
6278 11003D   05970          LD      DE,VIDEO+100H
627B 013D00   05980          LD      BC,3DH
627E EDB0     05990          LDIR
              06000 ;
              06010 ; SCAN KEYBOARD FOR RESPONSE
              06020 ;
6280 211038   06030          LD      HL,3810H
6283 3E01     06040          LD      A,1
6285 BE       06050          CP      (HL)
6286 2806     06060          JR      Z,$+08H
6288 3C       06070          INC     A
6289 BE       06080          CP      (HL)
628A 2809     06090          JR      Z,$+0BH
628C 18F2     06100          JR      $-0CH
              06110 ;
              06120 ; SET UP GENERATION COUNT STATUS FLAG
              06130 ;
628E 21F47A   06140          LD      HL,7AF4H
6291 3600     06150          LD      (HL),0
6293 1805     06160          JR      CLOD
6295 21F47A   06170          LD      HL,7AF4H
6298 3601     06180          LD      (HL),1
              06190 ;
              06200 ; DELAY FOLLOWED BY RETURN TO BASIC
              06210 ; PROMPT AND KEYBOARD SCAN
              06220 ;
629A 0610     06230 CLOD     LD      B,10H
629C CD027D   06240 CLID     CALL    DELAY
629F 10FB     06250          DJNZ    CLID
62A1 CD5C62   06260          CALL    PLOP
62A4 21CB65   06270          LD      HL,BASC
62A7 11003D   06280          LD      DE,VIDEO+100H
62AA 013F00   06290          LD      BC,03FH
62AD EDB0     06300          LDIR
62AF 211038   06310 DOLC     LD      HL,3810H
62B2 3E01     06320          LD      A,1
62B4 BE       06330          CP      (HL)
62B5 20F8     06340          JR      NZ,DOLC
              06350 ;
              06360 ; RETURN TO BASIC CONTROL
              06370 ;
62B7 C3191A   06380          JP      1A19H
              06390 ;
              06400 ; THE LINES OF TEXT FOLLOW AS A BLOCK
              06410 ;
              06420 GEN      DEFM    'GENERATION COUNT? ENTER 1 FOR '
              06430          DEFM    'ON-SCREEN COUNT, 0 FOR NO COUNT'
              06440 PLAY     DEFM    'PLAYING GOD WITH LIFE'
              06470 INSTR    DEFM    '"PLAYING GOD WITH LIFE" IS A '
              06480          DEFM    'MATHEMATICAL PASTIME.  THERE ARE NO'
              06490          DEFM    'WINNERS OR LOSERS.  YOU BECOME '
              06500          DEFM    'THE OBSERVER IN AN AGELESS MASTER'
              06510          DEFM    'PLAN -- A SORT OF LIMITED DEITY '
              06520          DEFM    'WITH CONTROL OVER YOUR GARDEN OF'
              06530          DEFM    'EDEN, POSSESSING THE POWER TO '
              06540          DEFM    'COMMIT THE UNIVERSE TO OBLIVION OR'
              06550          DEFM    'TO CREATE OR DESTROY INDIVIDUALS '
              06560          DEFM    'AT WILL.  BUT FOR YOU TO CHANGE'
              06570          DEFM    'THE MASTER PLAN IS OUTSIDE '
              06580          DEFM    'YOUR POWER.  YOU ONLY OBSERVE AS THE'
              06590          DEFM    'GENERATIONS MARCH BY, SUSPENDING '
              06600          DEFM    'TIME TO SAVE A FEW FRIENDS.....'
              06610 PLUS     DEFM    'CONTROL WILL BE RETURNED TO YOU '
              06620          DEFM    'AND BASIC IN TWENTY SECONDS, AND'
              06630          DEFM    'IF YOU REFER TO YOUR "PLAYING GOD '
              06640          DEFM    'WITH LIFE" INSTRUCTION SHEETS,'
              06650          DEFM    'YOU WILL BE ABLE TO CREATE '
              06660          DEFM    'YOUR UNIVERSE AND ITS CIVILIZATIONS.'
              06670 BASC     DEFM    'ENTER 0 TO RETURN TO BASIC, '
              06680          DEFM    'THEN LOAD OR PROGRAM CIVILIZATIONS.'
              06690 ;
              06700 ; DISPLAY "GOOD LOAD" AT END OF LOAD
              06710 ; TO ASSURE USER OF GOOD LOAD (WHAT ELSE?)
              06720 ;
              06730          ORG     3C56H
              06740          DEFM    '***** GOOD LOAD *****'
              06750          END     6200H
```

```
DOLC   62AF        HELD   7EAB        CL18   7C38
BASC   65CB        EDIT   7DA3        CL17   7C2C
CLID   629C        FRTAR  7E77        CL16   7C23
CLOD   629A        BCKAR  7EA0        CL15   7C17
GEN    62BA        DNAR   7E91        CL14   7C08
POKE   626A        UPAR   7E82        CL13   7BFC
STAY2  6255        SCANA  7D8B        CL12   7BED
PLUS   650C        DELAY  7D82        CL11   7BDE
HERE   6248        GODB   7D62        CL10   7BC9
WRDS   623C        CARRY  7D5A        CL09   7BB4
INSTR  634C        BLUNK  7D31        CL08   7BA5
COPY   630C        NOCNT  7D38        CL07   7B96
QLSE   621A        ZAAZ   7CD3        CL06   7B8A
PLAY   62F7        MILB   7CCA        CL05   7B7B
STAY1  6205        NXT6   7CBD        CL04   7B6F
PLOP   625C        NXT5   7CAE        CL03   7B66
STAR   7E59        NXT4   7C9E        CL02   7B5A
BIT5   7E4B        NXT3   7C8F        CL01   7B4E
BIT4   7E3B        NXT2   7C7F        START  7B36
BIT3   7E2B        NXT1   7C70        LIFE   7B32
BIT2   7E1B        SCREN  7C60        PHIL   7B23
BIT1   7E0B        FATSO  7C53        BLINK  7B1E
BIT0   7DFB        HOLD   7D3C        BLANK  7B14
POOO   7DD0        CL20   7C4D        STORE  5D00
ONCE   7E62        CL19   7C44        VIDEO  3C00
```

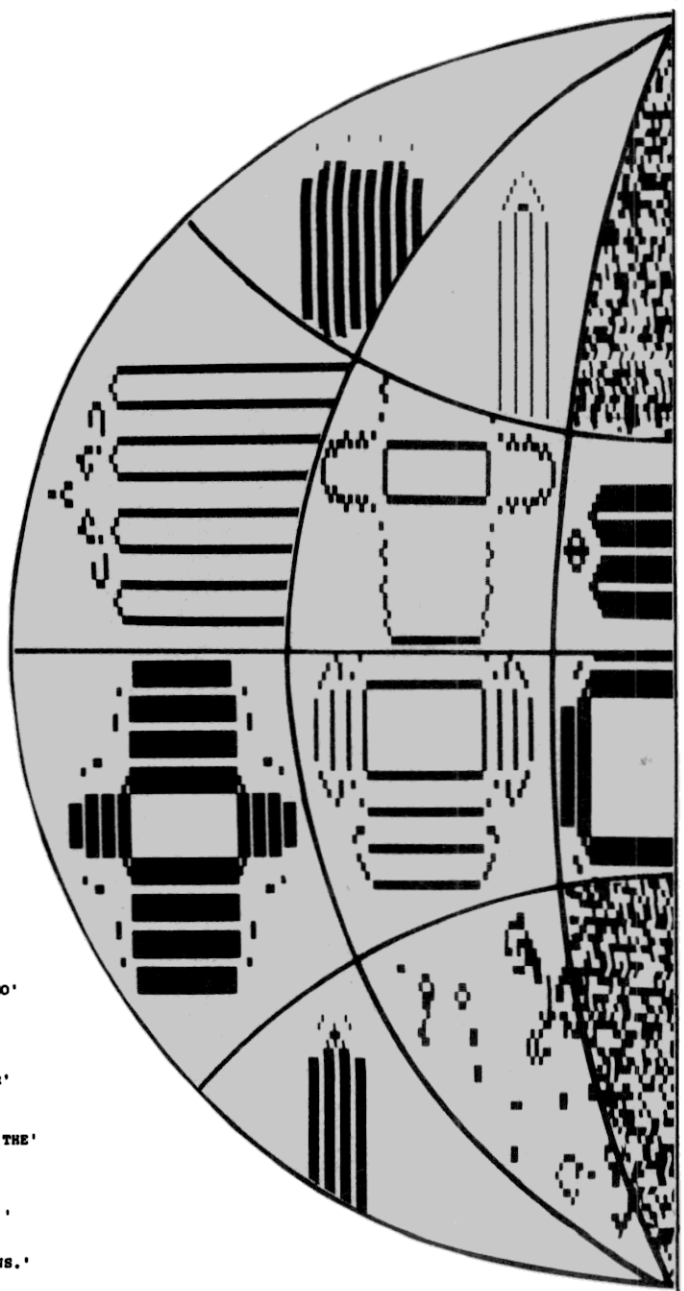

Instant Software™ New Releases



CHESSMATE-80 This versatile chess opponent gives you a choice of ten levels of play, from the "blitz" level (the computer has three seconds to choose a move) to the "infinity" level (where the computer will consider every possible move, which could take years). The program is a conservative player and follows all the accepted rules of international play.

You can let Chessmate teach you the moves. A single command has Chessmate making the move for you. Another command can let you watch Chessmate deciding on a move. It's fascinating to see the computer go through all the alternatives until it either runs out of time or finds the perfect move.

Chessmate allows you to set up the board and play end games or special problems.

Watching Chessmate play itself and seeing the computer choose the best move is a fascinating sight. It will give you an excellent insight in the methods computers use to make decisions.

Chessmate-80 plays such a good game, you might be embarrassed to play it in public. This program requires 2 TRS-80 Level I or II 16K. **Order No. 0057R $9.95.**




MONEY MADNESS These two programs will let you experience the joy and headaches of being an industrial giant.

•**Millionaire** – Can you manipulate $1000 into a million dollars in fifteen years? It all depends upon your shrewdness and strategy, as you buy and sell properties, negotiate bank loans, collect rentals and accept sealed bids.

•**Timber Baron** – This is an in-depth experience of the timber business, from the time you cut trees until your milled lumber reaches the market.

Nothing in this life is easy, and you will face the hazards of fire, rotting lumber, equipment failure, strikes and sawmill problems. With some luck you will weather it all, to sell your lumber and make a huge profit!

Money Madness is not just another game. These transactions are affected by real-life variables; those tough, unexpected emergencies which can upset the most careful plans. For the TRS-80 Level II 16K. **Order No. 0156R $9.95.**

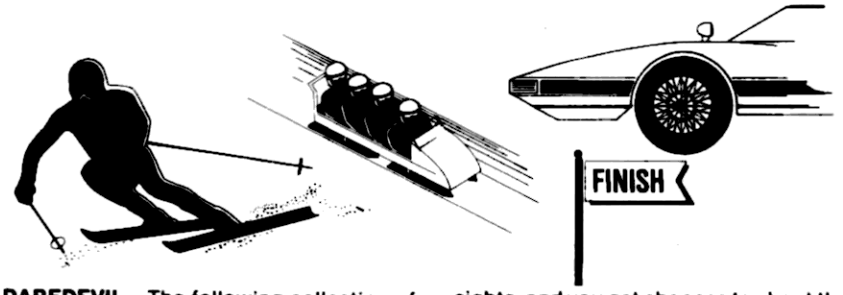

DAREDEVIL The following collection of fast-action contests will test your reactions, your reflexes and quickness-of-eye during high-speed maneuvers:

•**SKI RACER** – Hurtling down the ski-slopes, your task is to guide the skier past gates all the way down to the finish line.

•**Bob Sled** – At high speed, the challenge is to avoid taking the curves too "high", because if you do, you could go "over-the-top" and easily crash!

Indy-80 – You will need all the skill at your command, to avoid smashing into the other cars on the racetrack, and to steer clear of the curves!

•**Aero Target** – The aircraft flash by your sights, and you get chances to shoot them down.

•**Auto Race** – You attempt to steer your car past the car driven by the computer. The course is tricky, so be careful.

•**RACE** – Steering a car around this course is a real challenge, it has potholes and some very tricky curves. But that is not all, because the road becomes gradually narrower!

Don't be charmed by these innocent-looking titles. None of these contests are easy, in fact they all become very difficult, and you will be hard-pressed all the way! For the TRS-80 Level II 16K. **Order No.0082R. $9.95.**

For a free catalog listing over 200 programs write: Instant Software Catalog Dept., Peterborough, N.H. 03458

Prices subject to change without notice.

BEGINNER'S RUSSIAN The three programs in this package will give you on-screen displays of the Cyrillic letters, detailed instructions on their proper pronunciation, and exercises that will have you recognizing and speaking simple Russian words.

This package is excellent for students, businessmen, scientists, and anyone who is interested in learning the Russian language. For the TRS-80 Level II 16K. **Order No. 0136R $9.95.**



EVERYDAY RUSSIAN This program will acquaint you with the words for various foods, places to eat, signs, and the names of stores – exactly what a traveller needs to know.

You can practice typing in Russian. The program will allow you to type in letters, or words, using the complete Cyrillic alphabet. Practice writing words such as hotel names, tourist attractions, and street addresses. All you need is a TRS-80 Level II 16K. **Order No. 0137 $9.95.**

Instant Software™ Inc. ↙2

PETERBOROUGH, N.H. 03458
603-924-7296


↙Reader Service – see page 162

Instant Software™ New Releases

FOR THE TRS-80* 16K, 32K OR 48K.

PROGRAMMING POWER!

Let IRV put power in your keyboard

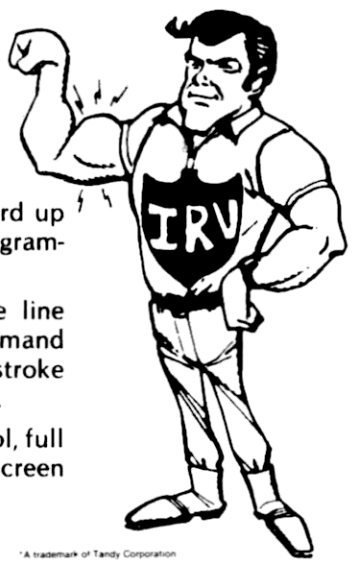

Input shorthand: programmable keyboard up to 255 characters per key plus a pre-programmed command set.

Relocate lines by simply changing the line number. Merge lines and relocate command blocks in the listing with simple one keystroke routine plus the Level II EDIT command.

Video screen editor has full cursor control, full power over anything that appears on the screen including line listings and graphics.


On cassette (DOS compatible).
Order No.0250R $24.95.

*A trademark of Tandy Corporation

YOUR CRIBBAGE AND CHECKERS PARTNER


•**Cribbage** – A popular two-person card game that nicely balances skill versus luck, attack versus defense and tactics versus strategy. This is not a tutorial program – it's a gameworthy adversary.
•**Checkers** – This is an old favorite for most of us. Whether you call it checkers or draughts, it's still the most widely known board game in existence.

Two modern classics, ready to team up with your TRS-80 and provide you with hours of challenge – the old-fashioned way. **Order No. 0068R $9.95.**



SURVEYOR'S APPRENTICE This three part package will display on-screen diagrams of rectangles, circles, triangles, parallelograms, trapezoids and polygons, giving you the formulas to compute the area for each figure, and it will give you examples of how to do the problems. The program will also quiz you and tell you how well you're doing.

These programs are a terrific supplement for any high school geometry course for work both in and out of the classroom. For the TRS-80 Level II 16K. **Order No.0127R. $9.95.**




PROGRAMMER'S CONVERTER Have you always wanted to try your hand at Z80 assembly language, but were intimidated by all of those F0's, 4B's and D02A's? Once you begin using hexadecimal numbering you'll wonder how you did without it!
This package contains these three programs:

1. **Base Calculator** – Turn your TRS-80 into a calculator which lets you convert numbers to any base from 2 through 16 **and** perform calculations in that/those base(s). Memory, sign change, one's and two's complement are all available. It will even handle fractions.
2. **Hexadecimal/Decimal Conversion Training** – A dual purpose program. First, it's a handy converter which changes decimal numbers to hexadecimal notation (and vice versa). Second, it's a teaching/testing program that gives you practice in making those conversions yourself.
3. **Number Base Conversions** – Converts any decimal, binary, octal, or hexadecimal number (up to $FFFF), to its equivalent value in the other three bases and displays all four values simultaneously.

With these aids, you'll be exploring the inner recesses of your TRS-80 Level II 16K in no time. **Order No. 0058R. $9.95.**

SKIRMISH-80 This four-part package is designed to let you leave the safety of your commonplace world and venture forth into another, more combative place and time.



•**Mission Impossible** – This program requires both skill and luck to accomplish your mission in this real-time simulation. Your objective is to drive your tank into a prison courtyard, rescue a jailed prisoner and escape. Sound easy? It's not!
•**Trap** – This is a two-player game, in which you must maneuver your opponent into a position where he is hopelessly trapped. Good luck!
•**Wipeout** – A two-player game in which your mobile gun accumulates points by destroying as many obstacles as possible on a battlefield.
•**Block-em** – A two-person competition in which your moving "snake" tries to block your opponent. You'll need a TRS-80 Level II 16K. **Order No.0070R. $9.95**

Look for Instant Software at a store near you. If the store nearest you does not stock Instant Software, use this order blank to purchase your software directly or call Toll-Free 1-800-258-5473.

Name _____

Address _____

City _____

State _____ Zip _____

☐ Check ☐ Money order

☐ VISA ☐ AMEX ☐ Master Charge

Card No. _____

Expiration Date _____

Signed _____ Date _____

Order your Instant Software today!

Quantity	Order No.	Unit Cost	Total Cost
		Handling	$1.00
		Total Order	


Instant Software Inc. Dept. 70F0
Peterborough, N.H. 03458 USA

Instant Software™ Inc.

SEE INSIDE BACK COVER FOR LIST OF DEALERS NEAR YOU.

NOBODY CAN BEAT THE MATCHLESS QUALITY/DOLLAR RATIO!

Others may charge less than Matchless, but their quality can't compare. Don't take our word for it. Ask a Matchless customer. His enthusiasm will convince you!

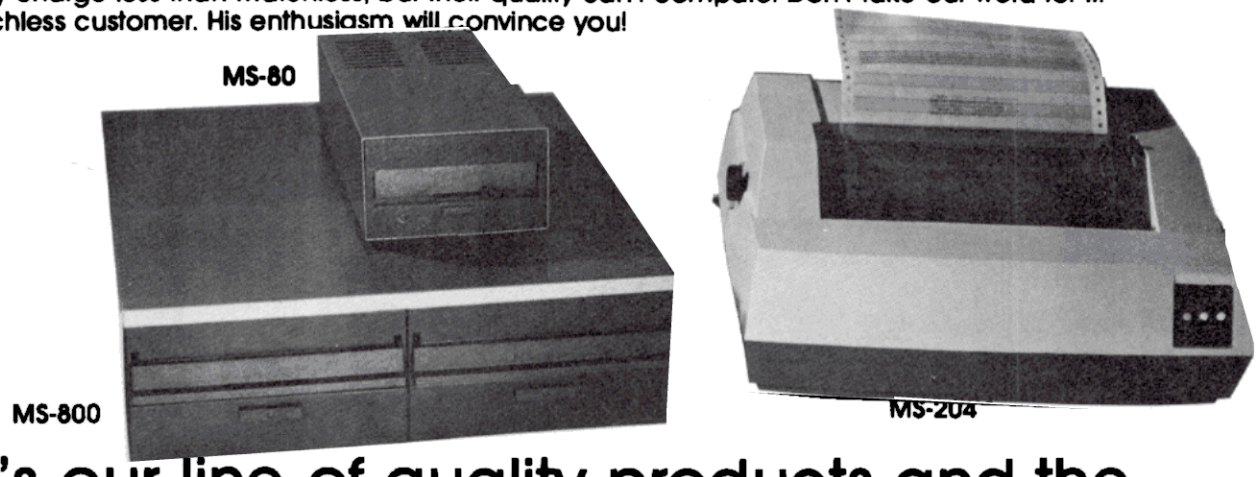

Here's our line of quality products and the systems with which they're compatible:

System	MS-80 5¼" 1-Drive	MS-800 8" 1-Drive	MS-800 8" 2-Drive	MS-204 Printer	MPI B 51 Sgl/Dbl Density	Shugart 8" Sgl/Dbl Density
TRS-80 I	$395	$1695*	$2195*	$795	$270	$500
TRS-80 II	N/A	$1095**	$1595**	$795	$270	$500
Apple II	N/A	$1645*	$2145*	$870***	$270	$500
S-100	$395	$1095**	$1595**	$795	$270	$500

* Includes hardware, software and documentation (Cables Extra $39.95)
** Includes hardware and documentation (Cables Extra $39.95)
*** Includes parallel interface with documentation.

For your convenience, order Matchless products from these Distributors/Dealers:

ARIZONA
Gold Mind Systems
2810 So. 24th St.
Phoenix, Ariz 85034
(602) 273-7732

CALIFORNIA
Hobby World
19511 Business Center Dr.
Northridge, Ca 91324
In Cal. 1-800-382-3651
Out of Cal. 1-800-423-5387

Jade Computer
13440 Hawthorne Blvd.
Lawndale, Ca 90250
(213) 973-7330

Q T Computer Systems, Inc.
15335 S. Hawthorne Blvd.
Lawndale, Ca 90250
(213) 970-0952
1-800-421-5150

INDIANA
Brookville Electronics
571 Main Street
Brookville, Ind
(317) 647-5005

MARYLAND
Radio Shack
Forrest Plaza Shopping Center
Annapolis, Maryland 21401
(301) 224-2900

NEW JERSEY
Mountain Electronics
8 Main Street
Sparta, N.J. 07871
(201) 729-5719

MATCHLESS SYSTEMS


The More-Quality-Per-Dollar People
Dealer Inquiries Welcome • TRS-80 is a Radio Shack product


18444 South Broadway Gardena, CA 90248
(213) 327-1010


✓16

1980 Matchless Systems & Market Plan

✓Reader Service—see page 162

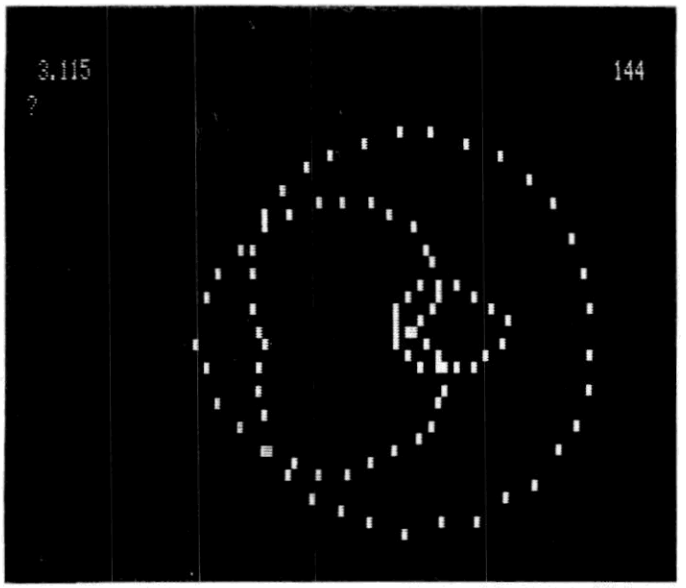

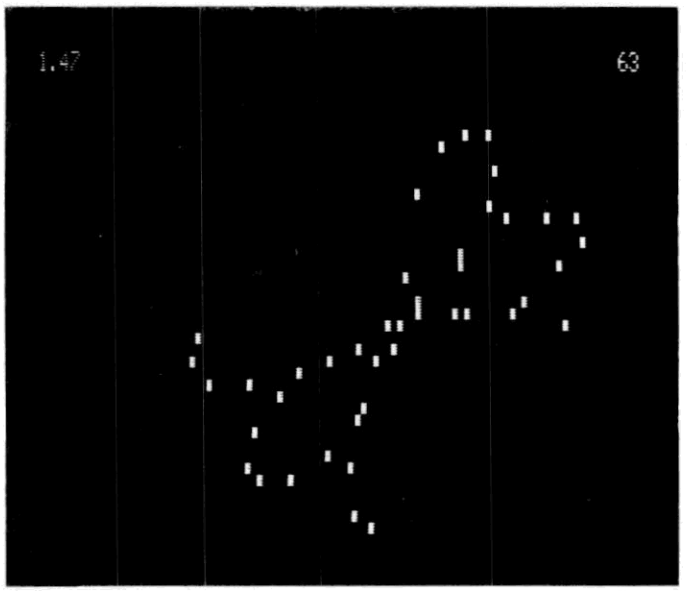

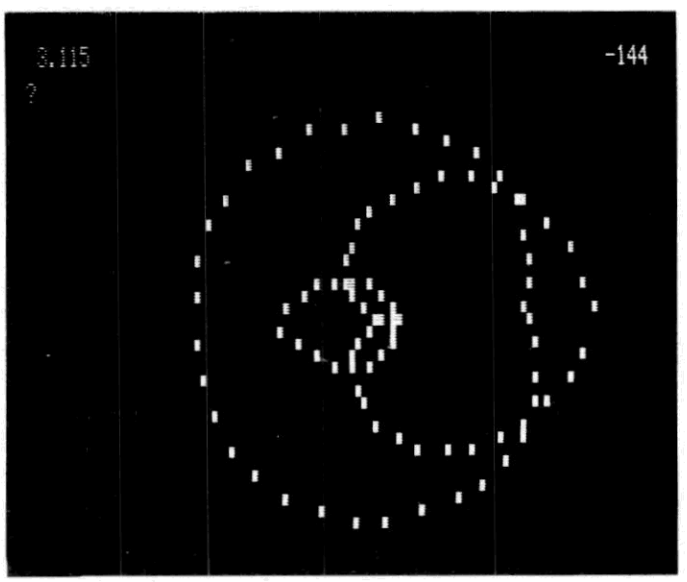

Adventures in Roseland

GENERAL

Adventures In Roseland

Allan S. Joffe W3KBM
1005 Twining Road
Dresher, PA 19025

This general equation J = a SIN X, if properly translated into a program that your TRS-80 can digest, paints a three leafed rose onto your monitor screen.

Program Listing 1 gives a programming possibility. After you have run the program and examined the scenery, the question "Why bother?" may come up.

Pattern After Pattern

For a partial answer, make the following changes and additions to Listing 1.

```
 5 G=0
15 G=G+1: PRINT [a] 50,G
30 R=35*SIN(G*J)
80 INPUT Z$
90 GOTO 10
```

You now have a program that produces pattern after pattern, because of the changing value of G, each time the program runs. Line 80 is merely a way to put in a controlled pause.

When one pattern has been generated, you may examine it for as long as you wish, hitting ENTER to get the next one.

The print statement in line 15 is an index that will help you make a record of any pattern that happens to strike your fancy.

Running the revised listing, you will see that when G is an even number, the rose has petals equal to 2*G, and when G is odd, the petal count equals G. Note also that when G is odd, the figure is first traced and then retraced by the program.

If you are going to run any number of these patterns, I suggest you alter the STEP in line 20 to read .035. This cuts the print time in half without too much damage to the image.

After you have played with the program for a bit, jump past the rose petal section by changing line 5 to read G = 29. Remember that as the patterns form, you can stop them as desired using SHIFT [A].

You will notice that some of the patterns are predominantly circular, while others are spirals. Some are cluttered looking and others quite sharply defined.

You can expand them by setting the value in line 5 to such constants as 99, 199 or 299 to find new patterns. For more visual fun with your TRS-80, set

```
10 CLS
20 FOR J=0 TO 6.28 STEP .0175
30 R=35*SIN(3*J)
40 X=(R*COS(J))*64
50 Y=(R*SIN(J))*47
60 SET(X,47-(Y/2))
70 NEXT J
```

Program Listing 1.

PRINTROL

for the TRS-80! LINE PRINTER – 1

> FIVE SELECTABLE PRINT DENSITIES
One variable, from 10/in to 22/in (approximate)
Four constant, user adjustable
> TWO WIRES TO PRINTER CIRCUIT BOARD

KIT – $59
check or money order

ASSEMBLED – $89
Pa residents, add 6%

THE HARDWARE COMPANY ✓248
5601 PENN AVE A23
PITTSBURGH, PA 15206

!TRS-80® registered trademark of the Tandy Corp.

animation!



PCTWDO (PICTURE WINDOW)

Includes machine language subroutines which allow easy creation of animations, images larger than the screen, etc.
- Images can be saved on cassette for use in other programs.
- Easily accessed from BASIC or assembler.
- Full wrap-around protected.
- Can be used for alpha-numerics.
- Includes EDTASM source, system/object code, BASIC Demo, and 5 demo animations on cassette.
- 16 page manual
- For LII 16K.

$12.00ppd

● MISOSYS ●

>disk*mod Turn your Editor Assembler into a disk package. This patch modifies EDTASM 1.1 & 1.2 under TRSDOS, NEWDOS, or VTOS! Features? Add full disk I/O, block move, global change, printer pagination with optional prompting, sorted symbol table, print memory utilization, correct DEFM expansion, protect memory, and recover after BOOT. From within the EDTASM you will have DIR, KILL, & FREE. This package is a must for assembler programmers! Priced at $20.

DISK*MOD and DSMBLR II require a 32K disk system.

>dsmblr II Complement your assembly language tools with this Z80 disassembler which produces screen, printer, or disk file output. A 2-pass process provides SYMBOLS for 16-bit address and 8-bit relative references. EQUates & ORG are generated. Priced at $20. A 16K Tape Version (DSMBLR 1.2) is available for $15.

>cmdfile Now you can append 2 or more CMD files and/or SYSTEM tapes. Perform transfer to & from disk/tape of SYSTEM/CMD modules with offset capabilities. Provides PATCH, TAPEDISK, & LMOFFSET capabilities as well as adds a few of its own. Get CMDFILE today! 16K req'd. $20.

- - - - - - - - - - - - - - - - - -

MISOSYS Department K ✓221
5904 Edgehill Drive
Alexandria, Va. 22303
703-960-2998
MASTER CHARGE & VISA Accepted

- - - - - - - - - - - - - - - - - -

A Sophisticated Model II Editor Assembler is now available. Contact MISOSYS or Galactic Software ltd.

Disk Based Word Processor $7.50

A complete word processing system for your TRS-80 including full editing features such as paragraph move, line deletion, insertion & line correction. Store text on disk, print business and personal letters, reports with numbered pages and title pages! Text stored on disk as blocks are created so texts are not limited by the available memory. The PENSA-WRITE word processor is for 16K single-drive TRS-80s and comes complete with software to produce upper/lower case at printhead, and keyboard reverse. Full right/left justification and much more. Send cheque, money order or order by phone, 24 hours, 7 days a week. Mastercharge and Visa welcome. Manual only, $1.75-deductible from cost of software.

ORDER NOW! !

PENSADYNE ✓207
COMPUTER SERVICES
4441 WEST FIRST AVE.
VANCOUVER, B.C., V6R 4H9
604-224-3107

WW I

FRANK LUKE

Is a simulation based on the exploits of American Ace Frank Luke, Jr. Hunt for observation balloons behind the front. If you survive, you get a trip to Paris (created by PCTWDO). For LII 16K.

$10.00ppd



THE UI/O 8-bit TTL/CMOS input port is the best deal around for putting your computer in contact with the world around it without tying up the cassette port or modifying the computer. Plugs into expansion card edge at back of keyboard. Full documentation, instructions, plans for joysticks . . . . Powered by inexpensive AC adapter available from Radio Shack and elsewhere.

Kit $35.00
Assembled & tested $45.00ppd

Order PCTWDO, FRANK LUKE, & UI/O from: ✓292

UNIVERSAL INTERFACE

We accept VISA & MC

P.O. BOX 1077
GLENDALE HEIGHTS, IL 60137
(312) 469-6921

(IL residents add 5¼% tax)



THE MICRO CLINIC

SYSTEM DIAGNOSTICS FOR THE MODEL I TRS-80*

THE FLOPPY DOCTOR
- **Completely** tests 35 or 40 track drives
- Tests controller functions and status bits
- Tests drive motor speed and allows adjustment
- Complete error logging for 1 to 4 drives

MEMORY DIAGNOSTIC
- Write/Read section tests each address 2560 times
- Verifies correct refresh operation and address uniqueness
- "M1 Worm" test executes machine code from each address.

Both diagnostics are written in Z-80 machine code and can be run continuously to verify long-term system reliability. Complete instruction manual includes hints to troubleshooting. Supplied on diskette for a minimum 16K single disk system.

*TRS-80 IS A REGISTERED TRADEMARK OF TANDY CORPORATION.

PRICE: $19.95 CA residents add 6% Sales Tax. Add $1.00 P/H ✓214

THE MICRO CLINIC • 17375 Brookhurst • No. 114 • Fountain Valley CA 92708

the value of G in line 5 to 29. Line 20 should read:

```
20 FOR J = 0 TO 3.14 STEP .035
```

This line eliminates some of the clutter you may have noticed in the patterns and also speeds up the printing of the image.

When G = 35 you see an image of five tangent circles. If G = 44 you have a gaggle of four circles. When G = 36 you see a stylized eagle inside a spiral segment.

We already have index G as a guide. Add another index so you can see what I see in the following examples.

Change line 30 to read:

```
30 R = 35•SIN(G•J): PRINT@0, J
```

Start the program running again by setting G in Line 5 to equal 28. The first time you run the program G will equal 29. If you stop the pattern when J = 1.12, you should see what might be interpreted as a barbell weight.

If G = 33 and J = 1.575, you may see a dinosaur.

If G = 63 and J = 1.47, you will hopefully see Snoopy the dog.

If G = 116 and J = 1.435, you will see a running dog.

Here are some other fantasies available by altering G.

G = 143, is a stylized Darth Vadar, and G = 144 gives you a close approximation of the human eye as shown in a cross section of an anatomy book.

Negative Values

You can also use negative values for G. In this last image, let G = −144. The pattern is identical except it has been rotated so that it is now the mirror image of the positive G input.

Since we are dealing with circular functions, this displacement can be left to right as in this example, or top to bottom (G = and G = −1).

You can also get a combination of shifts, such as both right to left and top to bottom, as when G = 36 or G = −36. There are times when altering the symmetry makes the image more realistic. For example, if G = 33 and J = 1.115, you see what looks like a running horse. If you alter line 30 to read,

```
30 R = 45•SIN(G•J)
```

the running horse becomes more realistic.

This program is a nice way to introduce some imaginative people to the TRS-80. It is one sure way to get rid of the comment, "Shucks, I can do that with my calculator". ■

THREE OUTSTANDING PROGRAMS

PARSECTOR V THE ULTIMATE SPACE WAR $19.95

Two opponents must navigate powerful mother ships through the galaxy and capture parsectors. Launch fleet battle craft: fyters, cruzers, and bases. Fire high powered energy beams or deadly short range weapon spreads. To win you must conquer the galaxy or destroy your opponent's mother ship.
SPECIAL FEATURES: Unique split screen gives each player a private video display. Action Sounds and Graphics: explosions, weapon releases, launches, and more. Variable galaxy size. Play another person or the computer opponent at 3 difficulty levels. LAUNCH A COMPLETE SPACE FORCE IN MINUTES !

!!! ANTS !!! A STIMULATING ACTION GAME $14.95

Two colonies of ants are at war. Opposing queen ants produce four types of offspring: workers, soldiers, guards, and drones. The challenging strategy is to produce ants in the proper sequence to sting the enemy queen or overrun it's nest.
SPECIAL FEATURES: Full screen action with SOUND. Hundreds of ants battle with machine language speed. 3 game variations. Play another person or the computer opponent at 4 difficulty levels.

NAME THAT STATE QUIZ EDUCATIONAL $14.95

A fascinating way to learn about our 50 states. It teaches the state shapes, names, capitals, populations, areas, and geographic regions. Three types of quizzes: true & false, multiple choice, and fill in the blank. SPECIAL FEATURES: Action Sounds, rewarding tones and harassment buzzers. Continuous score. Easy to use.

TRS 80 L2 16K required. For sound you must hook up an inexpensive speaker-amp system to cassette pin. ✓211
For program cassette & instructions send CHECK or MONEY ORDER.

SYNERGISTIC SOLAR INC., PO Box 560595, MIAMI FL 33156

The Playful Professor

You *know* your child would rather play games on your TRS-80 than practice math. But can you blame him? Let's face it, 'programmed learning' packages can be unspeakably dull. Until now. Med Systems presents a way for your child to *learn* mathematics and *play* a game at the same time!

The Playful Professor places your child in a 30-room mansion haunted by an intelligent ghost who holds the key to the only door out. By correctly answering problems, he moves from room to room, first to get the magic rope before the ghost captures him, and then to catch the now elusive ghost.

Options include

- Selection of problem difficulty
- Selection of problem type (+, -, ×, /, fractions)
- 1 or 2 player game
- Playing by dice roll* for rusty adults
  (*Password protectable by parent)

"TRS-80 is a registered trademark of TANDY CORP."

Med Systems Software

✓128 P.O. Box 2674, Chapel Hill, N.C. 27514

FOR TRS-80

ATTENTION INVESTORS!

COMMODITY AND STOCK

MARKET ANALYSIS

SOFTWARE


THE ANALYST
Calculates Wilder Indicators for DMI, RSI, Parabolic/Time Price Systems. Eliminates tedious calculations. **$49.**

THE OSCILLATOR
Filters historical data and locates profitable oscillators. Provides market entry/exit points. Has simulator mode. **$49.**

FOR LEVEL II 16K OR 32K DISK

- ✓ User oriented...just load program and go.
- ✓ Market tested
- ✓ Use commercial data files or make your own.
- ✓ Graphic capabilities
- ✓ Printer options
- ✓ Clear and complete documentation
- ✓ Monitor numerous markets in just minutes per day

MANAGEMENT SERVICES
2901 CLENDENEN LANE ✓213
LONGVIEW, TX 75601
TEX. RES. ADD 5% SALES TAX



— FOR 24 HOUR INFORMATION —
PHONE 408-946-1265

HOMES for TRS-80

Custom furniture for the TRS-80 office or home decor.

Featuring

- High Quality, Commercial, and Economy Models.
- Computer Consoles for $129.95, Printer Stands $39.95
- Complete TRS-80 Business System, built-in.

AVS AUDIO-VIDEO SYSTEMS 2685 AUTUMNVALE AVE. SAN JOSE, CA. 95132

✓146 *Dealer Inquiries Invited*

TRS-80 SOL-20

CASSETTE SOFTWARE

Home and Light Business Applications

These popular, professionally developed applications are low-priced. Guaranteed performance! Detailed booklet included.

• BUDGET & INVESTMENT	$17.95
• BUDGET & CHECKING	$14.95
• HOME INFO RETRIEVAL	$11.95
• MATH (ages 5 and up)	$ 7.95
• STOCK PORTFOLIO	$18.95
• AUTOMOBILE	$12.95
• MASTERMIND game	$10.95
• MONTE CARLO game	$ 7.95
• and others from	$ 4.95

Send order, or $1.00 for descriptive catalogue (free with order) to: ✓116

NEWBY SOFTWARE DEVELOPMENT CO.
299 DAWLISH AVE. TORONTO, CANADA M4N 1J6

For Canadian * Owners

Lower Case Modification .. $65.00
Cassette Load Modification . $20.00
Radio Shack Numeric Keyboard Installation $50.00
(You supply numeric pad)

RS232C Serial 1/0 Port for Printer etc. (Complete with connectors) For Use With or Without Expansion Box $169.95

For a complete catalog and credit vouchers worth $25.00 on future purchases send $5.00 to:

***All Quotes in Canadian Funds**

ORTHON COMPUTER (ORTHON HOLDINGS LTD)

✓108 12411 Stony Plain Rd., Edmonton, Alta, T5N 3N3

Scanned by Ira Goldklang - www.trs-80.com

Is your random really random?
Try this Level I program to plot a bar graph.

Randomness

Todd L. Carpenter
6660 Washington
St Louis, MO 63130

At the heart of most game programs is a statement of chance, the RANDOM statement. Having the ability to look at the shape of the RANDOM distribution, can give you the power of shaping the distribution to suit your purposes.

Graphics displays on the TRS-80 certainly have their limitations, but there is one type of display the TRS-80 handles rather nicely—the bar graph. If you are interested in the statement Y = RND(X), it is important for you to understand the distribution characteristics of Y over its range (1 to X). A bar graph can display this with a touch of elegance.

Is RANDOM Really Random

I had written a custom Star Trek program (hasn't everyone?) for my Level I, 16K machine. After playing with it for several

Program Listing.

```
100 REM  **  RANDOM DISTRIBUTION GRAPHICS PROGRAM  **
110 REM  **                                        **
120 REM  **  TODD L. CARPENTER                     **
130 REM  **  10/01/79                              **
140 REM  **                                        **
150 :
300 CLS
310 P.: P."INPUT X                FOR THE RND(X) STATEME
    NT.  IT"
320 P.    "                       MUST BE A POSITIVE NUM
    BER:"
330 P.: P."                       0  <=  RND(X)  <=  X"
340 P.A.74,"";: INPUT X
400 CLS
410 P.: P."# OF TRIALS            INPUT THE DESIRED NUMB
    ER OF TRIALS."
420 P.    "                       THE GREATER THE NUMBER
    OF TRIALS,"
430 P.    "                       THE SMOOTHER THE GRAPH
    ."
440 P.A.77,"";: INPUT C
450 CLS
460 :
470 :
500 P.A.348,"THINKING";
510 K=0: F=50
520 FOR I=0 TO 50
530   A(I)=0
540 NEXT I
550 X=INT(X)
560 IF X<=0 THEN 300
570 :
580 :
710 REM  **  CALCULATE RND(X) VALUES  **
720 REM  **  MAX VALUE STATEMENT  **
725 REM  ****************************
730          M=2*X
740 REM  ****************************
760 L=M
770 IF M<50 THEN M=50
775 IF M>50 THEN M=(INT((M-1)/50)+1)*50
780 N=M/50
790 FOR I=1 TO C
800   REM  **  RND(X) STATEMENT  **
805   REM  ************************
810            Y=RND(X)+RND(X)
820   REM  ************************
830   B=INT(Y*50/M)
840   IF B<0 THEN 870
850   A(B)=A(B)+1
860   IF K<A(B) THEN K=A(B)
870 NEXT I
880 :
890 :
1000 REM  **  PLOT X-AXIS  **
1010 CLS
1020 J=INT(K/32)+1
1030 FOR I=16 TO 123
1040   SET (I,38)
1050   IF INT(I/10)=I/10  THEN SET (I,39)
1060 NEXT I
1070 :
1080 :
1100 REM  **  LABEL X-AXIS  **
1110 FOR I=0 TO 10
1120   P.A.905+5*I,5*I*N;
1130 NEXT I
1140 :
1150 :
1200 REM  **  LABEL Y-AXIS  **
1210 FOR I=0 TO 5
1220   P.A.770-I*128,J+J*6*I;
1230 NEXT I
1240 :
1250 :
1300 REM  **  PLOT Y-AXIS  **
1310 FOR I=6 TO 38
1320   IF INT((I-2)/6)=(I-2)/6 THEN SET (15,I-1)
1330   SET (16,I): SET (17,I)
1340 NEXT I
1350 :
1360 :
1400 REM  **  HEADING AND LABELS  **
1410 P.A.29,"RANDOM DISTRIBUTION";
1420 P.A.83,"X=";X;"   ";C;"TRIALS     MAX VALUE=";L;
1430 P.A.64,"# OF TRIALS";
1440 P.A.976,"EACH BAR IS A";N;"VALUE RND(X) BIN";
1450 :
1460 :
2000 REM  **  PLOT GRAPH  **
2010 FOR I=0 TO 50
2020   IF A(I)<J THEN 2060
2030   FOR H=1 TO INT(A(I)/J)
2040     SET (20+2*I,38-H)
2050   NEXT H
2060 NEXT I
2070 :
5000 P.A.960,"";
6000 INPUT I
7000 GOTO 300
9999 REM  **  END  **
```

WITH SOUND

TING - TONG

by Ray Daly



Sound effects and fast action combine in this old favorite to provide hours of fun for one or two players. This machine language version of ping-pong has seven levels of play to make it a challenge for everyone.

Each player controls the paddles using two keys. Two players compete against each other while the single player rebounds the ball off a back wall.

Acorn produces several games for the TRS-80*. These include: *Codebreaker, Star Warp & Lunar Lander, Word Challenge. Bandito, Block'em,* and *Ting-Tong* priced at $9.95. *Pigskin, Quad* and *Star Trek Two* are available for $14.95. Ask for these and other quality Acorn programs at your local computer store.

***TRS-80 is a trademark of Tandy Corp.**

DEALER INQUIRIES INVITED.

Acorn

Software Products, Inc.

634 North Carolina Avenue,S.E.,Washington,D.C 20003

✓34

weeks, I noticed that the majority of the Klingons were always located near the center of the galaxy. Rarely did I ever find a Klingon in any of the perimeter quadrants. I thought I had used a simple Y = RND(X) statement in distributing the Klingons; but it seemed that either my RANDOM statement was not truly random or the Klingons had succeeded in outsmarting Captain Carpenter. I chose to pursue the former suspicion because, after all, the Klingons are the bad guys and they could not outsmart me—could they?

I set out to write a simple program that would show me once and for all whether or not the RANDOM statement really gave me a uniform random distribution. The purpose of the program was to display in a single picture the distribution of the RND(X) statement. The ability to see the RANDOM distribution would enable me to determine immediately the actual randomness of the statement.

I was prepared to make a shattering discovery that Radio Shack had goofed in their design of the RND(X) statement. But why had no one else discovered this biased RANDOM statement? Perhaps, I thought, the bias was slight, and I had discovered it only because my program used the RANDOM statement over 4,000 times in distributing the elements of the galaxy. As you will see, it was Captain Carpenter who had goofed, not Radio Shack.

Random Shaping

After a closer examination of my Star Trek Program I discovered that I had inadvertently used a combination of RANDOM statements. How could I test the distribution of this combination? After a few generalizations in my program I was ready to run an analysis on any combination of RANDOM statements that could start with "Y = ". I proceeded to test my Klingon distribution. Sure enough, they were doing just what I had been telling them to do, concentrating in the middle. In separate parts of the program, I had mistakenly used what amounted to the sum of two RANDOM statements and gotten a dice-like distribution. See Fig. 1.

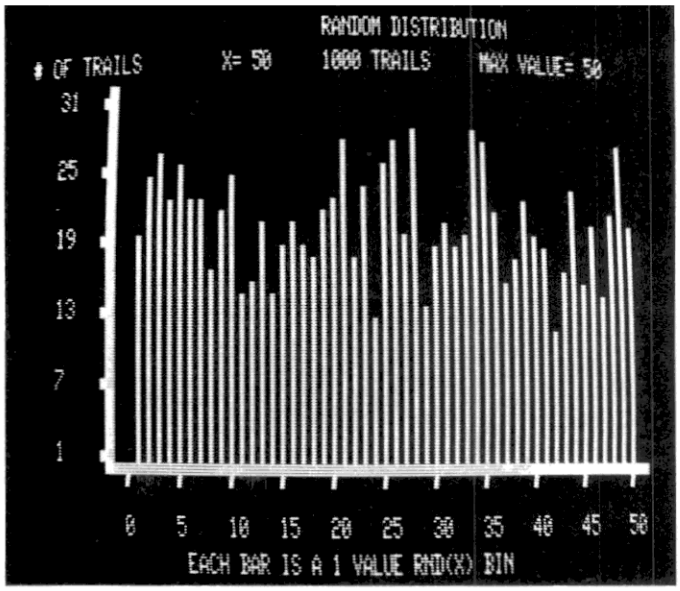


Photo 1

Photos by Yuan Chang Lo

As all craps players should know, when rolling two dice, more sevens turn up than twos or twelves. In fact, six times as many sevens turn up.

The advantage of seeing any RANDOM distribution before ENTERing it, is that the shape of a distribution can be selected to fit an application. Once you know how to generate some

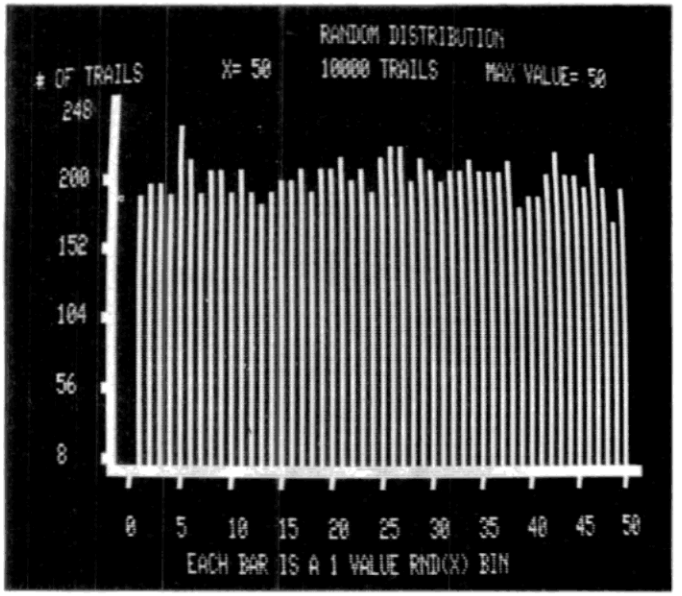


Photo 2

simple shapes, the next steps seem easier.

Program Inputs

The program (See Program Listing) starts by asking for the value of X in the RND(X) statement. It can be any number greater than zero and preferably an integer (although the machine will accept a decimal value and find the integer value itself). For the case of the simplest RANDOM statement, Y = RND(X), the function Y is uniformly distributed from 1 to X. This means that for a single trial, the probability is the same for getting any integer value from 1 to X. For example, X = 6 is analogous to the case of rolling one die. With six faces, the probability that any particular face comes up is 1/6. See Fig. 2.

Next, input the number of trials to be made. For our example this would be the number of rolls of the single die.

The greater the number of trials performed the more the graph will be delineated. The number of trials made must be large compared to the entered value of X. As a rule of thumb I make the number of trials at least 20 times the maximum

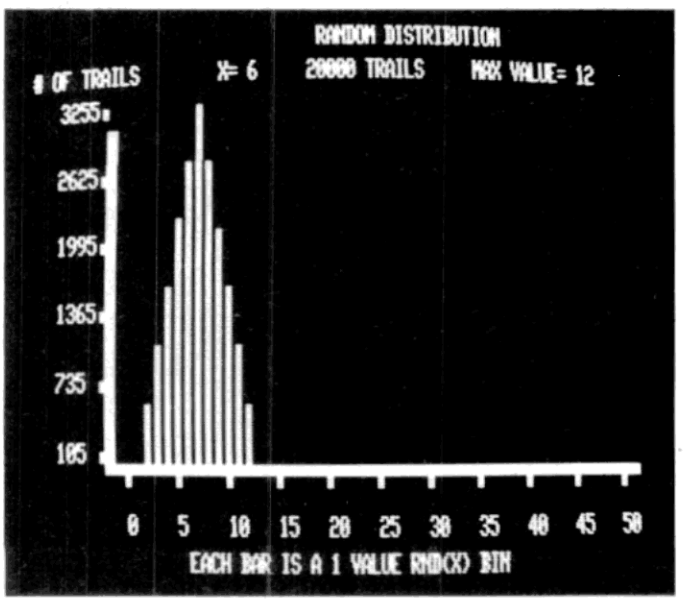


Photo 3

The Original "Photo point" Light Pen

ONLY $19.95

Why pay $30.00, $35.00, $62.00 for the same results??



SILVER & BLACK

Don't be misled by more expensive imitations!

This is the **original** *Photo point* light pen preferred and supported by some of the leading software sources like, "Quality Software"— "Instant Software"—"Level IV "products and so on.

Just imagine . . .

In playing backgammon, (included) when you want to move a man, you just point at where you want to move from, then point at where you want to move to, and your man moves!!! No more fumbling with keyboards—YEA!

Your Photo Point package comes complete;

- 1 Photo point light pen (of course)
- Info sheets on how to connect the pen and how to write your own programs ALL IN BASIC
- Two apertures
- AND two sensitivity settings
- A cassette tape with 4 informative programs and games
- Ready to connect to your TRS-80 System. **(DOS too!)**
- Does not void any Radio Shack warranties

Requirements:

- Level II basic
- And a little *imagination!!*

For fast real time programming it is your lowest cost peripheral at $19.95

Announcing

NEW PEN BASIC by Steve Bjork

Steve is one of the Best Assembly Lang. programmers around, and he has come up with PEN BASIC. This low memory routine will add 10 more commands to Level II such as PENGET which searches the entire screen for the pen and returns a number between 0-1024 in about 1 sec. Plus 9 other commands. Perfect for you lightware authors and **NEW** light pen owners too! . . . . . .only $14.95

(COUPON)

Micro Matrix ✓68
P.O. Box 938 • Pacifica, CA 94044
Send for yours **NOW: (415) 355-4635**

Name _____ Photopoint ☐ $19.95

Address _____

City _____ St._____ Pen Basic ☐ $14.95

Zip _____

Card # _____ Money Order Visa MC

Ex. Date _____ CK. ☐ ☐ ☐ ☐

✓Reader Service—see page 162

MARK GORDON COMPUTERS

DIVISION OF MARK GORDON ASSOCIATES, INC. ↙270

15 KENWOOD ST., CAMBRIDGE, MASSACHUSETTS 02139

(617) 242-2749 (617) 491-7505

COMPUTERS

Level-II 4K System	529.00
Level-II 16K System	659.00
Model-II 64K System	3499.00

DISK DRIVES

40 Track 5¼ inch drive	319.00
77 Track 5¼ inch drive	549.00
4 Disk Drive Cable	39.00

PRINTERS

Centronics 730	899.00
Centronics 779-2	999.00
Comprint 912p	599.00
Integral Data 440G	999.00
NEC 5510 w-tractor	2679.00
TI 810 Basic	1895.00

MISC HARDWARE

Expansion int. TRS-80(Ok)	249.00
Novation Cat modem	159.00
16K Memory Kit	49.00
Leedex Monitor	109.00
Printer Cable for above	49.00
ISO-2 Isolator	54.00
AC LINE FILTER	24.00

STORAGE MEDIA

Verbatim-box 10-5¼	25.00
Memorex-box 10-5¼	22.00
Plastic Storage Box	5.00

OPERATING SYSTEMS

NEWDOS by APPARAT INC	49.00
NEWDOS + by APPARAT INC	99.00
MMS FORTH DISKETTE-PRIMER	64.95

DISKETTE TRS-80*
BUSINESS SOFTWARE BY SBSG

Free enhancements and upgrades to registered owners for the cost of media and mailing. 30 day free telephone support. User reference on request.

Fully Interactive Accounting Package, General Ledger, Accounts Payable, Accounts Receivable and Payroll. Report Generating.	
Complete Package (requires 3 or 4 drives)	$475.00
Individual Modules (requires 2 or 3 drives)	$125.00
Inventory II: (requires 2 or 3 drives)	$ 99.00
Mailing List Name & Address II (requires 2 drives)	$129.00
Intelligent Terminal System ST-80 III:	$150.00
The Electric Pencil from Michael Shrayer	$150.00
File Management System:	$ 49.00


FINE PRINT

TRS-80 is a Tandy Corporation trademark. Use of above operating systems may require the use of Radio Shack TRS-DOS. Radio Shack equipment subject to the will and whim of Radio Shack.

ORDERING INFORMATION

We accept Visa and Mastercharge. We will ship C.O.D. certified check or money orders only. All orders must include 4 percent for shipping and handling. Massachusetts residents add 5 percent sales tax.

The Company cannot be liable for pictorial or typographical inaccuracies.

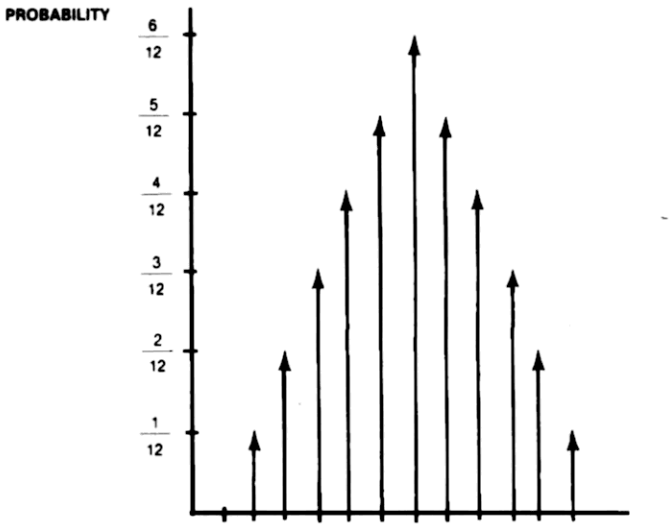

value that Y can be. In this case, make Y equal to X or 6.

You are now ready to take a peek at Photo 1 which shows a graph of the function, Y = RND(50). There were 1,000 trials, the minimum rule of thumb value, used to determine this graph. (Fifty values times 20 trial outcomes per value, equals 1,000 total trials.) As you can see it yeilds quite an uneven distribution.

I chose to use the number of trial outcomes for the vertical axis rather than probability in this case. But, either way the shape of the graph is the same.

Now consider Photo 2. I ran the same distribution, but this time with 10,000 trials. As you would expect, the average number of values per "bin" is now 10 times what it was in the previous example, or 200. I have coined the word bin to refer to each bar of the graph. A bar getting larger can be thought of as a bin being filled.

Changing the Distribution

There are two important statements in the program. They are the RANDOM statement and the MAX VALUE statement. The RANDOM statement is at line 810 and contains the expression which determines the shape of the distribution. This statement must be edited manually when-

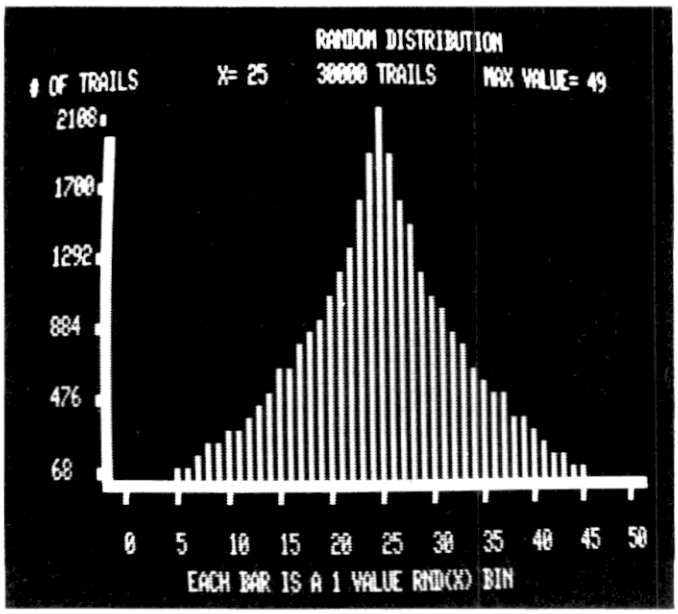


Photo 4

ever a new expression is desired. The MAX VALUE statement is at line 730, and defines the variable M which must be set equal to the largest possible value Y can be in the RANDOM statement. In the listing shown, Y = RND(X) + RND(X), so M = X + X. For instance, if line 810 reads Y = X – RND(X), line 730 would read M = X – 1. (When a term is subtracted, use its minimum value.)

Photo 3 shows the distribution of the equation in the program listing. I chose to enter X = 6, so I would be able to extend the dice rolling analogy. This time I rolled two dice and got a distribution such that the most likely number to come up, seven, was in the center. This is essentially how my Klingons were distributing themselves.

Now, we move on to some more complicated distributions. Photo 4 shows a graph of the distribution, Y = X + RND (RND(X)) – RND(RND(X)), where M = X + X – 1. This was run with 30,000 trials and quite a smooth graph was obtained. On my Level I, 16K machine, the largest number of passes allowable through a FOR-NEXT loop is 32767, so this is the largest number of trials I can enter.

Photo 5 shows a normal distribution, for those of you interested in statistics. It can be approximated by using a large sum of simple RND(X) statements. I used six terms here.

As more and more sophisticated functions are used, a definite limitation crops up. A simple statement like Y = RND(X) takes about six times as long to execute as a FOR-NEXT loop pair, and the statement Y = RND(RND(X)) takes about 10 times as long. In other words, this program can take quite a long time to run through 30,000 trials. With that in mind, it's wise to start testing a new function with the minimum rule of thumb number of trials. If Y = RND(RND(X)*2), M = X*2, and you enter X = 50, then you should enter the number of trials as 2,000 (20 times M). This will not produce a very smooth graph, but will take only about 1/15th as much time to run. Usually this is about two to three minutes.


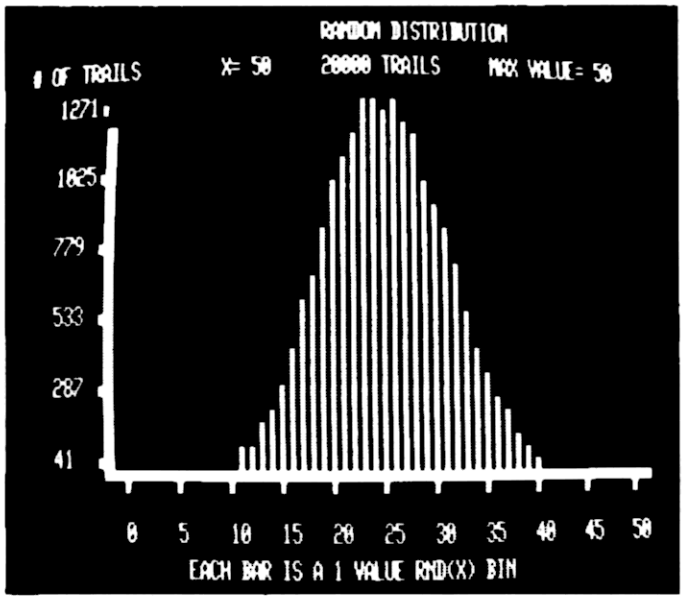


Photo 5

Auto Scaling

This brings up one last significant feature of the program. You have seen how the vertical axis scales itself depending on the maximum number of trial outcomes per bin. The same thing applies to the horizontal axis. You are not limited to a maximum value of 50. It can be 51 or 135 or 1,000 or whatever you like.

DEBUG-S/S
FOR YOUR TRS-80*



AT LAST!! A POWERFUL DEBUG MONITOR FOR THE EXPERT & NOVICE PROGRAMMERS

DEBUG-S/S is a uniquely powerful monitor for: (1) analyzing, (2) creating or modifying, and (3) debugging machine-language programs on your level II, 16K system.

EFFICIENT — SIMPLE — FUN

No longer do you need to keep reaching for your reference card or searching through your program listing while debugging your program. — Most all of this information is at your fingertips with DEBUG-S/S. Warning - Debugging your program with DEBUG-S/S is so efficient and convenient that you may find yourself wishing that you had more bugs to find.

RUN IN SLOW MOTION

With DEBUG-S/S you may run your program in slow motion or single step and observe your Z-80* registers dynamically and/or observe your message printing on the screen one-character-at-a-time!

SPLIT/SCREEN DISPLAY

DEBUG-S/S uses a convenient split screen display system. The upper right section of the screen automatically displays upon entry to DEBUG-S/S from the user's program. This section shows the user's next instruction in hexadecimal and disassembled symbolic form, and also shows the user's major Z-80* registers. The left portion of the screen is for the user's display or a scratch pad area for memory dumps. The lower right section of the screen is where DEBUG-S/S commands are entered and echoed for the user's inputs.

TRANSPARENT MODE

DEBUG-S/S may be operated in a transparent mode which leaves the entire screen showing all of the user's display data upon entry to DEBUG-S/S, except for the letter D displayed on the upper right corner of the screen indicating that DEBUG-S/S has been entered. If the user now wishes to examine his Z-80* registers, he simply types D (Display).

"NO CRASH" BREAKPOINTS

DEBUG-S/S uses a single byte breakpoint which means you may put a breakpoint in the first byte of any instruction in your program and not cause your program to crash because of the breakpoint insertion. Your breakpoint will stay active until you reset it or redefine it. This allows you to run through loops in your program repeatedly without having to redefine your breakpoint each time. You may enter any number of one byte pseudo breakpoints simultaneously in your program manually with the Memory command.

POWERFUL COMMANDS

Examples of DEBUG-S/S commands are: Jump - Go - Breakpoint - Memory examine/modify - Hex Dump - ASCII Dump - Symbolic Instruction Dump - Single Step - Automatic Step start/stop - Increase/Decrease Auto Step rate - Clear Screen and save cursor position - Clear Screen and home cursor position, plus other commands.

YOU WILL RECEIVE

You will receive a cassette and instruction manual. DEBUG-S/S is assembled into lower memory on one side of the cassette and into the top of 16K memory on the other side. DEBUG-S/S uses 4K of RAM.

*TRS-80 is a trademark of the Tandy Corporation. *Z-80 is a trademark of Zilog.

Send check or money order payable to:

CALSOFT
4421 Gilbert St. #303
Oakland, CA 94611

$39.95


California Residents add 6.5% Sales Tax.
(PRINT)

NAME _____

ADDRESS _____

CITY _____ STATE ____ ZIP ____

Reader Service — see page 162

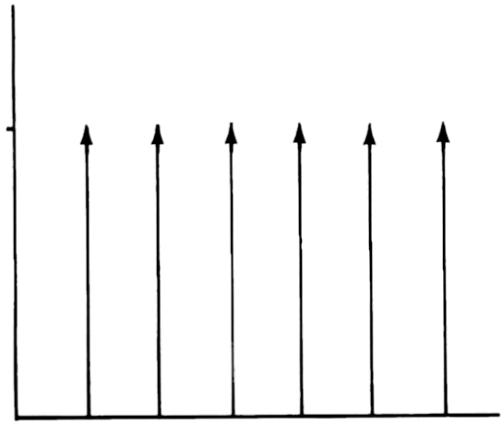

POSSIBLE ROLLS OF ONE DIE

If the graph shape is all that is desired, this can generally be accomplished with 50 as a maximum value.

If you decide that some larger number is more convenient, then the axis will be automatically scaled. There will never be more than 50 bins in which to accumulate trial points, but if the maximum value is 64, for example, the axis will be scaled down by a factor of two. This makes each bin a two-value, rather than single-value bin.

Now you have an elegantly simple program that lets you see what the RANDOM statement can do. Thanks to this program, my Klingons have been controlled, the galaxy has been saved, and Starfleet Command will not have to give me a desk job.■

!! DATA ENTRY SOLUTIONS !!

--- IN FOUR SIMPLE STEPS ---

[1] Draw the Data Entry Form on the VIDEO SCREEN
[2] Specify Checking for Each Field

Options:
- Length Check
- Y/N Check
- Numeric Type Check
- No Field Checking
- Alpha Type Check

[3] Store Data Entry Control Form on Diskette
[4] Use DATAENTR Subroutines in Application to COMPLETELY Control all Data Entry.

* BUSINESS APPLICATION ADVANTAGES *
- Standard Automatic Operator Error Prompts
- Simplified Operator Training
- Reduced Program Development Time
- Eliminate Garbage In/Garbage Out Problems

DISTRIBUTED ON DISKETTE - - - INCLUDES:
- Screen Prep. Utility
- DATAENTR Subroutines
- Sample DE Screen
- Example Program
- Complete Documentation

DE 200 MODEL I REQUIRES 32K + 1 DISK $40.00
DE 200 MODEL II REQUIRES 64K + 1 DISK $40.00

TRS-80* SOFTWARE FROM:


Johnson Associates -or- 24 Hour Order Line ✓293
P.O. Box 1402M For Bank Card Sales
Redding, CA 96099 (916) 221-0740

WRITE FOR FREE CATALOG

TRS-80* is a registered trademark of Tandy Corp

RONDURE COMPANY ✓191 2522 BUTLER ST DALLAS, TEXAS 75235 214-630-4621 the computer room

SPECIAL
Printer for your Microcomputer



GE TERMINET 300 PRINTER


Pin feed—9" paper

- 80 Print positions
- Receive only
- ASCII code
- RS-232 interface
- 30 CPS
- Upper & lowercase
- Shipping wt. 75#

Shipping containers $15.00.
(used)
(good working condition)

Will run on serial RS232 port of most micros including TRS-80. $450.00

WE HAVE FLAT-PACK ACOUSTIC



Modem pickup

$19.50


USED FANS




Muffin—8.00
Sprite—4.00



NEW POWER SUPPLY
$25.00
5V at 3 Amp
12V at 6 Amp
-12V at 3 Amp



USED POWER SUPPLY
$15.00
5V at 12 Amp
16V at 6 Amp
6V at 2 Amp




ASCII Keyboard
(used)
with enclosure
SALE $15.00

MICRO SWITCH KEYBOARD
USED BUT LOOKS VERY NICE



ASC II $40.00
(With Print)



USED OMNITEK
ORIG. ONLY
95.00

ORDERING INFORMATION:
We ship the same day we receive a certified check or money order. Texas residents add 5% sales tax. Please call if you have a question. Write for our CATALOG of many parts, terminals, printers, etc. All items subject to availability. Your money returned if we are out of stock.

SHIPPING INFORMATION:
Modems: $2.50 each; Key Boards $3.50, Power Supply $5.00. Large items & Parts: Specify Freight or Air Freight Collect. Foreign Orders: Add appropriate freight or postage. We now take Master Charge and Visa orders. Specify full number, bank number and expiration date.

PROGRAM STORE (202) 337-4691

4200 Wisconsin Ave. NW PO Box 9609 Washington D.C. 20016

Osborne & Associates Accounting Programs for TRS-80

For two years we have looked for good business accounting programs. After reviewing many over-priced or non-functioning packages, we have finally found some excellent software. And it is available at a reasonable price - $25.00 per package.

These programs are the Osborne & Associates systems, originally designed for the $30,000 Wang computer. Several C.P.A.'s at Full Service Accounting and Processing have made a few minor modifications to the programs. Now, the 48k Model 1 TRS-80 with two disk drives is a business computer!

These programs are not games. They are meant to adapt to your accounting system. You should not expect us or this software to be your accountant. But, if properly used, you will save hours of valuable business time.

All Osborne & Associates programs are fully-documented by their three extensive books - "General Ledger," "Accounts Payable & Accounts Receivalbe," and "Payroll with Cost Accounting." (These TRS-80 programs do not include the cost accounting system.) These books are available for $20 each. Please include $3.00 per book for first class shipping (otherwise sent book rate).

Act today! These are special programs at a special price.

General Ledger	-$25.00
Accounts Receivable	-$25.00
Accounts Payable	-$25.00
Payroll	-$25.00
Any book	-$20.00

Ting-Tong

by Ray Daly from Acorn

Ping-pong for the TRS-80. The game is for one or two players with eight speeds and includes sound effects. In machine language. Only 4k needed. $9.95.



Graphic Map Adventure

from Computer Simulations

These may not be a true "adventure" since they use maps, combat screens and merchant charts, but they are beyond words.

1. Dark Kingdom has four maps where your goal is to defeat the roving monsters, collect gold and silver plus enough fame to combat the evil lord in real life.
2. Lunar Encounter pits you as the protector of the moon colony against the alien force and their leader.
3. Jedi Knight requires you to seek fame and fortune starting as a lowly knight in the last days of the Republic. Struggle with the Lord Vader with your light saber.
4. Mercenary Commander has you as a soldier of Maximillian, the Mexican King. Try to keep the villages under French rule and put down the rebellion.

$14.95 each.

Adventure #9



Ghost Town

by Scott Adams from Adventure International

At long last Scott Adams has released his ninth adventure. $14.95

Galactic Revolution

by Doug Carlston

This is the third in the trilogy which started with "Galactic Empire" and then "Galactic Trader." In the time of revolution you must use diplomacy to make alliances, implement social change and fight the bureaucracy if you want to conquer the galaxy.

Sound effects and graphics including bar graphs, tables, charts and other displays make this a great game for one to three players. $14.95

Galactic Empire $14.95
Galactic Trader $14.95

Astro-Word Search

from Program Design, Inc.

Look for words imbedded horizontally, vertically or diagonally in the puzzles. Words may be backwards or forwards. Three puzzles per tape & three different tapes are available:

SPANISH $14.95 FRENCH $14.95
GEOGRAPHY $14.95

Typing Tutor

by Ainsworth & Baker from Microsoft

Before this program, we were reluctant to advertise any other typing program. But this one was worth the wait.

The program adjusts to your skill level. There are two sections. In the Tutor section you learn new keys. The program continuously adjusts to help you learn those you don't know and adds new ones as you progress. The Practice Paragraph section gives you an accuracy and words per minute rate. It tells you which keys were missed and where you were slow.

One of the most practical programs for the TRS-80. $14.95

Editor/Assembler PLUS

by Chamberlin and Yates from Microsoft

The "PLUS" in assembly language programming has arrived. If you have reached the limits of editor/assembler or were always a little awed by assembly, then Microsoft's version is for you. You not only get the features found in their Radio Shack version, but also included are the debugging features of TBUG and more. This will make your programming, editing and debugging easier, more efficient and more enjoyable.

The 80 page reference manual describes all the features. These include the macro facility, assembly directly into memory, conditional assembly, the additional expression evaluators, automatic origin, alphabetic symbol table and the quash command. Additional editor commands and the new debugger are also fully explained.

For 16k tape system $29.95

Electra Draw

from The Programmers Guild

This disk-based, graphic generating program produces lines of BASIC code for you to merge into any program. It produces low speed, full screen displays. It adds a nice touch to any program. $19.95

Disk Index

from Mumford Micro Systems

Organize your disk program library. This program reads multiple disk directories to produce an index of disk files. You can sort, search, delete, add, or print the index of filenames. You can also save it to disk. "The best thing since sliced bread" said 80-Microcomputing. Requires 32k and one disk drive. $19.95

Structured BASIC Translator

by Gene Bellinger from Acorn

Try structured programming. You can write programs using PROCEDURES, CALLS, CASE-CALLS, IF-THEN-ELSE, WHILE and UNTIL. Once written, SBT will quickly translate the structured code into an efficient BASIC program. Speeds up program development and documentation. The program is both fast (a 20k BASIC program in less than 4 minutes) and compact. Requires 32k and one disk drive. Supplied on disk for $29.95.

CREDIT CARD CALLERS MAY PHONE US 24-HOURS A DAY AT (202) 337-4691.

THE PROGRAM STORE
4200 Wisconsin Ave NW
PO Box 9609 Dept K 1
Washington, D.C. 20016

☐ please send me these TRS-80 programs:

title	price
postage:	$ 1.00
total:	

name: _____

address: _____

city, state & code _____

☐ Check payable to The Program Store
☐ MASTERCHARGE mc bank code:
☐ VISA exp date:
card number:
signature:

Forget pen and paper, use your 80 for doodling—interesting results can be saved on cassette or disk.

Doodle Bug

R. Daniel Bishop
Department of Chemistry
The School of the Ozarks
Point Lookout MO 65726

Some people are habitual doodlers. Give them a pen or pencil and, without being aware of their actions, they begin sketching or scribbling on anything that might be handy. Their addiction seems to be uncontrollable in certain locations, such as near telephones, and at specific times, such as during long business meetings or conferences. Some even doodle on napkins in restaurants! I know these things because I, too, am a compulsive doodler. Long ago I gave up all hope of ever reforming myself.

It thus should come as no surprise that one of the programs I just had to complete for my TRS-80 was Doodle, a program designed to promote uninhibited doodling using the graphics capability of the microcomputer. Furthermore, in the event that a productive sketch were to take birth during the doodle process, I derived two subroutines to permit saving the video display, either on disk or on cassette tape, and two corresponding subroutines to permit recalling the stored data and recast the video display in its entirety. Thus, a building floor plan, a circuit diagram or stylized drawings of equipment or building architecture can be stored for future redesign or viewing.

Once a design has been completed and stored, some simple program statements that employ the PRINT @ XXX, feature can be written temporarily into the redisplay subroutine. Then, when this subroutine is run, not only does the original sketch reappear on the screen, but also the alphanumeric information shows up. This new display can then be saved using the save subroutine, thus allowing complex graphics displays with accompanying labels and captions to be stored.




Fig. 1. Eight direction keys used to control development of the sketch via keyboard input.

The Program

Two sets of keys are used to provide direct keyboard control of the sketch and of the program. Fig. 1 shows the eight direction keys that are used for directing the movement of the graphics display points. With your middle finger on the G key, it is then quite natural for you to tap the T for upward movement, the H for movement to the right, the C for diagonal movement to the lower left, etc.

The program was initially designed to produce only one point each time a key was tapped. I soon decided to let the computer handle any repetitive functions, so that now each of the eight direction keys initiates a line drawn in the direction chosen. Tapping any of the other direction keys once redirects the line.

In addition to the eight direction keys, five control keys were chosen to allow program control to be initiated from the keyboard. These five control keys are listed in Table 1. Pressing the P causes the program to pause, thus halting the movement of the display point and stopping the line being generated by it.

P Pause. Halts the program until a new keyboard entry is made.
S SAVE video sketch on disk.
Z CSAVE video sketch on cassette.
G Move cursor without leaving permanent display.
L Erase current cursor position and proceed to next position (as determined by last direction key pressed).

Table 1. Five program control keys used to provide program control from the keyboard without interrupting the video display.


The S and Z keys function only when the program is in the pause mode. Thus the P key must first be pressed, followed by either S or Z. The S directs the program to the save subroutine, which saves the video display on disk. Similarly, the Z key directs the program to the save subroutine, which saves the video display on cassette. To avoid a possible mix-up between these two, which would result in an error message and destruction of the sketch on display, it is advisable to incorporate only one of these options into your program, depending on the particular storage method you wish to use.

The G and L keys function only after a direction key has been depressed. The G key will cause the pointer to move in the direction determined by the last direction key to be pressed, but it will not leave a permanent display of the points. This allows for moving the cursor to any part of the screen without leaving a trace of its passage. Several unconnected figures can be sketched using the G key to move the cursor from one figure to the next.

The L key is used to erase points that have previously been set. Erasing is accomplished as follows:

1. Use an appropriate direction key and the G control key to

*A trademark of the Tandy Corporation



Preserve — Protect — Display
your equipment with

CRYSTAL CLEAR

PLASTIC COVERS

Special offer: Buy both covers & save

- Keyboard, interface & CRT ..... $12.95 ea.
- Line Printer I ..... $12.95 ea.

Combination price $21.95
plus $1.50 postage

(Indiana residents add 4% sales tax)

Crown Plastic Co. ✓119
3746 N. College 317-925-5566
Indianapolis, IN 46225



A year ago, when nobody had ever heard of me, I said these disks could turn a TRS-80* into a serious computer.

Now they tell me I'm "the standard of the industry."

I'm Irwin Taranto, and times have changed.

In the first twelve months, almost a thousand businesses put me to the test.

You can buy my TRS-80 systems all over the country — dozens of companies sell them. Some are my dealers, some aren't. And this creates a new set of problems.

You see, learning to use a computer — any computer — is like learning anything else. It takes some getting used to. If you sit down with a computer program and the manual and try to figure it out all by yourself, you'll probably just give up and feel you've been had.

You have to hang in there for a month, make a few phone calls, and have somebody who really understands the system help you work it out.

That's why I still answer the phone. And why, I guess, people say all those nice things.

The Model I systems
So far, I have six systems for the Model I, at $99.95 each, plus $20 each for the books where required. For the Cash Journal option on the General Ledger, add another $50.

Accounts Payable
Accounts Receivable
Invoicing
General Ledger (Cash Journal optional)
Payroll
Inventory Control

And the Model II programs
Some brand new, highly-sophisticated programs for the TRS-80 Model II, at $249.95 each, plus $20 for the book where required.

General Ledger/Cash Journal
Accounts Payable/Purchase Order
Accounts Receivable/Invoicing
Payroll/Job Costing

For the Model I programs, you can tell us what you need in a letter or by phone. You get the disk and all the instructions you need. Any problems, just call me.

For the Model II programs, I ask you to fill out a questionnaire before I send you any materials. The systems have so much flexibility we tailor them to your needs.

That way, I make sure you get a system that works. If you have any doubts about that, I'll give you the names of some people in your area who've already been through the process.

Let them tell you whether I really deserve that fancy new reputation.

✓45 **Taranto**
& ASSOCIATES, INC.

P.O. Box 6073, 4136 Redwood Highway, San Rafael CA 94903
(415) 472-2760. Add $3.50 per order for handling. 6% sales tax in California only. Master Charge, Visa, C.O.D.

SPECIAL PRICE

SPECIAL PRICE

TRS-80* -I or -II MEMORY EXPANSION CHIP SET: $69!!

We've done it again . . . 8 low power, 250 ns 16K dynamic RAMs at a trend-setting price. Expands memory in TRS-80*, Apple, Heath H89, Exidy Sorcerer, newer PETs, etc. Don't be impressed with fancy packaging or four color ads; our chip set gives all the performance you want at a price you can afford. Offer good while supplies last. Add $3 for TRS-80* compatible DIP shunts and complete installation instructions.

* TRS-80 is a trademark of the Tandy Corporation.

TERMS: Cal res add tax. Allow 5% shipping, excess refunded. VISA*/Mastercharge* call our 24 hr. order desk at (415) 562-0636. COD OK with street address for UPS. Prices subject to change without notice.

WE ALSO MANUFACTURE AN EXTENSIVE LINE OF S-100 PRODUCTS; SEE COMPUPRO S-100 BOARDS IN PERSON AT FINER COMPUTER STORES WORLD-WIDE.

CompuPro™ ✓75

from GODBOUT ELECTRONICS
Bldg. 725, Oakland Airport, CA 94614

TRS-80® ***DISK FILE MESS?***

Find disk files instantly with the most sophisticated disk indexing program available. Similar Indexing programs exist but none with as many features as FINDISK-II!

AUTOMATICALLY create, sort, print, search a Master Index of all disk files.
AUTOMATICALLY read file names, disk numbers *(no hand entry)*.
AUTOMATICALLY print disk labels *(optional)*.
AUTOMATICALLY update Index from revised disks.
AUTOMATICALLY add optional file descriptions.
AUTOMATICALLY purge disks of unwanted files.

- **FINDISK-II** *(on tape or disk, 32K min)* $20.00

Other powerful programs from Documan available on tape or disk:

- **STRUCT-I** beam design and moment transfer w/graphics *(16K)* $15.00
- **SOLAR-I** essential calculations for passive solar design *(32K)* $30.00
- **RIA-I** complex analysis of real estate investments *(32K)* $30.00
- **DEPRECIATE-I** calculate, print 12 facts on depreciable items *(16K)* $10.00

✓88 **VISA OR MASTER CHARGE**

DOCUMAN SOFTWARE BOX 387-A KALAMAZOO, MI 49005 (616) 344-0805

THE GREEN SCREEN

If you spend more than a few minutes with your TRS-80® you will welcome this inexpensive accessory.

★ ★ ★ ★ ★ ★

First we made it for ourselves. Since we spend many hours with our four systems, we were looking for a way to get a better display, more like the green phosphor of our big brothers. We found that a certain optical band-pass filter gave excellent results. We were so pleased with it that we decided to make it available to others.

★ ★ ★ ★ ★ ★

The GREEN SCREEN will:

- **IMPROVE IMAGE CONTRAST**
- **REDUCE EYE FATIGUE**
- **DECREASE GLARE**
- **ENHANCE SCREEN LEGIBILITY**
- **PROVIDE A MORE PLEASING DISPLAY**
- **GIVE A DISTINCTIVE PROFESSIONAL LOOK TO YOUR SYSTEM**

The GREEN SCREEN is custom molded to fit nicely over the TRS-80® picture tube. It ingeniously mounts in seconds without any tools.

★ ★ ★ ★ ★ ★

The GREEN SCREEN:

- **Can be removed if needed**
- **Doesn't void guarantee**
- **Won't mar nor mark the unit**

We know from our own experience that you will be very pleased with your GREEN SCREEN.

TO ORDER: send $12.50 + $2 S&H to:

ALPHA ✓210 **product co.**

85-71, 79th St., Woodhaven, N.Y. 11421

Phone Orders: (212) 296-5916

BANKAMERICARD VISA

position the cursor exactly where erasing is to begin.
2. Depress the appropriate direction key that would be needed to trace over the line to be erased.
3. Immediately press the L key. Each tap of the L key moves the cursor one point along the line to be erased and erases one point on that line. Note that the direction key is pressed only once at the start of the erasing sequence.

Saving Video Displays on Disk or Cassette

The video display may be stored on disk using the subroutine containing statements numbered 300-385. This subroutine is accessed from the main program by first pressing the P pause command key, then pressing the S command key. Both alphanumeric and graphics characters are stored as eight, 255 byte strings. Thus two lines are fielded and stored at a time. Since two complete lines require 256 bytes, the last character of every other line is deleted. This, however, is a small price to pay for the simplicity of the SAVE and PRINT subroutines and the more efficient use of storage.

Storing the video display on cassette can be accomplished using the subroutine containing statements numbered 500-585. This subroutine is accessed from the main program by first pressing the P pause command key, then pressing the Z command key. Be sure that the recorder is in the Record mode *before* pressing the Z key.

As for the disk, both alphanumeric and graphics characters may be stored, although here each character code must be converted into a 4-byte string, which requires each row to be entered as a separate data string. Thus, the cassette subroutine stores 16 strings. Care must be taken to ensure that each character code fills four bytes (which includes the integer's sign); this is accomplished by adding 100 to each code. Again, for the sake of efficiency, the last two characters of each row are deleted from this routine. This is more critical than the case with the disk subroutine, and should be kept in mind when the sketch is drawn.

In order to reload your sketch from disk storage, load the program and then use the command RUN 400. Be sure that line 400 contains the appropriate file name for the particular sketch you wish to retrieve. Also before running the program, you should modify line 300, providing the name under which the new sketch will be filed. The subroutine fills in the video screen with the appropriate sketch and then transfers control to the main program, with the cursor's beginning location being the bottom right-hand corner of the screen.

Reloading the sketch from cassette storage requires the command RUN 600. The cas-

Doodlebug program.

```
1 :REM    LISTING FOR  * DOODLEBUG *
2 :REM
3 :REM    ALL PROGRAM LINES INCREMENT
4 :REM    CONTINUOUSLY BY  5  STARTING
5 :REM    AT LINE 10, ALLOWING USE OF
6 :REM    "AUTO 10,5" MODE.
7 :REM
10 CLS:CLEAR1000
15 PRINT@460,"***  DOODLE  ***"
20 PRINT@832,"BY R.D.BISHOP"
25 PRINT:PRINT"CUSTOM COMP"
30 PRINT"BOX 125, BRANSON, mo 65616"
35 FOR I=1TO999:NEXTI:CLS
36 :REM
37 :REM    INITIALIZE CURSOR POSITION
38 :REM
40 PRINT"ENTER STARTING X POSITION."
45 INPUT"(0 TO 127):";X:IFX>127ORX<0THEN45
50 PRINT"ENTER STARTING Y POSITION."
55 INPUT"(0 TO 47):";Y:IFY>47ORY<0THEN55
60 CLS:SET(X,Y)
61 :REM
62 :REM    TEST FOR KEYBOARD INPUT.
63 :REM    XI & YI DEFINE INCREMENTS FOR X AND Y.
64 :REM
65 A$=INKEY$:IF LEN(A$)=0 THEN 65
70 XI=0:YI=0
```

```
71 :REM
72 :REM     TEST FOR "PAUSE" COMMAND AND
73 :REM     "DIRECTION" COMMANDS.
74 :REM
75 IF A$="P" THEN 125
80 IF A$="H" THEN XI=+1:GOTO145
85 IF A$="F" THEN XI=-1:GOTO145
90 IF A$="T" THEN YI=-1:GOTO145
95 IF A$="B" THEN YI=+1:GOTO145
100 IF A$="R" THEN XI=-1:YI=-1:GOTO145
105 IF A$="U" THEN XI=+1:YI=-1:GOTO145
110 IF A$="N" THEN XI=+1:YI=+1:GOTO145
115 IF A$="C" THEN XI=-1:YI=+1:GOTO145
120 GOTO 65
121 :REM
122 :REM    "PAUSE" SEQUENCE TESTS FOR DISK
123 :REM     OR CASSETTE SAVE COMMANDS.
124 :REM
125 A$=INKEY$:IF LEN(A$)=0 THEN 125
130 IF A$="S" THEN 265
135 IF A$="Z" THEN 410
140 GOTO 70
141 :REM
142 :REM     INCREMENT CURSOR POSITION.
143 :REM     VERIFY THAT POSITION FITS ON SCREEN.
144 :REM
145 X=X+XI:Y=Y+YI
150 IF(X<0 OR X>127)THEN X=X-XI
155 IF(Y<0 OR Y>47) THEN Y=Y-YI
160 P=POINT(X,Y):SET(X,Y)
165 GOSUB595
166 :REM
167 :REM     TEST FOR "G" OR "L" COMMANDS AND
168 :REM     DIRECT PROGRAM TO THE CORRECT MODULE.
169 :REM
170 A$=INKEY$
175 IF LEN(A$)=0 THEN GOTO145
180 IFA$="G"THENRESET(X-XI,Y-YI):GOTO195
185 IFA$="L"THENRESET(X-XI,Y-YI):GOTO235
190 GOTO70
191 :REM
192 :REM     "G" MODULE. CURSOR CONTINUES MOVING, BUT LE
     AVES NO
193 :REM     PERMANENT MARK, UNTIL ANOTHER KEY IS PRESSE
     D.
194 :REM
195 IF P<0 THEN 200  ELSE RESET(X,Y)
200 X=X+XI:Y=Y+YI
205 IF(X<0 OR X>127)THEN X=X-XI
210 IF(Y<0 OR Y>47) THEN Y=Y-YI
215 P=POINT(X,Y)
220 SET(X,Y):GOSUB595
225 A$=INKEY$:IF LEN(A$)=0 THEN 195
230 GOTO 70
231 :REM
232 :REM     "L" MODULE.  PREVIOUS AND CURRENT CURSOR PO
     SITION
233 :REM     ERASED. IF <L> IS TAPPED, CURSOR INCREMENTS
      ONE
234 :REM     STEP AND ERASES NEW POSITION.
235 IF(X<0 OR X>127)THEN X=X-XI
240 IF(Y<0 OR Y>47) THEN Y=Y-YI
245 RESET(X,Y)
250 A$=INKEY$:IF LEN(A$)LOC`ASTOP@r50
255 IF A$="L" THEN X=X+XI:Y=Y+YI:GOTO235
260 GOTO 70
261 :REM     SUBROUTINE THAT SAVES DISPLAY ON DISK, 2 LI
     NES AT A TIME.  J INCREMENTS ONE FOR EACH CHARACTE
     R POSITION.
262 :REM     Z% RECORDS THE CHARACTER CODE WHICH IS CONV
     ERTED TO STRING DATA AND ADDED TO ZP$.
263 :REM     ZP$ ENDS UP WITH 2*(64+63)=254 BYTES. PR IS
      THE PHYSICAL RECORD NUMBER.  ZP$ IS FIELDED AS Z$
     .
264 :REM
265 CLEAR1000:OPEN"R",1,"SKETCH01"
270 FOR I=0TO15 STEP2
275 ZP$=""
280 FOR K=0TO1
285 FOR J=0 TO 63-K
290 Z%=PEEK(15360+J+64*I+64*K)
295 ZZ$=MKI$(Z%)
300 ZP$=ZP$+ZZ$
305 NEXT J
310 NEXT K
315 FIELD 1,254 AS Z$:PR=INT(I/2+.5)+1
320 GET1,PR
325 LSETZ$=ZP$
330 PUT1,PR
335 NEXTI
340 CLS:PRINT"SKETCH IS SAVED ON DISK."
345 CLOSE
350 END
351 :REM     SUBROUTINE THAT LOADS DISPLAY FROM DISK. EA
     CH OF THE 8 PHYSICAL RECORDS IS BROUGHT OUT AND DI
     SPLAYED.
352 :REM     THE LAST 3 CHARACTERS ARE DELETED TO PREVEN
     T ROLL-OVER.
353 :REM     STARTING VALUES FOR X AND Y ARE ASSIGNED. T
     HE PROGRAM IS RETURNED TO THE MAIN PROGRAM FOR KEY
     BOARD INPUT, ALLOWING ADDITIONS TO THE SKETCH.
354 :REM
355 CLEAR1000:CLS:PRINT@515,"** INSERT DISK THAT CONTAI
     NS SKETCH AND PRESS <ENTER>.  **";:INPUTZM$:CLS:OP
     EN"R",1,"SKETCH01"
```


ATTENTION SOFTWARE AUTHORS

From The Company That Brought You Adventure, by Scott Adams

We are now accepting TRS-80, Apple, and Atari software for review to manufacture under the Adventure International label. Join the fastest growing software company in the U.S. and enjoy a money paying hobby as well. Just send a machine readable copy of your program with documentation to: Adventure International, Box 3435, Longwood, Florida 32730



adventure international ✓97

TRS-80® CP/M® & CBASIC® BUSINESS SOFTWARE

LOW-COST MOD II DISK EXPANSION
. . . over 610,000 bytes/disk with our CP/M . . . plus many other features.

Find out why ours is the **Better Business Buy!**

Model II CP/M (rel. 2.0) $250.00
Model I CP/M (re. 1.5) 150.00
CBASIC 95.00

APH (Automated Patient History) 175.00
RESIDENTIAL PROPERTY ANALYSIS system 300.00
MAGIC WAND® Word Processor 400.00
RM COBOL® (Z80 code) 750.00

Osborne & Assoc. CBASIC source programs—
O&A **Payroll** w/Cost Accounting. $250.00
O&A **Accts. Rec./Accts. Payable** . . . 250.00
O&A **General Ledger** w/Cash Journal. 250.00
O&A CBASIC books for above (each) 20.00

Send 30¢ SASE for CP/M Users Group software list & free "CP/M Primer".

® MAGIC WAND is a registered trademark of Small Business Applications, Inc.
® RM COBOL is a registered trademark of Ryan-McFarland Corp.
® TRS-80 is a registered trademark of Radio Shack, a Tandy Company.
® CP/M is a registered trademark of Digital Research.
® CBASIC is a registered trademark of Software Systems.

CYBERNETICS IN C (714) 848-1922

8041 NEWMAN AVENUE • SUITE 208 • HUNTINGTON BEACH, CALIFORNIA 92647

✓Reader Service—see page 162

```
360 FOR I=1TO8
365 FIELD 1, 254 AS Z$
370 GET 1,I
375 IF I=8 THEN Z$=LEFT$(Z$,252)
380 PRINT Z$;" ";
385 NEXT I
390 X=127:Y=47
395 CLOSE
400 SET(X,Y)
405 GOTO 65
406 :REM    SUBROUTINE TO CSAVE DISPLAY ON CASSETTE.  O
     MIT THE CMD"T" AND CMD"R" COMMANDS IF A DISK-DRIVE
      IS NOT ON-LINE.
407 :REM    EACH ROW IS SAVED SEPARATELY AS A STRING OF
      CHR$ CODES. TO INSURE UNIFORM RECORD SIZE OF 4 BY
     TES, 100 IS ADDED IF THE CODE IS LESS THAN 100.
408 :REM  THE CODE IS CONVERTED TO STRING DATA AND ADDE
     D ONTO ZP$.  EACH ROW IS THEN RECORDED ON CASSETTE
     .
409 :REM
410 CLEAR 1000:CMD"T"
420 FOR I=0 TO 15
425 ZP$=""
430 FOR J=0TO62
435 Z%=PEEK(15360+J+64*I)
440 Z%=Z%+100
445 ZZ$=STR$(Z%)
450 ZP$=ZP$+ZZ$
455 NEXT J
460 PRINT#-1,ZP$
465 NEXTI
470 CLS:PRINT"YOUR SKETCH IS SAVED"
475 PRINT"ON CASSETTE AS 16 DATA ITEMS."
480 CMD"R"
485 END
490 CLEAR1000
491 :REM    SUBROUTINE THAT CLOADS VIDEO DISPLAY INFO F
     ROM CASSETTE. OMIT CMD"T" AND CMD"R" INSTRUCTIONS
     IF A DISK SYSTEM IS NOT ON-LINE.
492 :REM    EACH LINE IS READ IN AS ZP$.  ZP$ IS THEN S
     LICED INTO 4 BYTE SECTIONS, EACH BYTE CORRESPONDIN
     G TO A CHR$ CODE, Z%. 100 IS SUBTRACTED FROM EACH
     CODE AND THE RESULT IS POKED INTO THE DISPLAY.
493 :REM    THE LAST TWO COLUMNS OF THE DISPLAY DO NOT
     TRANSFER, SO THESE ARE FILLED WITH BLANKS TO ERASE
      UNWANTED CHARACTERS.  X AND Y ARE ASSIGNED STARTI
     NG VALUES AND PROGRAM RETURNS TO AWAIT INPUT.
494 :REM
495 PRINT@515,"INSERT TAPE TO LOAD DOODLE; PLAY MODE; P
     RESS <ENTER>.":INPUTZM$
500 CMD"T"
505 CLS
510 FOR I=0TO15
515 INPUT#-1,ZP$
520 ZP$="+"+ZP$
525 FOR J=0TO61
530 ZZ$=MID$(ZP$,4*J+1,4)
535 Z%=VAL(ZZ$)
540 Z%=Z%-100
545 POKE 15360+J+64*I,Z%
550 NEXTJ
555 POKE 15423+64*I,032
560 POKE 15422+64*I,032
565 NEXTI
570 POKE 15422,032:POKE 15423,032
575 X=127:Y=47
580 SET(X,Y)
585 CMD"R"
590 GOTO 65
591 :REM
592 :REM    TIME DELAY SUBROUTINE.  LENGTHEN OR SHORTEN
      AS
593 :REM    DESIRED.
594 :REM
595 FOR I=1TO40:NEXTI:RETURN
```

sette recorder must be in Play mode. Again, the subroutine transfers control to the main program, with the cursor located at the bottom right-hand corner of the screen.

It should be noted that these sets of subroutines are entirely general in nature and can be used with any type of program that generates a graphics display that you might wish to preserve for future use. The following comments relating to the program listing need to be emphasized:

1. Only one Clear 1000 instruction needs to be used for the entire program.

2. For a system that does not have a disk drive, it is not necessary to include a CMD"T" or CMD"R" instruction.

3. For applications other than *Doodle*, where it is not necessary to set new data points or change the sketch, lines 435, 445, 660 and 665 are unnecessary.

Program Modifications

You may desire to slow down the program so the lines do not develop so fast. This may be especially true if children are to be using the program. (And, believe me, are kids ever fascinated by the sketches they can generate!) Just change the timing loop in line 999, using a number larger than 40.

On the other hand, you may wish to stop the line generation function altogether, so that only one point is made each time a direction key is depressed. This is most easily accomplished by deleting line 110, changing the GOTO statements in lines 116 and 220 to GOTO 115 and GOTO 220 and changing line 215 to SET(X,Y), deleting the GOSUB999 instruction.

The direction keys chosen are those conveniently reached using the left hand. If you prefer to exercise directional control using your right hand, you may wish to change the U key to Y (line number 65). The P and L keys may be moved to the left side of the keyboard, perhaps using 1 in place of P in line 35 and 3 in place of L in lines 125 and 260.

Finally, in order to insert captions, titles, labels, etc., first complete your sketch and then determine just where each of these labels should be placed on the screen using the PRINT @ XXX, statement. Next, save the sketch on disk or cassette. Now insert your PRINT @ XXX, statements into the program between lines 430 and 450 (disk) or between lines 657 and 680 (cassette), taking care not to erase any other program lines. Now a RUN 400 or RUN 600 will display the sketch complete with titles and labels. This new sketch can be saved right over the disk or cassette recordings of the old sketch, but this time all of the alphanumeric information will be included with the sketch.

With this article, I anticipate a whole new approach to the advertising campaigns of microcomputer manufacturers: "Be the first in your neighborhood with the most elaborate, expensive and versatile doodle-pad ever invented!"■

UCSD Pascal* for TRS-80† Model II

The Standard Package: Operating System □ Compiler □ Screen Editor □ Filer □ Library □ Z-80 Assembler □ Patch Utility Program □ 280 page User Manual □ Jensen & Wirth Pascal Reference Manual □ Bowles' Beginners Guide To UCSD Pascal □ tutorial disk.

Plus:
- Single or double density diskettes in one or more standard formats.
- Disk Formatting program.
- Configuration program for serial I/O.

$350 Complete
$300 without manuals or tutorial disk

Optional Utility Programs:
- File conversion—
  CP/M‡ to Pascal $50.00
  TRSDOS† to Pascal $50.00
- Z-80 Disassembler/Dump Program $50.00

PCD SYSTEMS P. O. Box 143 • Penn Yan • New York 14527 • 315-536-3734

*Trademark of the Regents of the University of California †Trademark of Tandy Corp. ‡Trademark of Digital Research Corp.

PROFESSIONAL

BUSINESS MICRO LIBRARY



Professionally developed and field-tested business and accounting software for your *TRS-80 Model I or II from the acknowledged leader in micro-business systems.

	Model I	Model II
CBOOK/80 THE ELECTRONIC BOOKKEEPER Single-entry bookkeeping system with a chart of accounts which matches Federal Income Tax Schedule C (Profit or Loss from Business or Profession) Develops standard-format Profit & Loss Statements throughout the year and automatically produces a full Schedule C in IRS-approved format at tax-filing time.	169.95	199.95
DEPCOMP/80 DEPRECIATION COMPUTATIONS Computes depreciation of depreciable assets by any (selected) method. Prints out depreciation schedules for asset's life, or for selected years. Stores client's entire asset list and prints out his complete yearly depreciation schedule. Lists are updatable as required. A must for the busy accountant or tax practitioner.	189.95	219.95
ASSETS/80 ASSET TRANSACTIONS Accepts entry of mixed long and short term asset transactions, computes holding period from dates bought and sold, and prints out separate long-term and short-term transaction lists, ready for inclusion in Schedule D at tax time, or for determination of the client's position for any period.	189.95	219.95
LOANCOMP/80 LOAN COMPUTATIONS Computes interest and principal balance for monthly, annual, and loan total periods. Computes payments required to amortize a loan. ***Makes the "True Annual Percentage Rate" computation!*** Has a separate section which analyzes ordinary annuities with monthly, quarterly, semi-annual, and annual payments. For any of the above, prints out summarizing statements or your choice of three types of amortization schedules. We recommend this program to anyone in the accounting professions or concerned in any way with financing.	67.95	97.95
STATEMENT/80 PREPARES ITEMIZED STATEMENTS of any desired form (Profit & Loss, Rental Income, etc.) and prints out the form, with computations made automatically.	37.95	47.95
FORMLET/80 FOR PREPARING FORM LETTERS from a selection of pre-written and stored stock paragraphs. Will store up to ten of such letters on disk and allow you to select among them at will. You may intermix fresh text, of course.	47.95	57.95
TYP/PRT/80 SMALL BUT MIGHTY Not only permits use of the printer as a typewriter but will allow you to retain any display already on the video, make notes from it, or actually copy it on the printer automatically. This program will run concurrently with another program you may be using and you can go from one to the other at will. Also contains a calculator. So useful it is hard to describe here.	17.95	24.95

★ ★ ★ ★ ★ **FOR DISK BASED SYSTEMS ONLY** ★ ★ ★ ★ ★

Write on letterhead, or call, for free brochure and sample outputs.

*TRS-80 is a registered trademark of Tandy Corporation

CONTRACT SERVICES ASSOCIATES ↙10

706 SOUTH EUCLID **ANAHEIM, CA 92802**

TELEPHONE (714) 635-4055

★ ★ ★ **20 YEARS OF SERVICE** ★ ★ ★

A computerized kaleidoscope for your Level II 16K.

Kaleidopen

Robert F. Nicholas
2-B Lennox Heights
Lennox, MA 01240

Remember kaleidoscopes? Those little cardboard tubes filled with brightly colored shapes and mirrors? How we stared into them, twisting them around to create dazzling designs!

Kaleidoscopic designs can be fascinating, and they make great patterns for painting, needlepoint, fabrics and other crafts projects.

You've probably seen a kaleidoscope program running on a computer, and you've undoubtedly wished that you could create some of those patterns yourself. Why should the computer have all the fun? Well now you can jump right in there and explore your creative potential.

How It Works

Before you begin drawing, you need to understand how the program works. As you can see from Fig. 1, your video screen is split into four quadrants. As you draw in the upper left-hand quadrant, the computer creates mirror images of your design in the other three.

Points in quadrant I are defined as (X,Y) and are printed by using the SET command. Remember that your screen is 128 (0 to 127) by 48 (0 to 47). Therefore, points in quadrant II must be defined as (127-X,Y) in order to produce a mirror image to the right.

Similarly, quadrant III uses




Fig. 1.

(X,47-Y) to produce a mirror image looking down. And in quadrant IV, (127-X,47-Y) creates a mirror image looking down and to the right. The total effect is of a kaleidoscopic pattern centered on the screen.

Running Kaleidopen you are asked to specify the starting coordinate for your design. Enter the X (0 to 63) and Y (0 to 23) coordinate as a pair separated by a comma. For example, try 20,10. This is the only time you will use the ENTER key while drawing. For the rest of the commands, simply press the key you desire.

Fig. 2 shows the eight directions used in the program. Just press any key (one-eight) and when the line has reached the location you want, press the S key to stop it. Then press the number of the next direction you want. Continue until your design is finished.

Notice that you are only drawing in quadrant I, but that the computer is simultaneously drawing the appropriate mirror images in the other three quadrants. Always remember that your directions refer to quadrant I only!

Suppose You Make a Mistake

Now we all make mistakes once in awhile. If you make an error, just press B to clear the board and begin a new pattern from scratch. If, on the other hand, it is just a case of having drawn a line too long, use the E key to erase.

Suppose I drew a line in direction four, but failed to stop in time. I simply press E to erase, followed by eight. I erase in direction eight because, as you can see from Fig. 2, eight is the direction opposite four. If I drew in direction one, I would have to erase in direction five.

You can also use the E key to skip to a new position on the screen without leaving a trace. For instance, pressing E-three moves the point up without drawing a line. Pressing S stops at a new position.

The only problem is that you may pass over a line you wanted. The result is an erasure at that point. The trick is to move up to the line in the E mode, stop, draw one point and then go back into the E mode again to keep moving without leaving a trace. It takes a little practice, but really isn't that difficult.

If you are feeling ambitious, you can build a move command

```
420 INPUT"ENTER STARTING COORDINATES X (0-127),Y (0-47)";X,Y
440 IF (X<0 OR X>127) OR (Y<0 OR Y>47) THEN 420
1100 IF X+R<0 OR X+R>127 OR Y+U<0 OR Y+U>47 THEN 460
```

Example 1.




Fig. 2.

(M) that moves without leaving a trace and does not erase anything already on the screen. (Hint: Use the POINT (X,Y) command.)

So what do you do with your masterpiece once you've completed it? Why save it on tape of course! That way you can recall your best creations for use in projects or for putting on your own one man art show.

Put a blank tape into your recorder, position it, note its location, be sure your cables are all connected and depress both the play and record buttons. Now press the P key to save your design on tape.

The entire process takes about 80 seconds. The screen clears when the process is completed and you will be told that the picture has been saved.


If you wish to recall a picture from tape, respond yes when you are asked. Rewind the tape to the correct position, plug in the cables, depress the play button and hit ENTER. Your picture prints on the screen in 45 seconds.

And that's all there is to it! The program includes a brief summary of the drawing commands to refresh your memory. So limber up your fingers and begin creating with KALEID-

FROM PROGRAMMA
HI-RESOLUTION GRAPHICS FOR THE TRS-80®




LOWER CASE
The 80-GRAFIX board includes two sets of lower case characters at no additional cost.

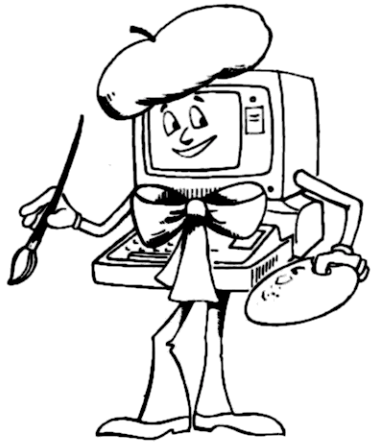



INVERSE VIDEO
The 80-GRAFIX board allows you to do inverse video to high-light your screen displays.




DEMONSTRATION PROGRAMS
The 80-GRAFIX board is supplied with a Character Generator software and several demonstration programs.

FINALLY, AT LAST. . .


HI- RESOLUTION GRAPHICS is available for your TRS-80 computer system. The 80-GRAFIX board from PROGRAMMA International, Inc. gives your TRS-80 high resolution capability that is greater than the Commodore CBM/PET or even the revered APPLE II.

80-GRAFIX gives the TRS-80 an effective screen of 384X192 pixels, versus the normal 127X192 for the TRS-80, 80X50 for the CBM/PET, or the 280X192 of an APPLE II. As an added feature, 80-GRAFIX offers you lower case characters at no additional cost. Of course, you can also create your own set of up to 64 original characters using the supplied Character Generator software.


The 80-GRAFIX board is simple to install (note that this voids your Radio Shack warranty), and programming is done through BASIC. 80-GRAFIX opens up a whole new realm of software development and excitement never dreamed of for the TRS-80!



CHARACTER GENERATOR
The supplied character generator software allows you to create your own character set of up to 64 original characters.




REAL-TIME GRAPHIC GAMES
With the 80-GRAFIX board you can write exciting real-time games using BASIC.




EASY INSTALLATION
The 80-GRAFIX board is simple to install and fits inside the TRS-80 case.



GRAPHICS GALORE
The 80-GRAFIX board and the supplied Character Generator allow you to become an artist.



ELECTRONIC DESIGN
The 80-GRAFIX board has unlimited application in Electronic design and Education.



80-GRAFIX HI-RESOLUTION
Finally, the only means to protect your computer investment is to order an 80-GRAFIX board TODAY!



EXCITEMENT & FUN
Open up a new realm of software development with the 80-GRAFIX board.

Available exclusively through PROGRAMMA at the cost of $149.95
Please check with us for availability prior to ordering
VISA and MASTERCHARGE accepted
TRS-80 is a registered trademark of the Tandy Corp.

PROGRAMMA INTERNATIONAL, INC.
3400 Wilshire Blvd.
Los Angeles, CA 90010
(213) 384-0579 • 384-1116 • 384-1117

OPEN.

Modifications

You can modify the program to produce only one mirror image (bilateral symmetry?) by deleting lines 1200, 1210, 1260 and 1270. Also change lines 420, 440 and 1100 as indicated in Example 1.

To create one large drawing board (the entire screen), delete lines 1190, 1200, 1210, 1250, 1260 and 1270 and change lines 420, 440 and 1100 as indicated in Example 2. ■

```
420 INPUT"ENTER STARTING COORDINATES X (0-63),Y (0-47)";X,Y
440 IF (X<0 OR X>63) OR (Y<0 OR Y>47) THEN 420
1100 IF X+R<0 OR X+R>63 OR Y+U<0 OR Y+U>47 THEN 460
```

Example 2.

Program Listing

```
10 '          K A L E I D O P E N
20 '           ROBERT F. NICHOLAS
30 CLS
40 DEFINT A-Z
50 CLEAR 2000
60 PRINT@456,CHR$(23)"K A L E I D O P E N";
70 FOR TI=1 TO 1500
80 NEXT TI
90 CLS
100 DIM P$(5)
110 PRINT"THIS IS A KALEIDOPEN.
120 PRINT"      PRESS A # FROM 1 TO 8 FOR DIRECTION OF
    YOUR MOVE.
130 PRINT"      PRESS 'S' TO STOP A LINE.
140 PRINT"      PRESS 'E' TO ERASE (FOLLOWED BY THE DIR
    ECTION #).
150 PRINT"              ALSO USE 'E' TO SKIP TO A NEW P
    OSITION WITHOUT
160 PRINT"              LEAVING A TRACE.
170 PRINT"      PRESS 'B' TO CLEAR SCREEN AND GET A NEW
     DRAWING BOARD.
180 PRINT
190 PRINT"              THE DIRECTIONS ARE AS FOLLOWS:
1224 PRINT@728,"+";
210 PRINT@736,"1";
220 PRINT@668,"2";
230 PRINT@600,"3";
240 PRINT@660,"4";
250 PRINT@721,"5";
260 PRINT@788,"6";
270 PRINT@856,"7";
280 PRINT@796,"8";
290 PRINT@960,"   ";
300 INPUT"HIT ENTER TO CONTINUE DIRECTIONS";X
310 CLS
320 PRINT"   NOTE THAT YOU DO NOT HIT THE ENTER KEY WHI
    LE YOU ARE
330 PRINT"DRAWING A PICTURE.  JUST PRESS THE KEY YOU DE
    SIRE.
340 PRINT
350 PRINT"   IF YOU WISH TO SAVE ONE OF YOUR PICTURES,
    DEPRESS BOTH
360 PRINT"PLAY AND RECORD KEYS ON RECORDER AND THEN PRE
    SS 'P'.
370 PRINT
380 INPUT"DO YOU WANT TO RECALL A PICTURE PREVIOUSLY SA
    VED (Y/N)";Z$
390 CLS
400 Z$=LEFT$(Z$,1)
410 IF Z$="Y" THEN 1470
420 INPUT"ENTER STARTING COORDINATES X (0-63),Y (0-23)"
    ;X,Y
430 CLS
440 IF (X<0 OR X>63) OR (Y<0 OR Y>23) THEN 420
450 GOSUB 1170
460 E=0
470 A$=""
480 B$=""
490 U=0
500 R=0
510 REM INKEY$ ROUTINE TO ENTER DRAWING COMMANDS
520 B$=INKEY$
530 REM STOP DRAWING
540 IF B$<>"S" THEN 580
550 GOSUB 1170
560 GOTO 460
570 REM GO INTO ERASE MODE
580 IF B$<>"E" THEN 640
590 E=1
600 B$=""
610 GOSUB 1230
620 GOTO 520
630 REM CLEAR THE BOARD AND BEGIN A NEW DESIGN
640 IF B$<>"B" THEN 680
650 CLS
660 GOTO 420
670 REM GO SAVE THE DESIGN ON TAPE
680 IF B$="P" THEN 1300
690 A$=A$+B$
700 REM DRAW WEST
710 IF A$<>"5" THEN 760
720 R=-1
730 U=0
740 GOTO 1100
750 REM DRAW NORTHWEST
760 IF A$<>"4" THEN 810
770 R=-1
780 U=-1
790 GOTO 1100
800 REM DRAW EAST
810 IF A$<>"1" THEN 860
820 R=1
830 U=0
840 GOTO 1100
850 DRAW SOUTHWEST
860 IF A$<>"6" THEN 910
870 R=-1
880 U=1
890 GOTO 1100
900 REM DRAW NORTH
910 IF A$<>"3" THEN 960
920 R=0
930 U=-1
940 GOTO 1100
950 REM DRAW SOUTHEAST
960 IF A$<>"8" THEN 1010
970 R=1
980 U=1
990 GOTO 1100
1000 REM DRAW SOUTH
1010 IF A$<>"7" THEN 1060
1020 R=0
1030 U=1
1040 GOTO 1100
1050 REM DRAW NORTHEAST
1060 IF A$<>"2" THEN 520
1070 R=1
1080 U=-1
1090 REM CHECK NEW POSITION IS WITHIN SCREEN BOUNDARIES
1100 IF X+R<0 OR X+R>63 OR Y+U<0 OR Y+U>23 THEN 460
1110 X=X+R
1120 Y=Y+U
1130 GOSUB 1170
1140 IF E=1 THEN GOSUB 1230
1150 B$=""
1160 GOTO 520
1170 REM SET POINTS IN ALL FOUR QUADRANTS
1180 SET(X,Y)
1190 SET(127-X,Y)
1200 SET(X,47-Y)
1210 SET(127-X,47-Y)
1220 RETURN
1230 REM RESET POINTS IN ALL FOUR QUADRANTS
1240 RESET(X,Y)
1250 RESET(127-X,Y)
1260 RESET(X,47-Y)
1270 RESET(127-X,47-Y)
1280 RETURN
1290 REM SAVE DESIGN ON TAPE
1300 P$=""
1310 N=1
1320 FOR X=15360 TO 16382
1330 P=PEEK(X)
1340 IF P=32 THEN P$=P$+CHR$(128) ELSE P$=P$+CHR$(P)
1350 N=N+1
1360 IF N<250 THEN 1400
1370 N=1
1380 PRINT#-1,P$
1390 P$=""
1400 NEXT X
1410 P=PEEK(16383)
1420 PRINT#-1,P$,P
1430 CLS
1440 PRINT"PICTURE HAS BEEN SAVED.
1450 GOTO 380
1460 REM RECALL DESIGN FROM TAPE
1470 PRINT"   DEPRESS PLAY BUTTON ON RECORDER.  AFTER P
    ICTURE HAS BEEN
1480 PRINT"PRINTED, HIT 'ENTER' TO ERASE SCREEN AND BEG
    IN ANOTHER DESIGN.
1490 PRINT"WHEN TAPE RECORDER IS READY, HIT 'ENTER'.
1500 INPUTX
1510 CLS
1520 FOR J=1 TO 4
1530 INPUT#-1,P$(J)
1540 NEXT J
1550 INPUT#-1,P$(5),P
1560 PRINT@0,"";
1570 FOR J=1 TO 5
1580 PRINT P$(J);
1590 NEXT J
1600 POKE 1v383,P
1610 IF INKEY$="" THEN 1610 ELSE CLS
1620 GOTO 380
```

the electric pencil II™

©1980 Michael Shrayer



for the TRS-80 Model II* Computer

The Electric Pencil is a Character Oriented Word Processing System. This means that text is entered as a continuous string of characters and is manipulated as such. This allows the user enormous freedom and ease in the movement and handling of text. Since lines are not delineated, any number of characters, words, lines or paragraphs may be inserted or deleted anywhere in the text. The entirety of the text shifts and opens up or closes as needed in full view of the user. Carriage returns as well as word hyphenation are not required since each line of text is formatted automatically.

As text is typed and the end of a screen line is reached, a partially completed word is shifted to the beginning of the following line. Whenever text is inserted or deleted, existing text is pushed down or pulled up in a wrap around fashion. Everything appears on the video display screen as it occurs thereby eliminating any guesswork. Text may be reviewed at will by variable speed or page-at-a-time scrolling both in the forward and reverse directions. By using the search or the search and replace function, any string of characters may be located and/or replaced with any other string of characters as desired. Specific sets of characters within encoded strings may also be located.

When text is printed, The Electric Pencil automatically inserts carriage returns where they are needed. Numerous combinations of Line Length, Page Length, Character Spacing, Line Spacing and Page Spacing allow for any form to be handled. Right justification gives right-hand margins that are even. Pages may be numbered as well as titled.

the electric pencil

–a Proven Word Processing System

The TRSDOS versions of The Electric Pencil II are our best ever! You can now type as fast as you like without losing any characters. New TRSDOS features include word left, word right, word delete, bottom of page numbering as well as extended cursor controls for greater user flexibility. BASIC files may also be written and simply edited without additional software.


Our CP/M versions are the same as we have been distributing for several years and allow the CP/M user to edit CP/M files with the addition of our CONVERT utility for an additional $35.00. CONVERT is not required if only quick and easy word processing is required. A keyboard buffer permits fast typing without character loss.

	CP/M	TRSDOS
Serial Diablo, NEC, Qume	$ 300.00	$ 350.00
All other printers	$ 275.00	$ 325.00

The Electric Pencil I is still available for TRS-80 Model I users. Although not as sophisticated as Electric Pencil II, it is still an extremely easy to use and powerful word processing system. The software has been designed to be used with both Level I (16K system) and Level II models of the TRS-80. Two versions, one for use with cassette, and one for use with disk, are available on cassette. The TRS-80 disk version is easily transferred to disk and is fully interactive with the READ, WRITE, DIR, and KILL routines of TRSDOS.

TRC	Cassette	$ 100.00
TRD	Disk	$ 150.00

✓255

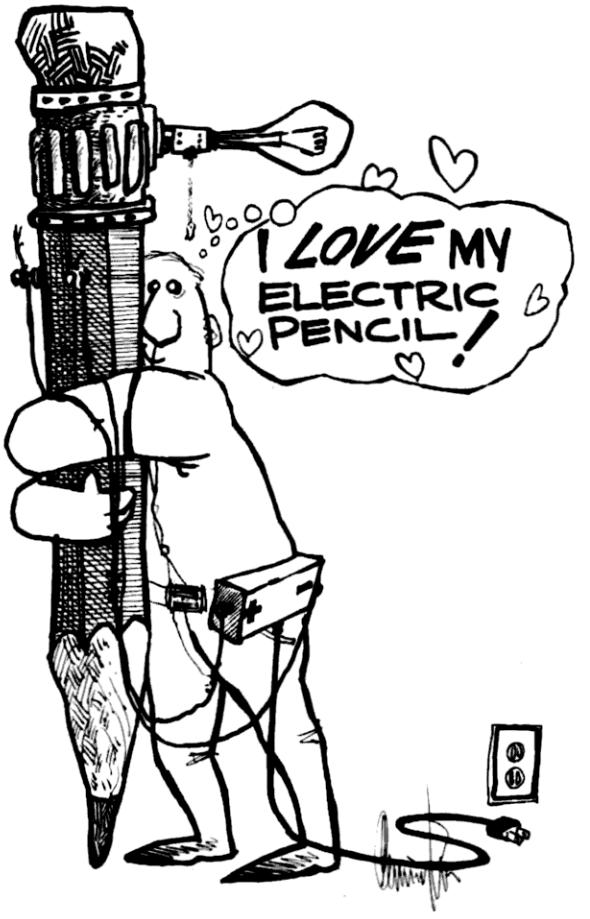

Features

TRSDOS or CP/M Compatible * Supports Four Disk Drives * Dynamic Print Formatting * Diablo, NEC & Qume Print Packages * Multi-Column Printing * Print Value Chaining * Page-at-a-time Scrolling * Bidirectional Multispeed Scrolling * Subsystem with Print Value Scoreboard * Automatic Word & Record Number Tally * Global Search & Replace * Full Margin Control * End of Page Control * Non Printing Text Commenting * Line & Paragraph Indentation * Centering * Underlining * Boldface

VISA

master charge THE INTERBANK CARD

*TRS-80 is a registered trade mark of Radio Shack, a division of Tandy Corp.

mss

MICHAEL SHRAYER SOFTWARE, INC.
1198 Los Robles Dr.
Palm Springs, CA. 92262
(714) 323-1400

✓Reader Service – see page 162

Have fun with PEEK & POKE making your game simulations realistic

Real-time Graphics

Richard A. Zidonis
4500 Ardmore Ave.
Cleveland OH 44144

If your friends were like mine, the first thing they asked about your computer was, "What can it do?" Most likely, you responded by loading a game program. As time went on, you became less impressed with the standard Wumpus or lander game and struck out on your own to develop the ultimate game program. And that's where we begin!

PEEKing

I have a Radio Shack TRS-80, 16K, Level II system.

The TRS-80 has an available command called INKEY$. The INKEY$ function returns a one-character string equal to a strobed keyboard depression. This allows you to interact with the system during real time. Visions of real-time video games came to my mind at once. But as often happens, problems came into play. For instance, if you had a dot on the screen that you wished to move to the left, a single keystroke could start it moving, but another keystroke would be needed to stop it. This problem was quite troublesome for awhile, but the solution finally materialized.

We will develop a method of moving and stopping a game paddle with a single keystroke, and at computer real time. Not only that, but we're also going to move it at a speed rivaling a true analog-input video game.

To do this we first need to develop a method of determining the presence of a single depressed key. The TRS-80 system is memory mapped. Upon looking at the memory map, we find that the keyboard is located between memory locations decimal 14336 and decimal 15359. Knowing that, let's PEEK some keyboard locations.

The PEEK command in Level II requires that a variable be assigned to what is found at the PEEK location. As in the statement X = PEEK (14337), the decimal value of memory location 14337 is assigned to the variable X. Still with me? Since we can only assign variables to alpha (A) or alphanumeric (A1) characters, we are only interested in PEEKing the letters of the alphabet. Refer to Table 1. Note the first 16 keyboard memory locations (for the alphabet) and the PEEK value for each letter of the alphabet. If you are saying to yourself that it looks repetitive and long, don't despair; it's not.

If we tell the system X = PEEK

	14336	14337	14338	14339	14340	14341	14342	14343	14344	14345	14346	14347	14348	14349	14350	14351
A	0	2	0	2	0	2	0	2	0	2	0	2	0	2	0	2
B		4		4		4		4		4		4		4		4
C		8		8		8		8		8		8		8		8
D		16		16		16		16		16		16		16		16
E		32		32		32		32		32		32		32		32
F		64		64		64		64		64		64		64		64
G		128		128		128		128		128		128		128		128
H	0	0	1	1	0	0	1	1	0	0	1	1	0	0	1	1
I			2	2			2	2			2	2			2	2
J			4	4			4	4			4	4			4	4
K			8	8			8	8			8	8			8	8
L			16	16			16	16			16	16			16	16
M			32	32			32	32			32	32			32	32
N			64	64			64	64			64	64			64	64
O			128	128			128	128			128	128			128	128
P	0	0	0	0	1	1	1	1	0	0	0	0	1	1	1	1
Q					2	2	2	2					2	2	2	2
R					4	4	4	4					4	4	4	4
S					8	8	8	8					8	8	8	8
T					16	16	16	16					16	16	16	16
U					32	32	32	32					32	32	32	32
V					64	64	64	64					64	64	64	64
W					128	128	128	128					128	128	128	128
X	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
Y									2	2	2	2	2	2	2	2
Z									4	4	4	4	4	4	4	4

Table 1. PEEK chart.

DECIDE NOW... BECAUSE THE PRICE IS GOING UP.



If you haven't made up your mind yet about a subscription to ***80 Microcomputing*** . . . ***NOW IS THE TIME.*** July 1, 1980, the cover price of ***80 Microcomputing*** is increasing to $2.50 and along with it the subscription prices are going up. ***BUT, 80 Microcomputing*** is extending the time that you can subscribe or renew ***AT THE OLD RATES*** until July 18, 1980.

You've seen the first issues of ***80 Microcomputing*** and now you know that we were serious when we said we'd bring you the most complete journal for the users of the ***TRS-80**** . . . one filled with applications, reviews, programs and more of Wayne Green's thought-provoking editorials. ***SO SIGN UP TODAY*** at $15.00/1 year, $24.00/2 years and $36.00/3 years rather than get hit by inflation again and pay the new rates of $18.00/$30.00/$45.00.

ALL PREVIOUS SUBSCRIPTION OFFERS TO 80 MICROCOMPUTING ARE VOID JULY 18, 1980

☐ New Subscription ☐ Renewal (please affix an address label from your most recent magazine)
☐ 1 year/$15.00 ☐ 2 years/$24.00 ☐ 3 years/$36.00
☐ Payment enclosed Bill: ☐ Me ☐ Master Charge ☐ VISA ☐ AMEREX

Card #_____

Signature _____

Expire Date_____ Interbank #_____

Name/Label _____

Address _____

City_____ State_____ Zip _____

Canadian $15.00/1 year only US funds Foreign $26.00/1 year only US funds

THIS CARD EXPIRES JULY 18, 1980

80 microcomputing T.M.

PO BOX 981
FARMINGDALE NY 11737

307B8

*a trademark of Tandy Corporation.

VERBATIM® ATHANA® GEORGIA MAGNETICS®

Floppy Diskettes for ANY COMPUTER SYSTEM

8″ Floppies only $3.20 ea.
HUNDRED LOTS

10 for $3.65 ea. • **50 for $3.40** ea.

We reserve the right to ship either of the name brands that we carry.

5¼″ Mini-floppies only $2.60 ea.
HUNDRED LOTS


10 for $3.10 ea. • **50 for $2.85** ea.

SPECIFY SIZE, TYPE, & COMPUTER
5¼″ Soft Sector, 10 Sector, 16 Sector—8″ IBM Compatible, Hard Sector

CALL TOLL-FREE 24 HRS. TO ORDER
800-824-7888
OPERATOR 814
CALIFORNIA 800-852-7777
Schools and universities gladly serviced
or C.O.D.

DC SOFTWARE & COMPUTER PRODUCTS
POST OFFICE BOX 503
SAN BRUNO, CALIF. 94066
✓59
FOR INFORMATION 415-348-2387

DISK DRIVE WOES? PRINTER INTERACTION?
MEMORY LOSS? ERRATIC OPERATION?
DON'T BLAME THE SOFTWARE!



ISO-1 ISO-2

Power Line Spikes, Surges & Hash could be the culprit!
Floppies, printers, memory & processor often interact!
Our unique ISOLATORS eliminate equipment interaction AND curb damaging Power Line Spikes, Surges and Hash.

*ISOLATOR (ISO-1A) 3 filter isolated 3-prong sockets; integral Surge/Spike Suppression; 1875 W Maximum load, 1 KW load any socket $56.95
*ISOLATOR (ISO-2) 2 filter isolated 3-prong socket banks; (6 sockets total); integral Spike/Surge Suppression; 1875 W Max load, 1 KW either bank $56.95
*SUPER ISOLATOR (ISO-3), similar to ISO-1A except double filtering & Suppression $85.95
*ISOLATOR (ISO-4), similar to ISO-1A except unit has 6 individually filtered sockets $96.95
*ISOLATOR (ISO-5), similar to ISO-2 except unit has 3 socket banks, 9 sockets total . . . $79.95
*CIRCUIT BREAKER, any model (add-CB) Add $ 7.00
*CKT BRKR/SWITCH/PILOT any model (-CBS) . . . . . Add $14.00

PHONE ORDERS 1-617-655-1532
Electronic Specialists, Inc.
✓58 171 South Main Street, Natick, Mass. 01760
Dept. 8M

15360	PLUS 63 =	15423
15424		15487
15488		15551
15552		15615
15616		15679
15680		15743
15744		15807
15808		15871
15872		15935
15936		15999
16000		16063
16064		16127
16128		16191
16192		16255
16256		16319
16320		16383

Position 15360 is the same as print location zero.

Position 15551 is the last print position in the third row, etc.

Table 2. POKE chart.

(14337) and then depress an "A" key, the variable X will have a value of 2. If the above PEEK statement is locked in a loop, the variable X will take on the PEEK value *only during the key depression.* With the A key depressed, X returns a decimal value of 2; with the key *not* depressed, X returns a decimal value of zero. Now if that doesn't forward-bias the LED above your head, keep reading. Keep reading anyway; we're not done.

POKE

First let's change the subject for a moment. The TRS-80 graphics character consists of a block two bits wide by three bits deep. Each of these bits can be accessed and turned on by the set (X,Y) command and turned off by the reset (X,Y) command. This method is effective but terribly slow. Fortunately, we have an alternative. We can POKE the graphics positions. Refer to Table 2, which shows you the POKE locations of all the print locations. POKE location 15360 is the same as print location zero.

As you can see, the chart is self-explanatory. If you know the print position you can find the POKE position. OK? So now we have established places to POKE, but what do we POKE? Time to move on again.

Available Graphics

Via the TRS-80, we have available a number of ASCII codes (129-191). If you examine these codes, you will see that they are different configurations of the 2 x 3 graphics block. To do the examining, the command is PRINT CHR$ (X). If X equals one of the available graphics codes, you will see a graphics configuration displayed.

To see what is available, refer to Table 3, which shows the ASCII number and the corresponding display. An X refers to a bit turned on, and an O refers to a bit *not* on. For instance, a PRINT CHR$ (191) results in all six bits turning on. A PRINT CHR$ (149) results in the bits on the left side of the block being turned on. As you can see, we have lots of different configurations available for our use.

Doing It

Now that all the preliminaries are out of the way, let's get it working. Refer to the short program in Listing 1. While referring to this program, let's decipher each line and see what we have.

Line 10 is easy; it's a standard clear screen command. Line 20 sets the initial value of X to be used when we start POKEing. Table 2 shows that the location of the POKE is on the left side of the display about halfway down.

In line 30 we ae assigning the value of PEEK (14337) to the variable named Y. In line 40 we set the stage for moving our paddle. The line starts with IF Y=2 THEN POKE X,128. The only time Y can equal 2 is during the depression of the A key on the keyboard.

Scanned by Ira Goldklang - www.trs-80.com

If Y does equal two then we POKE X, 128. The format for POKE (in my system) is POKE LOCATION, INFORMATION. The ASCII character code for a space is 128. After POKEing the space we increment the value of X by 64 (puts us one line down). The last portion of line 40 keeps the value of X within our video POKE positions; otherwise, we POKE into places we do not need to be, such as the program, the stack, etc. This causes all kinds of nasty crashes. Line 50 decreases the value of X during a key depression, which produces a Y value of 4, which happens to be the B key. Line 60 POKEs at our new X value the ASCII graphics code 149. Looking at Table 3, we find 149 to be all the bits on the left side of the graphics block. Line 70 loops us back to our PEEK statement at line 30.

In a nutshell, what we are doing is quickly lighting a graphics position, erasing it and relighting it at the new location as is appropriate. If you have the program in your system, you will notice that when you depress the A or B key the paddle moves, and when you release the key the paddle stops. What we have is real-time interaction with our program with a single key depression. Use the keyboard table to pick where you want to PEEK. In the case of the UP, DOWN, LEFT and RIGHT commands, you may use several PEEK locations assigned different variables—for instance, U = PEEK (14340). When the U

129	130	131	132	133	134
xo	ox	xx	oo	xo	ox
oo	oo	oo	xo	xo	xo
oo	oo	oo	oo	oo	oo

135	136	137	138	139	140
xx	oo	xo	ox	xx	oo
xo	ox	ox	ox	ox	xx
oo	oo	oo	oo	oo	oo

141	142	143	144	145	146
xo	ox	xx	oo	xo	ox
xx	xx	xx	oo	oo	oo
oo	oo	oo	xo	xo	xo

147	148	149	150	151	152
xx	oo	xo	ox	xx	oo
oo	xo	xo	xo	xo	ox
xo	xo	xo	xo	xo	xo

153	154	155	156	157	158
xo	ox	xx	oo	xo	ox
ox	ox	ox	xx	xx	xx
xo	xo	xo	xo	xo	xo

159	160	161	162	163	164
xx	oo	xo	ox	xx	oo
xx	oo	oo	oo	oo	xo
xo	ox	ox	ox	ox	ox

165	166	167	168	169	170
xo	ox	xx	oo	xo	ox
xo	xo	xo	ox	ox	ox
ox	ox	ox	ox	ox	ox

171	172	173	174	175	176
xx	oo	xo	ox	xx	oo
ox	xx	xx	xx	xx	oo
ox	ox	ox	ox	ox	xx

177	178	179	180	181	182
xo	ox	xx	oo	xo	ox
oo	oo	oo	xo	xo	xo
xx	xx	xx	xx	xx	xx

183	184	185	186	187	188
xx	oo	xo	ox	xx	oo
xo	ox	ox	ox	ox	xx
xx	xx	xx	xx	xx	xx

189	190	191
xo	ox	xx
xx	xx	xx
xx	xx	xx

Table 3. Graphics chart.

THE LOWEST

prices on this high-quality software. Buy direct and save 50%. Now, also available for CBASIC on CP/M and MBASIC on HEATH HDOS.

DATA BASE MANAGER **Mod-I $69 Mod-II $199**
You can use it to maintain a data base & produce reports without any user programming. Define file parameters & report formats on-line. Key random access, fast multi-key sort, field arith., label, audit log. No time-consuming overlays. 500 happy users in a year. Mod-II version with over 50 enhancements.

A/R **Mod-I $69 Mod-II $149**
Invoices, statements, aging, sales analysis, credit checking, form input, order entry. As opposed to most other A/R, ours can be used by doctors, store managers, etc.

WORD PROCESSOR **Mod-I $49 Mod-II $49**
Center, justification, page numbering...Used for letters, manuals, and reports. Mod-I version features upper/lower case without hardware change!

MAILING LIST **Mod-I $59 Mod-II $99**
The best! Compare and be selective. Form input, 5-digit selection code, zip code ext., sort any field, multiple labels. Who else offers a report writer?

INVENTORY **Mod-I $99 Mod-II $149**
Fast, key random access. Reports include order info, performance summary, E.O.Q., and user-specified reports. Many converted their inventory to ours!

PAYROLL, A/R, A/P, and GL available for the Mod-II DOS and CP/M.

L216, a cassette package of 10 business programs for Level II 16K systems, $59.

All programs are on-line, interactive, random access, virtually bug free, documented and delivered on disks. Mod-I programs require 32K TRSDOS, and credit is allowed when you upgrade to Mod-II. We challenge all software vendors to offer low cost manuals so you can compare and avoid those high-priced, undocumented, 'on-memory' programs. Manuals alone $5 for Mod-I, $10 for Mod-II. Don't let our low prices fool you!

Mod-II programs are extensively modified, guaranteed to run with 1 year newsletter and updates. 10% off for ordering more than 1 Mod-II program.

MICRO ARCHITECT, INC., ↙54
96 Dothan St., Arlington, MA 02174

TRS-80* — CONDENSE

The Ultimate in BASIC Compression Utilities

** Release 1.3 Now Available **

- Write BASIC programs using single statement lines for ease of maintenance.
- Write BASIC programs with unlimited remarks and comments to improve program readability and documentation....

— AND STILL GET —

OPTIMUM USE OF MEMORY — FASTER PROGRAM EXECUTION

- Compresses programs up to 70% of original size
- Improves execution time by as much as 30%
- Creates multiple-statement program lines
- Blank compression
- Remark and comment deletion
- Renumbers GOTO, GOSUB, THEN, ELSE, and RESUME statements which reference deleted line numbers
- PLUS THESE NEW USER REQUESTED OPTIONS:
  - Retention of low numbered remark statements
  - Checkpoint / Restart Facilities
  - Phase 1 work file

Model I $21.95 (Diskette) **Model II $24.95** (Diskette)

INTERNATIONAL SOFTWARE ASSOCIATES
P.O. Box 14805 ↙187
Omaha, Ne. 68124

Tandy Corporation*

↙Reader Service—see page 162

key is depressed on the keyboard, your variable U returns a decimal 32. When the U is not depressed, you have a zero returned to your variable.

In the case of an actual video display, use Table 2 to find the screen location and Table 3 to find your particular graphics character. Also—hadn't mentioned it before—you can POKE any character, number, symbol or control code that you may desire by referring to the appropriate chart in your user's manual.

```
10    CLS
20    X=15808
30    Y=PEEK(14337)
40    IF Y=2 THEN POKE X,128 : X=X+64 :
      IF X > 16320 THEN X=16320
50    IF Y=4 THEN POKE X,128 : X=X-64 :
      IF X < 15360 THEN X=15360
60    POKE X,149
70    GOTO 30
80    REM  "A" FOR UP AND "B" FOR DOWN
```

Listing 1.

New Thoughts

Now that we have all that accomplished, you can start writing your ultimate game program, either a video game as above or the ever-popular lander-type program. Use the above idea to enter fuel and direction during real time. The trouble with a lot of present lander games is that the program stops and allows you to think. With real-time entries you become a busy pilot. It will also be almost impossible to come up with a set routine to land your lander. How about running a dot through a maze? You could have an incrementing counter in your control loop that gives a relative time readout upon negotiating the maze.

I put this article together to demonstrate a function that I find convenient. If you find it interesting, then I have accomplished my goal. If you have also picked up some general PEEK, POKE and graphics information, then I have doubly succeeded.

Conclusions

Just remember to put your PEEK statement in a loop where it will be strobed. You can branch out when your statement is qualified and then return. When POKEing the video section, always put in an upper and lower POKE limit to keep from crashing through. ■

FORTH is an advanced language/system for advanced programmers. MMSFORTH is a professional version tailored to the Radio Shack TRS-80 Model 1 and professionally supported by Miller Microcomputing Services.

Interpreter, Compiler, Assembler, Full-Screen Editor
Structured & Modular Programming
Extendable Instruction Set w/Source Code
Graphics, Strings, Arrays, Double Precision
Very Fast and Compact, Virtual Memory
Includes 5 Demo Programs w/Source Code

MMSFORTH System Diskette (16K, 1 drive) $64.95
MMSFORTH System Cassette (16K, Level II) $44.95
microFORTH PRIMER (required for above) $1[illegible]
THE DATAHANDLER in MMSFORTH (32K, 1 drive) – an exceptionally fast, flexible and easy to use Data Base Management System $49.95
P.I.M.S. Manual (required for DATAHANDLER) $ 9.95
FLOATING POINT MATH and FULL Z80 ASSEMBLER Diskette (16K, 1 drive) $29.95
Other FORTH literature
USING FORTH – more detailed and advanced than microFORTH PRIMER $25.00
URTH TUTORIAL MANUAL – very readable introduction $19.95
CALTECH FORTH MANUAL – good on FORTH internal structure $ 6.95

Shipping is $2 plus $1 per extra book (Mass. orders add 5% tax, foreign plus 15%)

MMSFORTH ✓112

MILLER MICROCOMPUTER SERVICES
61 Lake Shore Road, Natick, MA 01760 (617) 653-6136
Send SASE for free information

CompuCover®



COVER YOUR INVESTMENT

- Cloth Backed Naugahyde Vinyl
- Improved Reliability
- Longer Life
- Waterproof & Dustproof
- Three Decorator Colors
Saddle Tan • Electra Blue • Black

Send check or money order to:
Include $1.00 for postage and handling
Overseas orders include $3.00 postage
DEALER INQUIRES INVITED

CompuCover ✓100
P.O. Box 324 (Dept. C)
Mary Esther, FL 32569
Phone (904) 243-5793

APPLE • TRS-80 • IBM • WANG • ALTAIR • DATA GENERAL • COMMODORE • PET •

MAXELL®
OR SCOTCH® BRAND DISKS

Some computerists pay less but may not get Shuggart® or IBM® approved disks.

8" SINGLE SIDE · DOUBLE DENSITY
Box of 10 FOR $50.00
8" DOUBLE SIDE · DOUBLE DENSITY
Box of 10 FOR $65.00
5¼" MINI — *Box of 10 FOR $40.00*

NEW DYSAN® DISKS
5¼" Mini · Box of 5 for $25.00

VISA
Master Charge

COD $1.00 Additional — Specify (8" · Soft or Hard Sector) (5"-Soft or Hard Sector)

CUSTOM ELECTRONICS INC. ✓121
238 EXCHANGE STREET
CHICOPEE, MASS. 01013
EST. 1960 1—413—592-4761
HOURS: Tues. to Sat. — 9 to 5

• ATARI • • • TI/99-4 • MATELL •

TRS-80™ SOFTWARE

GUITAR CORDS II •
Has 118 chords that are displayed with graphic, to teach the guitar. Chords can be added, deleted, changed, placed in any order, and be made to last for any length of time. Software directory said, (Here is a brilliant idea) and (one of the most practical ideas I have seen for personal computers). $19.95

BARTENDER •
84 recipes at your disposal. Pick a drink by name, or from a rotating list by just the touch of a key. Shows proper glass to use, with appealing graphics. Test them all and find your favorite, includes Pina Colada. $14.95

SIGNING •
Learn to talk with the deaf and dumb. Type in any phrase up to 2,000 characters long. It then reads back one letter at a time, showing the hand positions for each letter. You have control over the speed, and whether or not the phrase shows on the screen, if so the letter being signed is highlighted. $19.95

FORMS •
We also carry forms to aid in all your programming efforts, from documentation to POKEing and PEEKing. You will be most impressed with our CRT map that is equal in size to your 12" CRT, on clear plastic. Write for catalog include S.A.S.E.

EN-JOY COMPUTER PROGRAMS
P.O. BOX 1535
GOLETA, CA 93017
Programs for TRS-80 16K Level II · Calif. Residents add 6%

✓225

EDUCATIONAL SOFTWARE TRS-80*

80+ Programs in:

ELEMENTARY	MATH
SCIENCE	BIOLOGY
GEOGRAPHY	HISTORY
ECONOMICS	ACCOUNTING
FOREIGN LANG.	BUSINESS ED.
GAMES	MAILING LABELS

Programs are grouped into packages of 4 to 7 programs priced at $14.95 per package including shipping and handling. Available on disk or tape.

Write for catalog: ✓89
MICRO LEARNINGWARE, BOX 2134,
N. MANKATO MN 56001, 507-625-2205
"TRS-80 is a registered trademark of TANDY CORP."

STILES COMPUTER SYSTEMS

NEW! For Your TRS-80 — Hard Copy for Under $400.00.

The SCS 2000 printer system uses the reliable SWTPC PR-40 printer. This is a high-speed, dot matrix impact printer. It prints all 64 ASC II upper-case characters at 75 lines/minute on standard 3-7/8-inch wide roll adding machine paper (no expensive silver or thermal paper!)

The printer system comes in two models. The SCS 2000-1 consists of the PR-40 printer, interface, cover and cable to connect it to your expansion interface. Just plug it into any 110-VAC and your expansion interface, and you are ready to LPRINT or LLIST.

The SCS 2000-2 consists of the PR-40 printer, interface, cover and cable to connect it directly to your TRS-80 computer.


No assembly required — no software driver routines required

SCS 2000-1 (for E.I.) $399.00
SCS 2000-2 (for computer) $429.00

Write for details and sample printout to: ✓227


1721 Greenlea Drive
Clearwater, Florida 33515
Tel. (813) 446-6283

SOFTWARE → TRS-80 ← SOFTWARE




PACKAGE ONE INCLUDES: GRAPHIC-TREK "2000" — This full graphics, real time game is full of fast, exciting action! Exploding photon torpedoes and phasers fill the screen! You must actually navigate the enterprise to dock with the giant space stations as well as to avoid klingon torpedoes! Has shields, galactic memory readout, damage reports, long range sensors, etc! Has 3 levels for beginning, average, or expert players! ★ **INVASION WORG** — Time: 3099, Place: Earth's Solar System Mission: As general of Earth's forces, your job is to stop the Worg Invasion and destroy their outposts on Mars, Venus, Saturn, Neptune, etc! Earth's Forces: Androids — Space Fighters — Lazer Cannon — Neutrino Blasters! Worg Forces: Robots — Saucers — Disintegrators — Proton Destroyers! Multi level game lets you advance to a more complicated game as you get better! ★ **STAR WARS** — Manuever your space fighter deep into the nucleus of the Death Star! Drop your bomb, then escape via the only exit. This graphics game is really fun! May the Force be with you! ★ **SPACE TARGET** — Shoot at enemy Ships with your missiles. If they eject in a parachute, capture them — or if you're cruel, destroy them! Full graphics, real time game! ★ **SAUCERS** — This fast action graphics game has a time limit! Can you be the commander to win the distinguished cross! Requires split second timing to win! Watch out!

ONLY $12.95




PACKAGE TWO INCLUDES: CHECKERS 2.1 — Finally! A checkers program that will challenge everyone! Expert as well as amateur! Uses 3-ply tree search to find best possible move. Picks randomly between equal moves to assure you of never having identical games. ★ **POKER FACE** — The computer uses psychology as well as logic to try and beat you at poker. Cards are displayed using TRS-80's full graphics. Computer raises, calls, and sometimes even folds! Great practice for your Saturday night poker match! (Plays 5 card draw). ★ **PSYCHIC** — Tell the computer a little about yourself and he'll predict things about you, you won't believe! A real mind bender! Great amusement for parties. ★ **TANGLE MANIA** — Try and force your opponent into an immobile position. But watch out, they're doing the same to you! This graphics game is for 2 people and has been used to end stupid arguments. (And occasionally starts them!) ★ **WORD SCRAMBLE** — This game is for two or more people. One person inputs a word to the computer while the others look away. The computer scrambles the word, then keeps track of wrong guesses.

ONLY $12.95




PACKAGE THREE INCLUDES: POETRY — This program lets you choose the subject as well as the mood of the poem you want. You give TRS-80 certain nouns or names, then the mood, and it does the rest! It has a 1000-word + vocabulary of nouns, verbs, adjectives and adverbs! ★ **ELECTRIC ARTIST** — Manual: draw, erase, move as well as, Auto: draw, erase and move. Uses graphics bits not bytes. Saves drawing on tape or disk! ★ **GALACTIC BATTLE** — The Swineus enemy have long range phasers but cannot travel at warp speed! You can, but only have short range phasers! Can you blitzkrieg the enemy without getting destroyed! Full graphics — real time! ★ **WORD MANIA** — Can you guess the computer's words using your human intuitive and logical abilities? You'll need to, to beat the computer! ★ **AIR COMMAND** — Battle the Kamikaze pilots. Requires split second timing. This is a FAST action arcade game.

ONLY $12.95



PACKAGE FOUR INCLUDES: LIFE — This Z-80 machine language program uses full graphics! Over 100 generations per minute make it truly animated! You make your starting pattern, the computer does the rest! Program can be stopped and changes made! Watch it grow! ★ **SPACE LANDER** — This full graphics simulator lets you pick what planet, asteroid or moon you wish to land on! Has 3 skill levels that make it fun for everyone. ★ **GREED II** — Multi-level game is fun and challenging! Beat the computer at this dice game using your knowledge of odds and luck! Computer keeps track of his winnings and yours. Quick fast action. This game is not easy! ★ **THE PHARAOH** — Rule the ancient city of Alexandria! Buy or sell land. Keep your people from revolting! Stop the rampaging rats. Requires a true political personality to become good! ★ **ROBOT HUNTER** — A group of renegade robots have escaped and are spotted in an old ghost town on Mars! Your job as "Robot Hunter" is to destroy the pirate machines before they kill any more settlers! Exciting! Challenging! Full graphics!

ONLY $12.95



PACKAGE FIVE INCLUDES: SUPER HORSERACE — Make your bets just like at the real racetrack! 8 horses race in this spectacular graphic display! Up to 9 people can play! Uses real odds but has that element of chance you see in real life! Keeps track of everyone's winnings and losses. This is one of the few computer simulations that can actually get a room of people cheering! ★ **MAZE MOUSE** — The mouse with a mind! The computer generates random mazes of whatever size you specify, then searches for a way out! The second time, he'll always go fastest route! A true display of artificial intelligence! Full graphics, mazes & mouses! ★ **AMOEBA KILLER** — You command a one man submarine that has been shrunken to the size of bacteria in this exciting graphic adventure! Injected into the president's bloodstream, your mission is to destroy the deadly amoeba infection ravaging his body! ★ **LOGIC** — This popular game is based on Mastermind but utilizes tactics that make it more exciting and challenging — has 2 levels of play to make it fun for everyone. ★ **SUBMARINER** — Shoot torpedoes at the enemy ships to get points. Fast action graphics, arcade type game is exciting and fun for everybody!

ONLY $12.95

HARDWARE → TRS-80 ← HARDWARE

MICRO SPEED

Upgrade your "slow" TRS-80 to a **SUPER FAST MACHINE!!** (2.66 MHZ) over **50% FASTER!** Some of the features:

Auto turn-off during cassette or disk access. (This means NO lost programs EVER!) (Turns back on automatically too!) MANUAL control. (Unit may be turned on or off at any time. Yes even during program execution!) Keyboard indicator light "blinks" when micro-speed is on. Stops blinking when off! **Don't wait for SARGON II or any other program!!!** Comes with easy to follow instructions. (Some soldering required.) **OR** take to your local computer store or TV-Appliance Center for quick installation. (5-10 minutes!!) Works with any model, TRS-80.

ONLY $24.95 complete

MICRO BEEP

Simple hook up: Just plug cassette remote jack into unit.


EASILY CONTROLLED FROM BASIC:

OUT 255,4 = on
OUT 255,0 = off

MICRO-BEEP make games more fun as well as provide useful sound output for professional applications!

Works with Any Model I TRS-80

ONLY $9.95 complete



PACKAGE SEVEN INCLUDES: BACKGAMMON 5.0 — 2 different skill levels make this game a challenge to average or advanced players FAST (15 second avg) Looks for best possible move to beat you! FANTASTIC GRAPHICS. Plays doubles and uses international rules ★ **SPEED READING** — Increases your reading speed. Also checks for comprehension of material. Great for teenagers and adults to improve reading skills ★ **PT 109** — Drop depth charges on moving subs. Lower depths get higher points in this fast action graphics game. ★ **YAHTZEE** — Play Yahtzee with the computer. This popular game is even more fun and challenging against a TRS-80! ★ **WALL STREET** — Can you turn your $50,000 into a million dollars? That's the object of this great game Simulates an actual stock market!

ONLY $12.95

PACKAGE SIX INCLUDES: 20 HOME FINANCIAL PROGRAMS — Figures amortization, annuities, description rates, interest tables, earned interest on savings and much, much more. These programs will get used again and again. A must for the conscientious, inflation minded person.

ONLY $12.95

SIMUTEK

↙19

Exceptional Products through Research & Imagination

Send Check, Money Order or Bank Card No. orders to:

SIMUTEK
P.O. Box 35298
Tucson, AZ 85740

Please Add 2.50 Per Order For Postage & Handling

24 HOUR (7 days) HOTLINE
(602) 882-3948
(C.O.D. $3 extra)

Master Charge — **Visa**

Same Day Shipment on Bank Cards, Money Orders & C.O.D.

All Tape Programs Require a Minimum of 16K Level 2
Packages Available on Diskette (32K System) $4.25 Extra
3 or More Packages Get 10% Discount

Dealer Inquiries Invited

TRS-80 IS A REGISTERED TRADEMARK OF TANDY CORP.

↙Reader Service — see page 162

If you don't know your FF from your 00 then try this program for size

Hex Display

```
100 GOSUB370
110 A=0:B=0:C=1:D=10:H=48
120 FORI=1TO10:IFB(0ANDB(100RB)15ANDB(260RB)95ANDB(129PRINTA;B,:IFB)31ANDB(42PRINTA;B,
130 IFB)27ANDB(950RB)128ANDB(192PRINTA;B,"  ";CHR$(B),
140 A=A+1:B=B+1:NEXT
150 FORI=1TO6:H1$=CHR$(H):H2$=CHR$(64+C):IFB)9ANDB(160RB)25ANDB(320RB)95ANDB(129PRINT" ";
H1$;H2$;" ";D,:IFB)41ANDB(48PRINT" ";H1$;H2 $;D,
160 IFB)27ANDB(950RB)128ANDB(192PRINT" ";H1$;H2$;" ";D;"  ";CHR$(D),
170 C=C+1:D=D+1:NEXT
180 B=B+6:C=1:H=H+1:D=D+10
190 IFH1$="2"ANDH2$="F"GOSUB360
200 IFH1$="5"ANDH2$="F"GOSUB360
210 IFH1$="8"ANDH2$="F"GOSUB360
220 IFH1$="9"ANDH2$="F"GOTO240
230 GOTO120
240 D=160:E=1:H=48:K=170:J=65
250 IFD)191GOSUB360:GOTO290
260 FORI=1TO10:H1$=CHR$(J):H2$=CHR$(H):PRINT" ";H1$;H2$;" ";D;" ";CHR$(D),
:D=D+1 H=H+1:NEXT
270 FORI=1TO6:H1$=CHR$(J):H2$=CHR$(64+E):PRINT" ";H1$;H2$;" ";K;"  ";CHR$(K),
:E=E+1:K=K+1:NEXT
280 J=J+1:H=H-10:D=D+6:E=1:K=K+10
285 GOTO250
290 FORI=1TO10:H1$=CHR$(J):H2$=CHR$(H):PRINT" ";H1$;H2$;" ";D;:D=D+1:H=H+1:NEXT
300 FORI=1TO6:H1$=CHR$(J):H2$=CHR$(64+E):PRINT" ";H1$;H2$;" ";K;:E=E+1:K=K+1:NEXT
310 J=J+1:H=H-10:D=D+6:E=1:K=K+10
320 IFH1$="8"ANDH2$="F"GOSUB360
330 IFH1$="E"ANDH2$="F"GOSUB360
340 IFH1$="F"ANDH2$="F"GOTO380
350 GOTO290
360 PRINT:PRINTTAB(20)"WAIT FOR  MORE":FORI=1TO1000:NEXT
370 CLS:PRINT" ";"H";"   ";"D";"   ";"ASCII";TAB(17)"H";"   ";"D";"   ";"ASCII";
TAB(33)"H";"   ";"D";"   ";"ASCII";TAB(49)"H";"   ";
"D";"   ";"ASCII":RETURN
380 PRINTTAB(20)"END OF DISPLAY":END
```

H	D	ASCII	H	D	ASCII	H	D	ASCII	H	D	ASCII
1	1		2	2		3	3		4	4	
5	5		6	6		7	7		8	8	
9	9		0A	10		0B	11		0C	12	
0D	13		0E	14		0F	15		10	16	
11	17		12	18		13	19		14	20	
15	21		16	22		17	23		18	24	
19	25		1A	26		1B	27		1C	28	
1D	29		1E	30		1F	31		20	32	
21	33	!	22	34	"	23	35	#	24	36	$
25	37	%	26	38	&	27	39	'	28	40	(
29	41	)	2A	42	*	2B	43	+	2C	44	,
2D	45	-	2E	46	.	2F	47	/			

WAIT FOR MORE

H	D	ASCII	H	D	ASCII	H	D	ASCII	H	D	ASCII
30	48	0	31	49	1	32	50	2	33	51	3
34	52	4	35	53	5	36	54	6	37	55	7
38	56	8	39	57	9	3A	58	:	3B	59	;
3C	60	<	3D	61	=	3E	62	>	3F	63	?
40	64	@	41	65	A	42	66	B	43	67	C
44	68	D	45	69	E	46	70	F	47	71	G
48	72	H	49	73	I	4A	74	J	4B	75	K
4C	76	L	4D	77	M	4E	78	N	4F	79	O
50	80	P	51	81	Q	52	82	R	53	83	S
54	84	T	55	85	U	56	86	V	57	87	W
58	88	X	59	89	Y	5A	90	Z	5B	91	[
5C	92	\	5D	93	]	5E	94	^	5F	95	_

Dr. H. J. Campbell
Institute of Psychiatry
De Crespigny Park
London SE5 8AF

The speed of many micro applications could be improved by rapid and accurate hexadecimal conversions of decimals 0-255.

Assembly language programming is tedious without this facility and modifying byte data in main memory or disk sectors can be highly dangerous.

Although converting numbers in this range with a pencil and paper is not difficult when done as an exercise, it is a source of distraction and prone to error when carried out while programming or doing surgery on data registers. Yet there appears to be no software available specifically designed for this purpose.

Display ASCII as Well

The program Hexadecimal Display, written here in Level II BASIC, displays not only hex conversions but also the ASCII characters and the TRS-80 graphics characters. The latter, of course, appear only as periods in the printed RUN.

Hexadecimals composed only of numbers can be displayed by using the simple variables A and B. Since variables consisting of a combination of letters and numbers cannot be assigned or called directly, it is necessary to introduce two modifications to the simple A-B scheme.

Firstly, the calls for all number hexadecimals must be made to leapfrog over the alphanumeric ones. This is done with the Boolean logic of line 120, having initialized the variables in line 110.

Secondly, to call the alphanumeric hexadecimals the variables are first assigned to strings and these are then equated with appropriate CHR$ functions. This can be seen in lines 50, 260, 270, 290 and 300.

The logic in line 150 ensures correct spacing in the display. Here, as in all the PRINT lines, meticulous care must be taken with punctuation. Throughout, CHR$(H) provides the hexadecimal number byte and CHR$(64 + C) or CHR$(64 + E) establishes the appropriate letter byte.

Calling the ASCII and graphics characters cannot be done as a continuous series because many of them are control codes, which execute following a PRINT statement. For example, a simple request such as

```
FOR I = 0 TO 255:PRINT CHR$(I):NEXT
```

will founder in several places. The worst, perhaps, is when CHR$(23) is reached. This immediately converts all subsequent display to 32-character format.

Higher codes will do other unacceptable things such as clearing the screen and compressing in tabular fashion. Still, this problem is easily overcome by


Disk-drive Extender Cables

FITS ALL MINI-DISK DRIVES

VISTA • MICROPOLIS • MTI • PERTEC
SHUGART • PERCOM • AND OTHERS

May also be used to interface the R/S Mod II printer out-port to a standard Centronics cable connector — eliminates the need for a special printer cable.



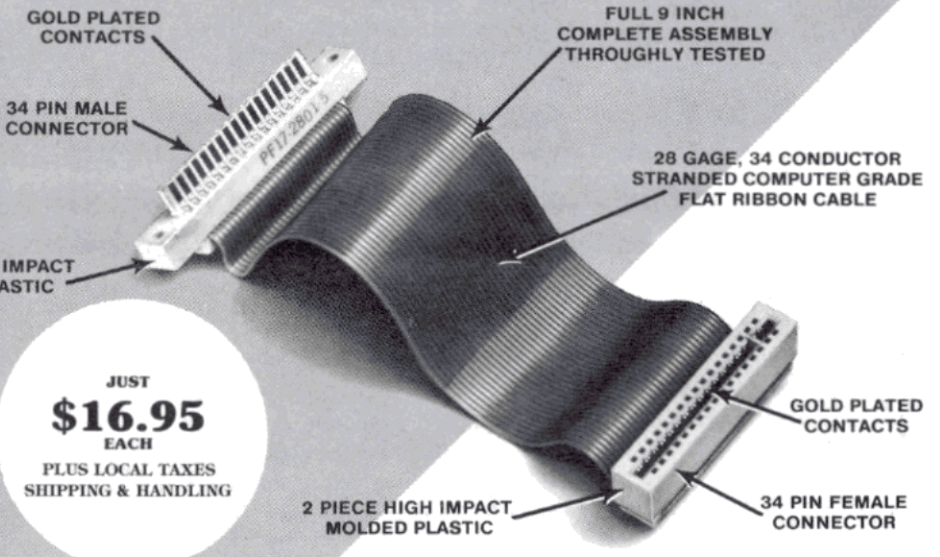

GET ONE FOR EACH DRIVE

END THE HASSLE!

- ELIMINATES SHORT CIRCUITS FROM PINCHED AND WORN CABLES
- ELIMINATES FUMBLING OR DROPPING A DRIVE WHILE MOVING THEM
- ELIMINATES DISASSEMBLY OF DRIVES TO REMOVE A DRIVE FROM THE SYSTEM
- ELIMINATES TANGLED, TWISTED, KINKED AND WORN SYSTEM CABLES
- ELIMINATES DISASSEMBLY OF DRIVE CABINETS TO INSTALL CABLES
- ELIMINATE THE HEADACHES . . . . . GET ONE FOR EACH DRIVE UNIT

JUST **$16.95** EACH
PLUS LOCAL TAXES
SHIPPING & HANDLING

EASY TO INSTALL:
Remove drive cover; mount cable; replace cover . . . . . DONE!

✓37
+ IJG COMPUTER SERVICES
569 NORTH MOUNTAIN AVE. - SUITE B
UPLAND, CALIFORNIA 91786 U.S.A.

UP TO 30% OFF AND IMMEDIATE DELIVERY

TRS 80™ MODEL II 64K **$3626.00** IN-STOCK FULLY GUARANTEED

ORDER NOW (1) 800-345-8102

DISK DRIVES $350.00

OVER $149.00 LESS THAN RADIO SHACK

Fully compatible with Radio Shack's operating system TRSDOS™ and drives. Just plug in and run!

- One, two, three or four drive configurations, 102k to 408k bytes.
- All systems include a patch program to upgrade your TRSDOS™ to 40 tracks.
- Cases are furnished in gray to match your system.

ORDER NOW (1) 800-345-8102

	LIST PRICE	OUR PRICE
TRS-80 4 K LEVEL I SYSTEM	$499.00	$484.10
TRS-80 4 K LEVEL II SYSTEM	$619.00	$575.70
TRS-80 16 K LEVEL II SYSTEM	$849.00	$789.60
EXPANSION INTERFACE (0 K Memory)	$299.00	$278.10
TELEPHONE MODEM	$199.00	$185.10

	LIST PRICE	OUR PRICE
CENTRONICS 730	$995.00	$695.00
CENTRONICS 737		
• 100 CPS		
• LETTER QUALITY DOT MATRIX		$950.00
• TRUE DESCENDERS		
NEC SPINWRITER 5530 (with Tractors)	3195.00	2950.00

V R DATA CORPORATION
777 HENDERSON BOULEVARD N-6
FOLCROFT INDUSTRIAL PARK
FOLCROFT, PA. 19032 (215) 461-5300
✓31

V R DATA'S TRS-80™ SWEEPSTAKES

Celebrating V. R. DATA's 8th Anniversary

OVER $1700.00 in PRIZES

GRAND PRIZE - 16K LII TRS-80

TWO **SECOND PRIZES - DISK DRIVES**

FOUR **THIRD PRIZES - $50.00 Gift Certificates**

SWEEPSTAKES RULES

1. ALL ENTRIES MUST BE SUBMITTED ON ORIGINAL ENTRY BLANK.
2. ONE ENTRY PER PERSON.
3. WINNERS SELECTED BY RANDOM DRAWING, NOTIFIED BY MAIL.
4. ENTRIES MUST BE RECEIVED BY 10/31/80.
5. VOID WHERE PROHIBITED BY LAW, NO PURCHASE NECESSARY.

MAIL NOW TO ENTER V. R. DATA'S SWEEPSTAKES

NAME _____
ADDRESS _____
CITY _____ STATE _____ ZIP _____
TELEPHONE _____ OCCUPATION _____
COMPUTER EQUIPMENT OWNED _____
_____
_____
INTENDED USE _____
_____

M **SEND FOR CATALOG ☐**

incorporating leapfrogging logic into the lines that display the CHR$ equivalent of the decimal variable, viz. lines 130, 160, 250, 260 and 270.

Hexadecimal Categories

This set of hexadecimals comprises several groups that fall into two categories. One category is the groups in which the first byte runs from A to F; the other category has the numbers 0-9 as the first byte. Each of these categories requires a distinct FORNEXT loop, 1 to 6 and 1 to 10 respectively (see lines 150, 270, 300 for the first category; 120, 260, 290 for the second category).

The values of the variables *within* each loop are changed by the accumulator assignments in lines 140, 170, 260, 270, 290 and 300.

Since each FORNEXT loop assigns its own set of values to the variables, these must be reset correctly for the looping that follows the GOTO statements in lines 230 and 250. Resetting is done in lines 180, 280 and 310.

When the first hexadecimal byte is a letter (decimal 160) and when both bytes are letters (decimal 170) variable values must be reassigned. Line 240 accomplishes this. The pointer is sent here when 9FH is reached (line 220).

As listed, the program scrolls page-size displays with pauses between each page. Interim pages carry the message WAIT FOR MORE and the last page contains the information END OF DISPLAY. These break points cannot, of course, occur within FORNEXT loops, so lines 190-210 and 320-330 call the delay subroutine in line 360 (which may be user-modified to alter the length of the delay period).

When FFH is reached, line 340 sends the pointer to the final message and END of the program in line 380.

Headings for the columns are provided by the subroutine in line 370, which is called at the beginning (line 100) and which follows the various GOSUB, to line 360.

The program responds to BREAK at any time and the RUN may be printed in whole or in part by using the JKL screen printer of NEWDOS+. In the absence of this facility or if hard copy is desired, obviously the PRINT statements should be changed to LPRINTS.

Deliberate compression of the program by avoiding spaces and REMs produces a memory requirement of only 1.1K. Thus the program can usually be SAVEd on most disks where surgery is to be carried out, providing an *in situ* source of hexadecimals which, unlike printouts, cannot become buried under other papers.■

```
                    WAIT FOR MORE

H  D  ASCII   H  D  ASCII   H  D  ASCII   H  D  ASCII
60 96         61 97         62 98         63 99
64 100        65 101        66 102        67 103
68 104        69 105        6A 106        6B 107
6C 108        6D 109        6E 110        6F 111
70 112        71 113        72 114        73 115
74 116        75 117        76 118        77 119
78 120        79 121        7A 122        7B 123
7C 124        7D 125        7E 126        7F 127
80 128        81 129        82 130        83 131
84 132        85 133        86 134        87 135
88 136        89 137        8A 138        8B 139
8C 140        8D 141        8E 142        8F 143

                    WAIT FOR MORE

H  D  ASCII   H  D  ASCII   H  D  ASCII   H  D  ASCII
90 144        91 145        92 146        93 147
94 148        95 149        96 150        97 151
98 152        99 153        9A 154        9B 155
9C 156        9D 157        9E 158        9F 159
A0 160        A1 161        A2 162        A3 163
A4 164        A5 165        A6 166        A7 167
A8 168        A9 169        AA 170        AB 171
AC 172        AD 173        AE 174        AF 175
B0 176        B1 177        B2 178        B3 179
B4 180        B5 181        B6 182        B7 183
B8 184        B9 185        BA 186        BB 187
BC 188        BD 189        BE 190        BF 191

                    WAIT FOR MORE

H  D  ASCII   H  D  ASCII   H  D  ASCII   H  D  ASCII
C0 192        C1 193        C2 194        C3 195
C4 196        C5 197        C6 198        C7 199
C8 200        C9 201        CA 202        CB 203
CC 204        CD 205        CE 206        CF 207
D0 208        D1 209        D2 210        D3 211
D4 212        D5 213        D6 214        D7 215
D8 216        D9 217        DA 218        DB 219
DC 220        DD 221        DE 222        DF 223
E0 224        E1 225        E2 226        E3 227
E4 228        E5 229        E6 230        E7 231
E8 232        E9 233        EA 234        EB 235
EC 236        ED 237        EE 238        EF 239

                    WAIT FOR MORE

H  D  ASCII   H  D  ASCII   H  D  ASCII   H  D  ASCII
F0 240        F1 241        F2 242        F3 243
F4 244        F5 245        F6 246        F7 247
F8 248        F9 249        FA 250        FB 251
FC 252        FD 253        FE 254        FF 255
                    END OF DISPLAY

READY
>_
```

Program Listing

EDUCATIONAL SOFTWARE

Level II—Min 4K

ALPHA For ages 4-7—teaches alphabet recognition; Reinforcement—a "happy" face

SIGMA For Grades 1-3—A random series of one-digit addition problems (i.e. 4 + 5 = 9) Reinforcement—Push the puck through the goal

Simple to use—No depressing the ENTER key

Each $5.95—Both for $10.00

MSI **Mercer Systems Inc.**
87 Scooter Lane
Hicksville, N.Y. 11801

✓104

TRS-80 LEVEL II and Disk Programs

MULTIPLE REGRESSION 2.0—A disk based package of chained programs that permits model estimation using thousands of observations, user specified transformations (write them in BASIC during execution), X-Y plots, formatted for screen or printer + all features of Multiple Regression 1.0 ..... $45.00

LEVEL II 16K PROGRAMS

Multiple Regression 1.0 ..... $29.95
Linear Programming $29.95
0-1 Programming $29.95
Transportation Algorithm $29.95
Heuristic Line Balancing $29.95
Stat. Pack—medium, mode, mean (avg., harmonic, geometric), variance, histograms, Tests (T, X^2, F.) one variable regression, one and two-way ANOVA $9.95
Differential equations—6 methods $29.95
Queuing Statistics $14.95

LOWERCASE MOD—Includes excellent documentation + all parts (nothing else to buy), compatible with Electric Pencil $14.95

✓269

Available in Disk add $5
S.C. residents add 4% sales tax
Overseas orders add $5 for shipping

Quant Systems
p.o. box 628
charleston sc 29402

***** SECURITY CONTROL CENTER *****

You can control light when you're not at home, at random times. Turn video or recording equipment, appliance, bell, loud alarm device on and off at preset times, even months advance. * Comes with program, control module, and ac adaptor * *($29.50)*

*** AUTOMATIC TELEPHONE DIALER ***

You can dial telephone automatically 500 or more. Even if you forgot telephone number, if you remember part of it, you can find the number through search command.
* Comes with program, control module and ac adaptor
* *($29.50)*

****** 80-BEEP *****

To be used to signal the end of long sort and signal you in case of loading error. It also lets you know with one beep, two beeps, etc. Exactly what part of the program you are in.
* Comes with instruction, control module and ac adaptor
* *($29.50)*

✓271

** S-C COMPUTER TECHNOLOGY **
P.O. Box 1246, Covina CA 91722
Phone (213) 332-2216 or 966-9868

—*Visa and Mastercharge accepted*—

COMPUTER PIRATES & DATA THIEVES ARE HERE...



Don't let computer pirates: DIVINE your DATA
FILCHE your FILES
PERUSE your PROGRAMS

Protect them all with CRYPTEXT, the hardware encryption module that brings ultra-high level security to the small computer user. Once encrypted, your files can be stored or transmitted in strictest privacy. A single CRYPTEXT unit will differentially control the medical, legal or financial records, mailing lists, and design data for an entire firm.

Breaking CRYPTEXT encrypted data is like unscrambling an egg. We don't say its impossible but we have 3 oz. of fine gold waiting for the first person who succeeds in breaking our test message.

SECURITY SYSTEMS FOR USE WITH:

TRS-80 APPLE II SUPERBRAIN NORTHSTAR

VISA master charge

CRYPTEXT CORPORATION

P O. Box 426
Northgate Sta.
Seattle, WA 98125

(206) 364-8585

ADVANCED BUSINESS SOFTWARE FOR THE TRS-80

(Now Available For Model II Also)

*** FORECASTING * RISK ANALYSIS * U.S. MACRO MODEL**

If you're serious about improving your business with a computer, why not use the best business planning software available? Dr. David M. Chereb has made the most powerful and successful business analytical techniques available to micro computer users.

All programs listed below are in Basic, for 32K (or more) disk based TRS-80 systems.

BUSINESS PLANNING PACKAGE for FORECASTING - An integrated set of forecasting programs to handle a variety of business forecasting needs from Trend Analysis to Advanced Multiple Regression (100 pg. User Manual) $99.

INVESTMENT RISK ANALYSIS - The major ingredient in any investment is uncertainty. This program accounts for cost changes, shifting revenue streams and interest rate fluctuations. Now you can manage risk. (35 pg. User Manual) $99.

U.S. SIMULATION MODEL - Knowing where the economy is going and how it reacts to government fiscal and monetary actions can save you a lot of money. This is a user oriented economic situation model constructed to professional standards (50 pg. User Manual) $199.

NOTICE TO CUSTOMERS:


Because of the tremendous increase in recent orders, our shipping response time has slowed. We are expanding in order to correct this situation. But for the next month our shipping date will average one week after receipt of your order.

To order **CALL 213/424-3852**, or write to APPLIED ECONOMIC ANALYSIS, 4005 Locust Ave., Long Beach, CA 90807.

✓47

Sirius Systems introduces lower prices to quality drives!

Remex RFD 4000/8" Floppy Disc Drive
Double the storage!
Double sided . . .
Double density!!




549.95

Offers quality and features found in drives costing much more! ■ Single or Double Density ■ Double-Sided Drive ■ Door Lock INCLUDED ■ Write-Protect INCLUDED ■ 180 Day Warranty ■ Compatible with Shugart 850/851 ■ Low Power Operation ensures LONGER LIFE!! ■ Model RFD 4001 offers Data and Sector Separator

AVAILABLE OPTIONS/ACCESSORIES

☐ Dual Drive Power Supply and Cabinet, $139.95
☐ Single Drive Power Supply and Cabinet, $119.95
☐ Interface Manual, $2.95
☐ RFD 4000 Manual, $5.95
☐ Drive Cabinet, $29.95
☐ RFD 4001, $564.95

Remex 1000B
If you've been looking for a less expensive floppy disc drive, but not wanting to sacrifice quality— your search is over!



VOLUME DISCOUNTS AVAILABLE

419.95

You get both in the Remex 1000B! For only $419.95 look at what you get: 8" Floppy Drive ■ Single or Double Density ■ Hard or Soft Sectoring ■ Media Protection Feature ■ Single Density Data Separator ■ 180 Day Factory Warranty

AVAILABLE OPTIONS/ACCESSORIES

☐ Door Lock, $19.95
☐ Dual Drive Power Supply, $91.95
☐ Interface Manual, $2.95
☐ Write-Protect, $19.95
☐ Single Drive Power Supply, $69.95
☐ Interface Adapter, $12.95 (Remex to Shugart)
☐ Connectors, $9.95
☐ Drive Cabinet, $24.95

SIRIUS 80plus

The Perfect Add-On for your TRS-80*



- *Comes complete ready to plug in and run!*
- *5ms track to track*

Up to 102,000 Bytes


SIRIUS 80+1 (Single Head) **$349.95**

SIRIUS 80+2 (Dual Head) **$419.95**

*TRS-80© Tandy Corp.

MPI-51/52

A Great Reliable Mini-Drive!



- *Fast! 5ms track to track access*
- *Exclusive Pulley-Band Design*
- *Unique Door/Ejector Mechanism*
- *Reliable 1½% Speed Stability*

MPI-51 (Single Head) **$259.95**

MPI-52 (Dual Head) **$349.95**

Sirius SYSTEMS ✓67

P O Box 9748, Knoxville, TN., 37920
Phone Orders accepted 9AM-7PM (E S T) (615) 693-6583
☐ Check ☐ Money Order ☐ C O D ☐ MC ☐ VISA ☐ AE

NAME _____ CARD # _____

ADDRESS _____ EXPIRATION DATE _____

CITY _____ STATE _____ ZIP _____ CARDHOLDERS SIGNATURE _____

Add $7 00 per Drive for Shipping/Handling Tennessee residents add 6% sales tax Foreign orders add 10% (payment in U S currency only)

Six programs from four companies, find out the bottom line as Rod Hallen sees it.

Applications Software

Rod Hallen
State Department-Accra
Washington, D.C. 20520

By looking at documentation, ease of loading, difficulty of use and suitability, I will attempt to help the potential buyer decide whether the programs discussed will be useful to him. At the same time, please keep in mind that your requirements and desires may be different than mine and that what appeals to me may turn you off and vice versa.

The Software

Vendor: Micro Architect, 96 Dothan Street, Arlington MA 02174
Name: WORD-1
Purpose: General-purpose word-processing system
Documentation: Four pages—well-written
Loading: OK—Level 7
Implementation: Requires a printer to be of any practical value. Also, the TRS-80 should be modified for lowercase. User should have some BASIC programming background since text is entered into the system as data statements. This is more difficult than the method used in most word processing systems, but they cost at least four times as much as WORD-1. Also, since this is written in BASIC rather than machine language, it is quite slow.
Suitability: This is not for the author or others with high-volume requirements. It is, however, quite suitable for the letter writer or for someone who needs many copies of the same letter with a different name and address on each one. I like word processors because they allow me to correct all of my mistakes without being committed to paper.

Vendor: Micro Architect
Name: BANK-1
Purpose: Personal checkbook accounting system
Documentation: One page—sufficient, mostly self-documenting
Loading: OK—Level 7
Implementation: No hardware requirements except the standard cassette recorder. This program will process and store 100 checks in a 4K machine and 1600 checks if you have 16K. Data is input from the keyboard and includes check number, amount and transaction code. Each check is put into one of a number of categories depending upon the transaction code. All checks can be recalled, changed or deleted, and a summary report can be displayed at any time. The summary breaks expenses down into categories with totals for each one. All check data is stored on cassette for future use.
Suitability: A simple but effective personal accounting system. Should be all that most households will need. Since it is written in BASIC, the names of categories can easily be changed to suit your situation. I have already entered all of last year's checks into its data base.

Vendor: Micro Architect
Name: STOCK-1
Purpose: To keep track of the value of your stock portfolio
Documentation: One page—sufficent, self-documenting
Loading: OK—Level 7
Implementation: Program comes loaded with sample stocks so that the user can get an idea of what to expect. For your own stocks, you enter the date, original price, number of shares and current dividend. The program then computes your current worth by asking for the latest price for each of your stocks. It also figures in the present value of your house. As in WORD-1, all data is input as data statements rather than as a response to an input statement. It is also awkward to use if you have blocks of the same stock that were purchased at different times or for different prices. Each block must be input as a separate stock entry. Data is stored on cassette as part of the program which is resaved anytime that changes are made.
Suitability: The speculator will want something more sophisticated than this. For the user who buys and holds his stocks for a reasonable period of time, this program will compute his net worth and gain or loss position. It will not analyze future stock possibilities.

Other software available from Micro Architect: Cassette Data Base Manager, Inventory Management, Mailing List System, Sorting Utility, Key-access Utility, Statistics Package, Sales Analysis and many more.

Vendor: M, M and S Computer Software. 16 Marylyn Lane, Westbury NY 11590
Name: Statistical Package
Purpose: Designed to compute and display mean, variance and standard deviation, linear correlation coefficient, T-test, anal-

CHEAP BOOKKEEPER

A GENERAL LEDGER SYSTEM

See to Believe

Sold by Sturdivant and Dunn, Inc. for Radio Shack TRS-80* Model I Level II 32 or 48 K systems with 2 drives and at least an 80 character per line printer.

Send $1.00 for information and sample printouts (14 pages) to **Sturdivant and Dunn, Inc., Box 277, Conway, NH 03818.**

✓82

Price is $175.00.

* TRS-80 is a Trademark of Radio Shack, a Division of Tandy corporation.

---

alphanetics

TRS-80© ✓124

TAPE DIGITIZER

Used by the U.S. Coast Guard and U.S. Navy

ALSO AVAILABLE WITHOUT CASSETTE REMOTE ON/OFF SWITCH

$54.95



- ELIMINATES CASSETTE LOADING AND COPYING PROBLEMS . . . EVEN "SYSTEM" TAPES!
- MAKES TAPE PROGRAM LOADING PRACTICALLY INDEPENDENT OF VOLUME CONTROL SETTING!
- MAKES PERFECT COPIES OF ANY TAPE DIGITALLY WITHOUT USING COMPUTER, DIGITIZED TO EXACT REPLICA OF TR-80's SIGNAL WHILE REMOVING HUM, NOISE AND OTHER MINOR DROPOUTS
- A.C. POWERED NO BATTERIES CASSETTE SWITCH ALLOWS MANUAL OR COMPUTER CONTROL OF CASSETTE RECORDER
- FEED YOUR CASSETTE TO THE TAPE DIGITIZER AND FEED YOUR COMPUTER THE EXACT DIGITAL WAVEFORM THE TRS-80 GAVE TO THE TAPE WHILE MAKING A COPY AT THE SAME TIME!
- THE TAPE DIGITIZER IS COMPLETELY COMPATIBLE WITH LEVEL I AND II

$59.95

- "GOOD DATA" INDICATOR EASILY ENABLES SETTING VOLUME CONTROL FOR GOOD PROGRAM AND DATA LOADS EVERY TIME!
- GET RID OF YOUR TAPE BUGS TODAY FOR ONLY $90.95 POSTAGE PAID GUARANTEED TO FIX YOUR TAPE PROBLEMS OR RETURN IN 10 DAYS FOR A FULL REFUND!

24-hour phone
(707) 887-7237

ACU-DATA ALPHANETICS P.O. BOX 397, FORESTVILLE, CALIFORNIA 95436

TRS-80*TRS-80*TRS-80*TRS-80

Model I system owners

SYSTEM TOO SMALL?

We take trade-ins on Model II

We also buy used systems outright

Call or write for quotation

USED TRS-80 SYSTEMS

We sell used keyboards, exp.int., disk drives, etc.

Call or write for quotes

NEW HARDWARE IN STOCK

16K Level II **$749.00**

Radio Shack disk drives **$449.00**

16K Memory-Lifetime warranty **$89.00**

Centronics 730-1 **$749.00**

IDS 440 Paper Tiger **$949.00**

SOFTWARE

Data Management System-Mod I or II

An excellent design-it-yourself software package- **$99.00**

Utilizes and requires Racet Computes GSF and COMPROC

WORD PROCESSOR FOR MODEL II

WORDSCRIBE-By Microphase Systems

A first for Model II-**$150.00**

Completely integrated automatic letter writer for Model II

Consists of WORDSCRIBE, WORDMAIL, MAILLIST-**$250.00**

We Represent

RACET COMPUTES, NEWDOS,ELECTRIC PENCIL, SMALL SYSTEMS SOFTWARE, INSTANT SOFTWARE, TBS, PROGRAMMA, NONPARIEL, MICROPHASE SYSTEMS.

VERN STREET PRODUCTS
114 W.Taft Sapulpa, OK
74066 (918)224-4260

✓111

Radio Shack DEALER

TERMS-COD WELCOME, CASH, CHECK, OR MONEY ORDER
ADD 3%FOR MASTER CHARGE AND VISA

```
      HOME                OFFENSE

1 OFF TACKLE        7 LONG PASS
2 END RUN           8 FIELD GOAL
3 Q. SNEAK          9 PUNT
4 DRAW             10 TIME OUT                12 : 40     4 QUARTER
5 SCREEN           11 RESTORE                VISITOR        HOME
6 SHORT PASS                                   17  SCORE   14
?                                               3 TIME OUTS 3

                  <- HOME   2 DOWN 7 YARDS TO GO

                                 *
   10  20  30  40  >0  40  30  20  10
```

FOOTBALL for the TRS-80*

Now you can play football at home on your Level I 4K TRS-80. You and your opponent plan strategies against each other. The computer analyzes the offensive and defensive plays and calculates yardage lost or gained. Send $19.95 for your football cassette and instructions.*

FERIN ENTERPRISES ✓252

6310 Underwood Ave. S.W.

Cedar Rapids, Iowa 52404

*TRS-80 is a trademark of the Tandy Corp.

YOU TOO can become a successful computer ENTREPRENEUR!



HOW TO START YOUR OWN SYSTEMS HOUSE is a practical step-by-step guide for the EDP professional or small businessman who wants to enter the micro-computer systems business.

Written by the founder of a successful systems house, this fact-filled 220-page manual covers virtually all aspects of starting and operating a small systems company. It is abundant with useful, real-life samples: contracts, proposals, agreements and a complete business plan are included in full, and may be used immediately by the reader.

Proven, field-tested solutions to the many problems facing the small systems house are presented.

From the contents:

• New Generation of Systems Houses • The SBC Marketplace • Marketing Strategies • Vertical Markets & IAPs • Competetive Position/Plans of Major Vendors • Market Segment Selection & Evaluation • Selection of Equipment & Manufacturer • Make or Buy Decision • Becoming a Distributor • Getting Your Advertising Dollar's Worth • Your Salesmen: Where to Find Them • Product Pricing • The Selling Cycle • Handling the 12 Most Frequent Objections Raised by Prospects • Financing for the Customer • Leasing • Questions You Will Have to Answer Before the Prospect Buys • Producing the System • Installation, Acceptance, Collection • Documentation • Solutions to the Service Problem • Protecting Your Product • Should You Start Now? • How to Write a Good Business Plan • Raising Capital

6th edition, March 1980 220 pages

Essex Publishing Co. DEPT. 4
285 Bloomfield Avenue Caldwell, N.J. 07006

I would like to order **HOW TO START YOUR OWN SYSTEMS HOUSE** at $36.00 (New Jersey residents add 5% sales tax) ✓272

☐ Check Enclosed ☐ VISA ☐ Mastercharge

Name _____

Address _____

City _____

State _____ Zip _____

Card # _____ exp. _____

For immediate shipment on credit card orders call (201) 783-6940

ysis of variation and analysis of covariance from user input.

Documentation: Five pages—excellent

Loading: OK—Level 6

Implementation: If I lost you reading the purpose of these (five) programs, then we're still together. Quite frankly, I'm not a math major (or math minor either!) and this is way over my head.

Suitability: Math students, scientists and anyone else who understands the terms used above can probably put this package to good use.

Other programs available from M and S Computer Software: A Dissassembler.

Vendor: Contract Services Associates, 1846 W. Broadway, Anaheim CA 92804

Name: Form 1040A Tax Program

Purpose: To help the user fill out the IRS 1040A income tax form

Documentation: Two pages—complete

Loading: OK—Level 7

Implementation: You are asked to enter from the keyboard the information that will be used to fill out the 1040A. If you qualify for earned income credit (income under $8000), this is computed. You are directed to the tax tables and asked to enter your tax. The information required on the form is then displayed on the screen.

Suitability: Since the form 1040A is so simple to fill out, it would be hard to justify the purchase of this program for a one-time use. There is no guarantee that the form will be the same next year or that you will qualify for it.

Other software from Contract Services Associates: All income tax forms and schedules (home and professional), Monitor, Calculator, Loan Payment Computation, Hex-Dec-Oct Conversions, Cash Flow Prediction and many more.

Vendor: Circle Enterprises, Inc., PO Box 546, Groton CT 06340

Name: File Handling

Purpose: To keep a file of names, addresses, telephone numbers and birthdays

Documentation: Self-documenting

Loading: OK—Level 7

Implementation: Program is self-documented and easy to use. Names (last name first) can be entered in any sequence and will be arranged in alphabetical order. Any listing can be recalled, changed or deleted, and the entire block—name, address, telephone number and birthday—will be displayed while it is being modified. You can step your way through the file or cause a list of all of the names and telephone numbers in the file to be displayed. No direct provision for hard copy is made, but this could easily be added.

Suitability: This is another one that I've put into family service. It will handle up to 100 names and should be usable by most households. It ought to make our Christmas card list much simpler to generate this year.

Other software available from Circle Enterprises, Inc.: Moving Signboard, Loan Payment, Prime Numbers, Amway Distributer System and more.

Conclusion

Note that most programs were loaded with the CTR-41 volume control set between 6 and 7. In order to get a good CLOAD for the first time, I used the following procedure:

10 Set the volume control to 4.
20 CLOAD.
30 If CLOAD fails THEN advance volume slightly:GOTO 20
40 RUN


Radio Shack has a modification out for the TRS-80 that uses the data on the tape instead of the computer clock for clocking the CLOAD. This should allow a much greater volume control setting range. I have another computer that uses that method, and I can set the volume anywhere from 1 to 10 and still get a good load.

When I CSAVE my own programs, they CLOAD best with the volume set at 4½. I don't like to have tapes that play back at different levels because I usually forget to reset the volume control correctly. Therefore, once I get a good CLOAD. I CSAVE the program back to a second tape. This means that from now on it will CLOAD from this tape with my standard volume setting. Also note that most programs only take up a portion of the tape that they are sold on, so I put many programs on this second tape, which reduces the number of active tapes in my library.

Most of the tapes that I received came without boxes. Since dust and error free digital tape recording are not compatible, I do not like to see cassette tapes lying around loose gathering dust. A box for each tape would be a small part of the vendor's program production expense and would certainly be a beneficial service to the customer.

I have barely scratched the surface of this field. While I was disappointed in some of the above software for the reasons given, I think that we have made a start in the right direction. However, I still think that there is a need for more sophisticated applications-type programming. Personal computing is growing up very rapidly. More and more people who are not interested in computers as a hobby are getting involved. They are going to demand and be willing to pay for good applications software. ■

WHY LOWERCASE?

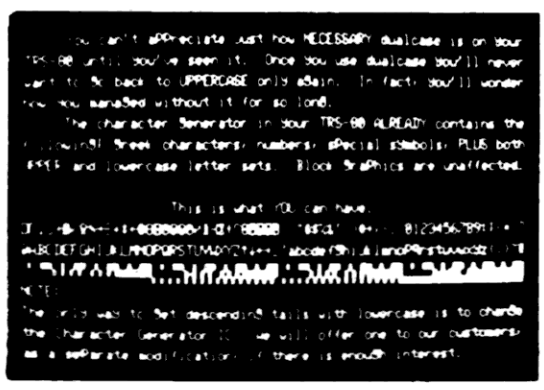

Wouldn't you like access to YOUR entire typeset? Level II Basic converts lowercase command words into UPPERCASE. All characters contained between quotes remain as typed, but the software in an unconverted TRS-80 allows UPPERCASE display only! This software shortcut allowed Tandy to omit one video memory chip. This chip must be added and the video software repaired before the display of dualcase is possible.

Unfortunately,

converting your TRS-80 requires installing the video memory chip plus wiring changes. There is only one modification on the market which eliminates most of the wiring. To get the dualcase mod installed you have three choices: 1) Send your computer to a company or individual who will do the wiring, 2) do it yourself, or 3) "THE PATCH" (trade mark).

To make choices 1 & 2 operate requires using software overhead in the form of a "driver". This takes 30 bytes, unless you want a "normal" shift to UPPERCASE keyboard. That takes upwards of 60 more bytes. Software oriented mods have three more disadvantages: 1) They reside in program memory, eating program space which you could be using, 2) other machine language programs are unusable if they are loaded against the top of memory, or 3) the "driver" software MUST be loaded every time you power-up, or the "MEMORY SIZE?" appears due to program bomb. Choice number three suffers from NONE of the software overhead problems. We call it "THE PATCH" and it's new for the 80's!

"THE PATCH", a small electronic module which plugs into the unused ROM socket on Level II machines, makes necessary software changes to ROM supporting lowercase, an optional block cursor, & extra keyboard debounce. Electronically means NO software overhead. Your computer displays lowercase instantly upon power-up, and the keyboard operates in "normal" typewriter fashion.

"THE PATCH" is completely compatible with your TRS-80 since it is the first, and only, TRS-80 lowercase system designed that flawlessly mates with the computer as a unit, not just a special program package.

"THE PATCH" is also the only modification of any kind which can have extra options and updates factory installed for 5 to 10 dollars per option, as they are available. Same day turnaround.

Order yours today to avoid extra delay. Send $69.97 + 2.50 for S&H to: CECDAT "THE PATCH" / Box 8963 / Moscow, ID 83843. (208) 883-0611

THE PATCH is a trademark of CECDAT, Inc. ✓195

SMALL SOFTWARE SYSTEM ✓30 PRODUCTS FOR THE TRS-80* SMALL SOFTWARE SYSTEM

NEW!

WHISTLER: HOME CONTROLLER INTERFACE - $34.95. New hardware product that controls lights, appliances, computer peripherals, darkroom timers and other 115 volt devices anywhere in your house! Software controlled by cassette cable. Use with Sears or BSR Home Control System with ultrasonic option. Assembled, tested, self-contained, and includes Basic software.

TRS-80 DISK & OTHER MYSTERIES - $22.95, H.C. Pennington. Best disk book we've seen! Directory secrets, file formats, damaged disk recovery, etc.

LEARNING LEVEL II - $15.95, D.A. Lien. Learn Level-2 like you did Level-1, step by step. Same author and style as Level-1 manual. Super new book!

UTILITIES

RSM-2: MACHINE LANGUAGE MONITOR FOR 16K TRS-80'S - $26.95
RSM-2D: THREE VERSIONS OF RSM-2 FOR DISK SYSTEMS - 29.95
RSM-2 RELOCATOR: PUT RSM-2/2D ANYWHERE IN MEMORY - 9.95

Machine Language monitors with Z-80 disassembler! HEX and ASCII memory dumps; EDIT, MOVE, EXCHANGE, VERIFY, FILL, ZERO, TEST, or SEARCH memory, read/write SYSTEM tapes, enter BREAKPOINTS, PRINT with TRS232 or Centronics, read/write disk sectors directly! RSM-2 tape loads at top of 16K LEVEL I or II; RSM-2D disk includes 3 versions for 16K, 32K and 48K.

DCV-1: CONVERT SYSTEM PROGRAMS TO DISK FILES -$9.95. Execute Adventure, Air Raid, RSL-1, ESP-1, T-BUG, etc. from disk, even if they interfere with TRSDOS! New version works with TRSDOS 2.3.

BASIC-1P: LEVEL-1 BASIC WITH PRINTING! - $19.95. Run any LEVEL-I BASIC program on your 16K Level-2. PLUS LPRINT and LLIST with our TRS232 or Centronics. Furnished on tape; can be used from disk.

MACHINE LANGUAGE GAMES

AIR RAID, BARRICADE or **RSL-1: - $10.00** each, all 3 for **$25.00**

AIR RAID: A super shooting gallery; our most popular game. Ground based missile launcher shoots high speed aircraft! Hours of fun!

BARRICADE: "BREAKOUT" for the TRS-80! Break through 5 walls with high-speed ball and keyboard controlled paddle! 96 different options!

RSL-1: Enter patterns with repeating keyboard! Save patterns on tape (4 furnished). Play John Conway's LIFE. FAST - about 1 second per generation!

SMALL SYSTEM SOFTWARE P. O. BOX 366 NEWBURY PARK, CA 91320

MODEL-II TRS-80*

CP/M" VERSION 2.0 FOR THE MODEL-II - $170.00. Latest version from Digital Research. Runs both single and double density disks! "Standard" version runs nearly any CP/M software, including Cobol, Fortran, C-Basic, M-Basic, business and accounting packages, etc. Hundreds of programs available!

RSM II: ENHANCED RSM MONITOR FOR THE MODEL-II - $39.95. Relocatable version of RSM-2D plus screen editor for modifying either memory or disk sectors in both Hex and ASCII, split screen scrolling, and formatted serial or parallel printing. Sold on self-booting disk; directions to save as TRSDOS file.

PROFESSIONAL SOFTWARE

THE ELECTRIC PENCIL FOR THE TRS-80: TAPE-$99.95, DISK-$150.00. Popular video editor for creating and saving text files. Prints formatted copy with right justification, page titling & numbering, etc. Upper case only, or lower case with modification. 16K Level-1 or 2 (tape).

CP/M" OPERATING SYSTEM FOR THE MODEL-I - $145.00. The 8080/Z80 "Software Bus for the Model-1 TRS-80. Includes TRS232 and RS-232-C software, lower-case support, debounce, DCV-2 and other unique utilities. Allows use of many available programs written for CP/M.

PRINTER SUPPORT

TRS232 PRINTER INTERFACE - $49.95 ($59.95 after June 30). Assembled & tested printer interface for RS232 or 20-mil current loop printers. Expansion interface not required. Print from Level-II BASIC, CP/M, BASIC-1P, ELECTRIC PENCIL, etc. Standard cassette software included. Add $2.00 for shipping.

TRS232 "FORMATTER" SOFTWARE PACKAGE - $14.95. Adds page and line length control, printer pause, "smart" line termination, etc. to TRS232.

RSM232: Adds RS-232-C capability to RSM-2/2D monitors - $9.95
PEN232: RS-232-C for cassette version Electric Pencil - 9.95
EDT232: TRS232 and RS-232-C for tape version of EDTASM - 9.95

OTHER PRODUCTS FOR THE TRS-80


ESP-1: $29.95. Assembler, Editor, Monitor (8080 mnemonics)
LST-1: 8.00. Listing of Level-1 BASIC with some comments

**CP/M tm Digital Research, Inc. *TRS-80 tm Tandy Corp.
See your dealer or order direct. Calif. Residents add 6% tax

SMALL SYSTEM SOFTWARE P. O. BOX 366 NEWBURY PARK, CA 91320

introducing...

MAYDAY™

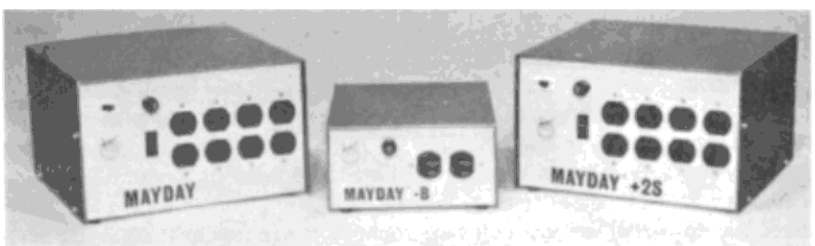

The Uninterruptable Power Supply that....


- Prevents loss of memory when power "blackouts" occur.
- Prevents loss of memory or disk I/O errors when "brownouts" occur.
- Provides time to continue operating complete system with disk drives to finish operations or store information.
- Will handle most mini/micro computers with power consumption up to 250 watts.
- Designed and developed using complete TRS-80 System.

Protect your Time and Investment

For price list and detailed specifications, contact your nearest Sun-Technology distributor or call direct to:

Sun - Technology, Inc. ✓151
Box 210
New Durham, New Hampshire 03855 **(603) 859-7110**
(Manufacturing high technology products since 1970)

— TRS-80 MODEL II USERS —



Preserve — Protect — Display

your equipment with

CRYSTAL CLEAR

PLASTIC COVERS

- Keyboard & CRT..... $24.95 ea.
- Line Printer III..... $14.95 ea.

plus $1.50 postage each
(Indiana residents add 4% sales tax)

Introductory Offer: Buy both covers & save

Combination price $34.95 including postage

Crown Plastic Co. ✓266
3746 N. College 317-925-5566
Indianapolis, IN 46225

If you bought your 80 to learn about computers, why upgrade to Level II?

Inside Level I

Robert V. Meushaw
4188 Brittany Dr.
Ellicott City, MD 21043

Once I had worked my way through the *TRS-80 Level I BASIC User's Manual* and had run most of the examples, I grew itchy to move on to Level II BASIC. My friends who already had Level II machines constantly reminded me of how primitive my system was. The pressure to move up kept growing.

I would have succumbed to the pressure, if I had not already gone through a similar experience in my younger days when I had been bitten by the stereo bug. I had spent thousands of dollars on speakers, amplifiers, tuners, turntables, etc., in an attempt to own the ultimate system. Clearly, it was an impossible task.

Looking back, I realized that my pretention overcame my better judgement. After all, the purpose of owning a stereo was to listen to music, not to claim the lowest distortion figures of any of your friends' systems.

My ears could have been satisfied with a much less expensive system.

I had to reevaluate my true motives for owning a computer. After several days of mulling it over, I realized I wanted to understand the underlying concepts of the machine. My true desire was to know the details of the Z-80 microprocessor, how the various software routines worked and how the Level I BASIC interpreter worked. There was so much more to learn on the system I already had. I had only scratched the surface of understanding the TRS-80.

```
10      I = 1
20      I = I + 1
30      IF I = 15000 THEN 50
40      GOTO 20
50      PRINT "DONE"
60      END
```

Listing 1: Timing loop using incremented variable (302 seconds).

```
10      FOR I = 1 TO 15000
20      NEXT I
30      PRINT "DONE"
40      END
```

Listing 2: Timing loop using FOR-NEXT statement (33 seconds).

```
10      FOR I = 1 TO 15000: NEXT I
20      PRINT "DONE"
30      END
```

Listing 3: Single line version of timing loop in Listing 2 (28 seconds).

```
10      FOR I = 1 TO 5000
20      **** BASIC STATEMENT ****
30      NEXT I
40      PRINT "DONE"
50      END
```

Listing 4: Program used to investigate timing behavior of various Level I BASIC statements.

Level I BASIC

What I needed was a more well-defined objective than just to "learn more about Level I." I decided to begin my investigation with Level I BASIC and attempt to learn any technique that allowed me to use the language more efficiently.

A simple timing experiment (Listing 1) opened my eyes. This is a very simple timing loop which increments the variable I from 1 to 15,000 and then prints "DONE".

There is nothing amazing about this program, but I was dumbfounded to find that it took 302 seconds to execute. In fact, I was so amazed that on the first several runs of the program, I terminated the execution prematurely because I thought the computer was broken.

Why on earth, considering the speed of modern day computers, should it take 302 seconds to count to 15,000? This was extemely puzzling, so for my second investigation I ran an equivalent program, shown in Listing 2. It took only 33 seconds.


Here was a problem worth investigating: Why should two equivalent programs differ in execution time by a factor of almost ten? More importantly: What can be done to obtain the fastest program execution time?

Out of curiosity, I tried to improve on the results of the program in Listing 2. Listing 3 shows a third program that executed in 28 seconds. This improvement was not as dramatic, but it still amounted to about a 15% increase in speed.

The DATA-TRANS 1000

A completely refurbished **IBM** Selectric Terminal with built-in **ASCII** Interface.

***FOR YOUR TRS-80 WITH OR WITHOUT EXPANSION INTERFACE.**

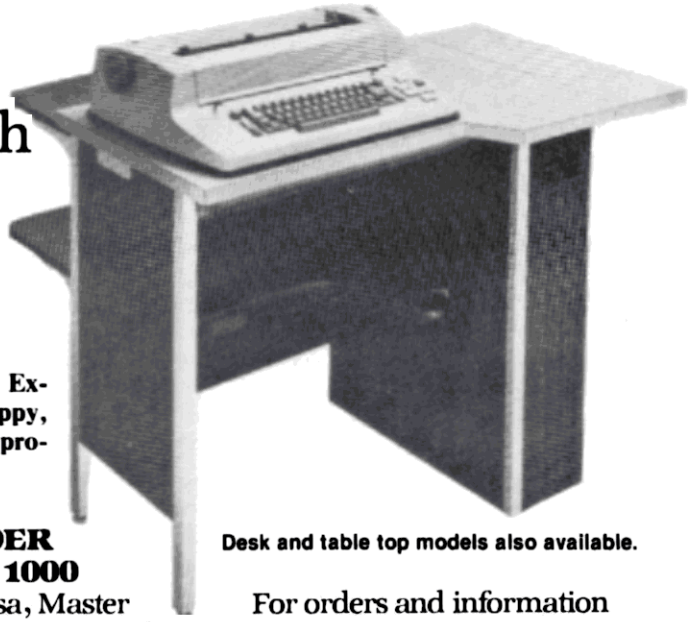

Desk and table top models also available.

Features:

- 300 Baud
- 14.9 characters per second printout
- Reliable heavy duty Selectric mechanism
- RS-232C Interface
- Documentation included
- 60 day warranty - parts and labor
- High quality Selectric printing Off-line use as typewriter
- Optional tractor feed available
- 15 inch carriage width

Also works with Exatron's Stringy Floppy, for fast loading of programs.

HOW TO ORDER DATA-TRANS 1000

1. We accept Visa, Master Charge. Make cashiers checks or personal check payable to:

DATA-TRANS

2. All orders are shipped F.O.B. San Jose, CA
3. Deliveries are immediate

For orders and information

DATA-TRANS
2154 O'Toole St. ✓274
Unit E
San Jose, CA 95131
Phone: (408) 448-0800

Hyperlight Patrol

The ultimate in space battle games

Real Time 3-D action ● Graphics & Sound ● Voice optional ● Projection map/ viewing screen.
Battle a smart alien fleet in this exciting deep space conflict simulation.

$19.95

On Disk, 48K only

Fantastic Software
3305 W. Spring Mt. Rd.
Suite 49 ✓224
Las Vegas NV 89102

New from

†SUMWARE†

CREATE SUPERIOR GRAPHICS & ANIMATION

Master Graphics Reference. Displays TRS-80 keyboard and graphics characters in all horizontal and vertical combinations. Thousands of shapes, screened 63 at a time. Or instantly access a specific group. People, animal, vehicle, symbol shapes you didn't believe were there. Ideal reference for animation, graphic ideas, symbology.

FLY, SHOOT, CHASE, TEE UP

Sumfun One. Eight great games in one extended program. Take off and land from "Carrier." Set "Chopper" down safely with engine out. Shoot 'em down in "Jet Attack." Net "Butterfly" in a wild chase. Play "Front 9" mini-golf. Hit "Fracshot"'s split-second target. All genuine challenges that sharpen your skill, hold your interest for hundreds of plays. Also "Dead Heat" (horse race), "Hotsy-Totsy" (number search) for family & party fun.

Programmed in BASIC for TRS-80 Lev. II, 16K. Double-load no rewind format. Top quality digital cassettes, double wide pads, stainless pins, nylon rollers, screw shells. Individually lab checked. Cased.

Each, **$16.50** Both, **$30.00**
If dissatisfied, return for full refund.
Florida residents add 4% sales tax.
Order today from

†SUMWARE†

Suite 406 • 537 S. Sequoia Drive
West Palm Beach, FL 33401 ✓217

THIS MONTH'S SPECIALS

SPECIAL #1

If you purchase the "TRS-80 DISK AND OTHER MYSTERIES" Book for the regular price of $22.50
you can buy 10 VERBATIM DISKETTES
AND a plastic library case for $22.00
TOTAL $44.50

***** FREE SHIPPING FOR ORDERS OVER $20.00 *****

SPECIAL #2

If you purchase APPARAT NEWDOS+
for the regular price of $99.95
you can buy 10 VERBATIM DISKETTES
AND a plastic library case for 5.00
TOTAL $104.95

•VERBATIM DISKETTES (or the best price you find minus — 50¢)	$26.50
•PLASTIC LIBRARY CASE	$2.50
•FLOPPY SAVER (reg. $14.95)	$11.95

• Send for a Free Catalog

ALL ORDERS SHIPPED SAME DAY VIA UPS

Alpha Byte Storage ✓69
4636 Park Granada
Suite 159
Calabasas, California 91302
(213) 883-8594

Clearly, for a given program, there could exist a large number of equivalent programs whose execution times might differ substantially. Unless each equivalent program was coded and tested, it might not be possible to determine *a priori* which would be fastest.

I had defined my project: Determine a set of guidelines which could be applied to an arbitrary program to improve its execution time.

The Approach

Since I had already obtained execution times for the FOR-NEXT loop shown in Listing 2, it was a simple matter to add statements in the loop as shown in Listing 4 and measure the total time of execution. The extra time for execution beyond that required by the FOR-NEXT loop would be directly attributable to the extra statement in the loop.

For example, if the timing loop of Listing 2 required 48 seconds to execute its 15,000 iterations after a statement was added, then the additional time required because of that statement would be 48 minus 33 = 15 seconds. If the time per execution of that statement was computed, it would be 15/15,000 = .001 seconds.

In practice, the delay loop which I used performed 5000 iterations because it did not result in excessive execution times.

Firstly, I attempted to categorize the kinds of Level I BASIC statements including:

Assignment Statements;

Arithmetical Statements;

Logical Assignment Statements;

Single Parameter Statements;

Two Parameter Statements;

Transfer of Control Statements;

Conditional Statements;

I/O Statements.

Within each statement category, I included various forms of each statement in order to test the effect of the variations. While the list is not exhaustive, it's sufficient to gain an understanding of the overall operation of Level I BASIC.

The Assignment Statement

Table 1 shows the execution times of the assignment statement variations. The various forms included the assignment of constants, variables, array elements and strings to real variables, string variables and array element variables.

For example, the first two results show that it requires more time to assign a constant to the variable K than to assign the value of X to K.

The next two lines show that it requires less time to assign K the value of a variable array element, i.e. A(X), than to assign it the value of a particular array element, i.e. A(7).

Comparing these results with the previous results shows that it requires more time to assign W the value of an array element than a non-array element. For instance, in going from K = A(8) to K = X, we can cut the execution time by 41%.

The next three lines show the considerable savings that result from using the optional assignment statement LET. Going from K = A(8) to LET K = X we can cut execution time by over 65%.

The next series of statements shows the results of assigning values to array elements. As you see, the fastest executing statement uses only variables and the LET statement (i.e., LET A(I) = X), and the slowest uses constant parameters without the LET statement (i.e., A(8) = 7).

Finally, the limited string assignment capabilities of Level I are evaluated in the last two statements. As expected, the use of the LET statement results in a considerable savings in time.

Aside from comparing relative speeds it is interesting to examine the absolute times required to execute assignment statements.

It takes approximately 10 ms. to execute these assignment statements. If you approximate the machine instruction execution time of the microprocessor as 6 microseconds, it would appear that as many as 1500 machine instructions are executed in carrying out one BASIC assignment statement.

These crude approximations can give some insight into the relative inefficiency of an interpreted language as compared to a machine code implementation of the same operation.

Arithmetical Statements

Since so many programs involve arithmetic functions, the results of Table 2 are particularly interesting. The left column of the table shows the expressions evaluated in the timing loop described previously.

Each expression is written in a general form using ? to stand for one of the functions +, −, /, or *, shown at the top of the table. All the functions have relatively close execution times. Addition and subtraction, for example, have nearly identical execution times. The next fastest function is multiplication, and division is the slowest function.

Comparing execution times in each column, we get similar results to those previously obtained. For a given expression, approximately 24 percent more time is required if parentheses are used, and approximately 26 percent less time is required if the LET statement is used. Additionally, substitution of variables for constants improves execution speed. For instance, A = I + J is 24 percent faster than using A = 5 + 5.

Logical Assignment Statements

Often programs require the use of Boolean variables, or variables which take only two values, usually 0 and 1.

Table 3 shows some examples of statements which compute the value of a Boolean variable. The first statement assigns A the value of 1 if (B = C) and 0 otherwise. The second

Assignment Statements

	BASIC Statement	Execution Time (Sec.)
	K = 5	.007
	K = X	.0058
	K = A(5)	.0098
	K = A(X)	.0086
LET	K = 5	.0046
LET	K = X	.0034
LET	K = A(X)	.0062
	A(5) = 5	.0108
	A(I) = 5	.0096
	A(5) = X	.0096
	A(I) = X	.0084
LET	A(I) = X	.006
	A$ = "ABCD"	.0042
LET	A$ = "ABCD"	.0018

Table 1: Execution times for Level I BASIC Assignment Statements.

Logical Assignment Statements

	A = (B = C)	.011
	A = B = C	.0086
LET	A = B = C	.0062
	A = B>C	.0085
	A = B< = C	.0085

Table 3: Logical Assignment Statement Execution Times.

Arithmetical Statements


		+	−	*	/
	A = 5?5	.01	.01	.011	.0118
	A = I?5	.009	.009	.01	.0104
	A = I?J	.0076	.008	.0088	.0092
	A = (5?5)	.0124	.0124	.0134	.0142
	A = (I?5)	.0114	.0114	.0124	.0128
	A = (I?J)	.01	.0104	.0112	.0116
LET	A = 5?5	.0074	.0074	.0084	.0092
LET	A = I?5	.0066	.0066	.0074	.0078
LET	A = I?J	.005	.0054	.0062	.0068

Table 2: Arithmetical Statement Execution Times for Level I BASIC.

CIRCUIT BREAKER PRICE SLASHING

16K MEMORY UPGRADE KITS — $59
for TRS-80*, Apple II, Sorcerer (specify)

PRINTERS



NEC Spinwriter
Letter Quality High Speed Printer
Includes TRS-80* interface software, quick change print fonts, 55 cps, bidirectional, high resolution plotting, graphing, proportional spacing — $2998
With Tractor Feed — $3198

DIABLO 1650 — Letter Quality High Speed Printer
Prints at 40 cps, using 88, 92 or 96 char. Metalized printwheels. Vertical resolution 1/48"; Horizontal 1/120". Capable of proportional spacing, bidirectional printing, and graphics under software control. Bidirectional normal and direct tabs. Left, right, top and bottom margins. Friction and tractor feed. — R.O. $2890, KSR $3285

779 CENTRONICS TRACTOR FEED PRINTER — $969
Same as Radio Shack line printer

737 CENTRONICS FRICTION & PIN FEED PRINTER — $849
Text quality matrix, proportional spacing

730 CENTRONICS FRICTION & PIN FEED PRINTER — $639
7 x 7 matrix

P1 CENTRONICS PRINTER — $339
Same as Radio Shack quick printer


PAPER TIGER (IP440) — $949
Includes 2K buffer and graphics option

TI-810
Parallel and serial w/ TRS-80* interface software — $1575
with upper and lower case and paper tray — $1665

OKIDATA Microline 80 Friction and pin feed — $795
Tractor Feed, friction, and pin feed — $920

EATON LRC 7000 + 64 columns, plain paper — $349

LEEDEX MONITOR Video 100 — $135



DISK DRIVES — $299
More capacity than Radio Shack 35 Track (80 K Bytes) drives. Fully assembled and tested. Ready to plug-in and run the moment you receive it. Can be intermixed with each other and Radio Shack drive on same cable. TRS-80* compatible silver enclosure.

90 DAY WARRANTY. ONE YEAR ON POWER SUPPLY.

FOR TRS-80*

CCI-100	5¼", 40 Track (102K Bytes) for Model I	**$299**
CCI-200	5¼", 77 Track (197K Bytes) for Model I	**$549**
CCI-800	8" Drive for Model II (½ Meg Bytes)	**$795**
For Zenith Z89		
CCI-189	5¼", 40 Track (102K Bytes) add-on drive	**$394**
Z-87	Dual 5¼" add-on drive system	**$1095**

DISKETTES — Box of 10 (5¼") — $24.95
— 8" double density for Model II (Box of 10) — $36.49

DISK OPERATING SYSTEMS

PATCHPAK #4 by Percom Data		$ 8.95
NEWDOS Plus — with over 200 modifications and corrections to TRS-DOS	35 Track	$ 89.00
	40 Track	$ 99.00
CP/M for Model I, Zenith		$145.00
CP/M for Model II, Altos		$170.00

COMPLETE SYSTEMS

TRS-80* LEVEL II-16K with keypad — $699
TRS-80* Expansion Interface — $249
ZENITH Z89 ,16K expands to 48K, all-in-one computer — $1949
ZENITH Z19 — $740
ATARI 400 $524 **ATARI 800 $849**
MATTEL INTELLIVISION — $249
TI 99/4 — $979
NORTH STAR **apple** — Call for prices

CAT MODEM Originate and answer same as Radio Shack Telephone Interface II — $157.50

SOFTWARE FOR THE TRS-80*

SBSG
Free enhancements and upgrades to registered owners for the cost of media and mailing. 30-day free telephone support from vendor. User references supplied upon request. SBSG maintains a time-sharing computer where you can dial-up and leave your problems, 24 hours, 7 days a week.

KVP: Allows use of serial printer with TRS-80*. Lower case. Keyboard debounce. Direct entry of graphics and control characters from the keyboard. **$29.95**

Fully Interactive Accounting Package: Requires 2, 3, or 4 drives. Includes General Ledger, Accounts Payable, Accounts Receivable, and Payroll. Report generating. Well documented and fully tested by accountants.
Complete Package: **$389.00**
Individual Modules: **$99**

A/P, A/R, G/L, Payroll for Model II
Individual Modules: **$129**

Inventory II: Requires 2 or 3 drives. Handles up to 1000 items per disk drive. Reports include complete activity, inventory, listing, and minimum quantity search. **$95.00**

Mailing List Name & Address II System: Requires 2 drives. Use with Electric Pencil files for automatic insertion of name, address and greetings in letters. Has ability to print envelopes. Menu driven. Includes enter, delete, update, search, extract, merge and print. Up to 1250 names per diskette. Will sort up to 600 names in 7 minutes. 40 page manual. Zip code sort is excellent for bulk mail applications. **$99.00**

Intelligent Terminal System SI-80 III: Enables a TRS-80* to act as a dial-up terminal on any standard time sharing network. Provides a TRS-80* with control key, ESC Key, Repeat Key, Rub Out Key, Break Key, full upper and lower case support, selectable printer output and program selectable transmission rates. **$149.00**

Stock and Bond Portfolio Management System: Designed for the stock investor to track individual buys and sells of assets and to examine the total buy/sell portfolio with a minimum of time and effort. Supports up to 999 clients, 500 assets and 3,000 outstanding transactions. This system has the advantage of maintaining all open information on file by specific transaction. Both YTD Unit and $ amount of purchase/sales are summarized for each client in the Client Master. Current total stock levels for each stock is available in the Asset Master. **$189.00**

Client Billing System: Designed for CPA and law firms to track time and activities (or services) performed for clients. Supports up to 999 clients, 99 employees, 99 pre-coded activities and 3000 outstanding transactions. This system has the advantage of maintaining all information on file by specific transaction. Available information include personnel/expense reports for each client, YTD hours and $ amount for clients, employees and activities, reports of employee in-house activities, and work-in-progress summaries. **$299.00**

File Management System: For specialized storage needs. Sorts files in ascending or descending order on 3 separate fields. Scanable. Some applications have been fixed assets, phone numbers, names, slides, albums. Selectively totals numeric and dollar fields. Display and print capability. **$49.00**

S&M SYSTEMS
INSEQ-80™ - Indexed Sequential Access Method **(ISAM)** for the TRS-80* Model I. Four machine language programs that can be called from your BASIC program via USR functions to access records either sequentially or randomly. The INSEQ-80 programs maintain all indexes and chains for you. Includes reorganization utility to consolidate files. **$49.95.**

CP/M BASED SOFTWARE for Zenith, Altos, Radio Shack
Software w/Manual / Manual Alone

DIGITAL RESEARCH
MAC - 8080 Macro Assembler. Full Intel macro definitions. Pseudo Ops include RPC, IRP, REPT, TITLE, PAGE and MACLIB. Z80 library included. Produces intel absolute hex output plus symbols file for use by SID (see below). **$120/$15**

SID - 8080 Symbolic debugger. Full trace, pass count and break-point program testing system with back-trace and histogram utilities. When used with MAC, provides full symbolic display of memory labels and equated values. **$105/$15**

ZSID - As above for Z80. Requires Z80 CPU. **$130/$25**

TEX - Text formatter to create paginated, page-numbered and justified copy from source text files, directable to disk or printer. **$105/$15**

DESPOOL - Program to permit simultaneous printing of data from disk while user executes another program from the console. **$80/$5**

MICROSOFT
Basic-80: Disk Extended BASIC, ANSI compatible with long variable names, WHILE/WEND, chaining, variable length file records. **$300/$25**

Basic Compiler: Language compatible with BASIC-80 and 3-10 times faster execution. Produces standard Microsoft relocatable binary output. Includes MACRO-80. Also linkable to FORTRAN-80 or COBOL-80 code modules. **$350/$25**

MICROPRO
WORD-STAR: Menu driven visual word processing system for use with standard terminals. Text formatting performed on screen. Facilities for text paginate, page number, justify, center and underscore. User can print one document while simultaneously editing a second. Edit facilities include global search and replace. Read/Write to other text files, block move, etc. Requires CRT terminal with addressable cursor positioning. **$445/$40**

S&M SYSTEMS
Fully Interactive Accounting Package: Includes General Ledger, Accounts Payable, Accounts Receivable, and Payroll. Individual Modules. **$99/$15**
Inventory: $125/$20

CCI
TELNET Version 5: Comprehensive intelligent terminal program. Supports numerous teleprocessing protocols. Reads and stores teleprocessing data on disk. **$75/$15**

ACCESSORIES

HEAD CLEANING DISKETTE: Cleans drive Read/Write head in 30 seconds. Diskette absorbs loose oxide particles, fingerprints, and other foreign particles that might hinder the performance of the drive head. Lasts at least 3 months with daily use. Specify 5¼" or 8". **$20 ea/$45 for 3**

FLOPPY SAVER: Protection for center holes of 5¼" floppy disks. Only 1 needed per diskette. Kit contains centering post, pressure tool, tough 7-mil mylar reinforcing rings. Installation tools and rings for 25 diskettes. **$14.95**
Re-orders of rings only: **$7.95**

Send for FREE Catalogue

The CPU SHOP
✓298

TO ORDER CALL TOLL FREE 1-800-343-6522
Massachusetts residents call **(617) 242-3361**
For detailed technical information, call 617/242-3350
Hours: 10AM-6PM (EST) M-F (Sat. till 5)
*TRS-80 is a Tandy Corporation Trademark

5 Dexter Row, Dept. K6M
Charlestown, Massachusetts 02129

Massachusetts residents add 5% sales tax

Quantities on some items are limited

VISA*

master charge

Single Parameter Statements

	K = RND(66)	.0134	
	K = RND(X)	.012	
LET	K = RND(X)	.0096	
	K = RND(30000)	.014	
	K = RND(0)	.0098	
	K = RND(J)	.0088	where J = 0
LET	K = RND(0)	.0072	
	K = INT(5)	.0096	
	K = INT(X)	.0084	
LET	K = INT(X)	.006	
	K = ABS(5)	.0086	
	K = ABS(X)	.0074	
LET	K = ABS(X)	.005	

Table 4: Single parameter statement execution times.

statement may look somewhat strange, but it is equivalent to the first and it executes 22 percent faster.

This is another example of the execution time penalty incurred when unnecessary parentheses are used. As expected, the use of the LET statement provides a significant decrease in execution time over the first statement. In this case the decrease amounts to 44 percent.

The last two statements show that there is no substantial difference in execution time when using logical tests such as "greater than," "less than or equal," etc.

On the average, the logical assignment statements are noticeably slower than the addition/subtraction statements, which surprised me. This may indicate that arithmetical statements can be used in place of logical statements in cases where execution time is critical.

Two Parameter Statements

	SET(30,47)	.0112
	SET(X,Y)	.008
	REST(30,47)	.0098
	RESET(X,Y)	.0066
	K = POINT(30,47)	.0146
	K = POINT(X,Y)	.0114
LET	K = POINT(X,Y)	.009

Table 5. Two-parameter statement execution times.

Single Parameter Statements

Level I BASIC includes the single parameter functions RND, INT, and ABS, which are shown in various forms in Table 4. The examples given for all of these functions show a modest increase in speed when using a variable rather than a constant parameter.

The speed increase ranges from 10.5 percent for the RND function to 14 percent for the ABS function. A LET statement increases the speed more dramatically. This increase ranges from 28 percent for the RND function to 42 percent for the ABS function.

In Level I BASIC when RND(0) is used, a random number between 0 and 1 is generated. This particular function executes considerably faster than when the RND function is used with a non-zero constant parameter or even a non-zero variable parameter.

The fastest execution of RND results when a variable whose value is 0 is used as a parameter. It is interesting to note that the execution times of the ABS and INT functions are on a par with the addition/subtraction assignment statements shown in Table 2. However, the RND function appears considerably slower than even the division statements shown in that table.

Two Parameter Statements

There are three statements in Level I BASIC which require two parameters. These statements, summarized in Table 5, are all associated with the TRS-80 graphics.

The SET statement is used to turn on a particular point in the 128 by 48 point display, while RESET is used to turn off a particular point. POINT is a Boolean function used to determine whether or not a particular point is turned on.

As expected, each of these statements executes faster when using variable parameters rather than constants or other expressions. Oddly enough, it requires considerably more time to turn on a point than to turn it off, despite the fact that the instruction set of the Z-80 microprocessor allows a particular bit in memory to be set to 1 as quickly as it can be set to 0.

The POINT statement is the slowest of the graphics instructions, even when it employs a LET statement. Unfortunately, the LET statement cannot be used to increase the speed of the SET or RESET statements.

It is possible to determine the approximate time required to turn on or off every point in the display, using the figures in Table 5 and the fact that there are 128 x 48 = 6144 individual points in the display. The time required to turn on 6144 points is approximately 49 seconds, while the time required to turn them off is 41 seconds. But this does not include the time required by the necessary FOR-

```
10    FOR I = 1 TO 5000
20    GOTO 30
30    NEXT I
```

Listing 5a: Program used to test GOTO statement.

```
10    FOR I = 1 TO 5000
20    GOSUB 100
30    NEXT I
100   RETURN
```

Listing 5b: Program used to test GOSUB/RETURN statements.

```
10    FOR I = 1 TO 5000
20    GOTO 100
30    NEXT I
100   GOTO 30
```

Listing 5c: Program used to compare GOTO statement with GOSUB/RETURN statements.

is HARD COPY STORAGE a problem?



The year's half over and your copies of *80 Microcomputing* are still lying around in messy piles or worse! Straighten out the situation with *80 Microcomputing* Library Shelf Boxes . . . sturdy, corrugated, white, dirt-resistant boxes will keep your issues of *80 Microcomputing* orderly and available for constant reference. Self-sticking labels are available for the boxes, too, not only for *80* but also for *Kilobaud/Microcomputing, 73 Magazine, CQ, QST, Ham Radio, Personal Computing, Interface Age, Byte* and *Radio Electronics*. Ask for whichever labels you want with your box order. Each box holds a full year of the above magazines. Your magazine library is your prime reference. Keep it handy and keep it neat with these strong library shelf boxes. One box (BX1000) is $2.00, 2-7 boxes (BX1001) are $1.50 each, and 8 or more boxes (BX1002) are $1.25 each. Be sure to specify which labels we should send. Shipping and handling charges are $1.00 per order. Call in your credit card orders on our toll free line 800-258-5473, or use the order card in the back of the magazine and mail to:

80 microcomputing T.M. Peterborough, NH 03458

Please allow 4-6 weeks for delivery. No COD orders accepted

NEXT loops. Using the results of Table 1 to approximate the loop time necessary for 6144 iterations adds about 14 seconds to the total, giving us 63 seconds to turn on all the points and 55 seconds to turn them all off.

Transfer of Control Statements

Measuring the execution speed of a transfer of control statement required a slightly different approach.

The GOTO statement required a number to which control could be passed. The GOSUB statement required not only a control number, but a RETURN of control to the statement after the GOSUB.

The particular routines which I used to test these statements are shown in Listings 5a, 5b and 5c. Listing 5a allows the GOTO statement to transfer control to the NEXT statement of the timing loop. Listing 5b was used to test the GOSUB/RETURN statements. Listing 5c was used to compare the transfer of control to a routine using only GOTO statements with that required by the GOSUB/RETURN statements.

The results are given in Table 6. Interpreting them is not as clear cut as in the previous cases. To execute a given routine using only GOTO statements is faster, but this routine is not as flexible as one that uses GOSUB/RETURN statements, especially in the return of control to the calling routine.

There may be occasions when you can use the increased speed of the GOTO to your advantage. In comparison, the transfer of control using only GOTO statements is approximately 14 percent faster than using GOSUB/RETURN.

A similar savings should be gained by using the ON N GOTO rather than the ON N GOSUB statement. Of course, the entire overhead associated with the transfer of control can be avoided, at the expense of a longer program, by including the subroutine as in-line code.

Unfortunately, in Level I BASIC you cannot use a variable name in place of a line number in the transfer of control statements (e.g. GOTO K), so this trick does not reduce execution time.

Conditional Statements

Level I BASIC includes only the IF-THEN conditional statement. At first glance, it does not appear that there is much you can do to improve its operating characteristics.

I found, however, that in some cases the THEN portion of the statement is unnecessary. In an expression such as IF X=1 THEN 100, where control is passed to line number 100, THEN is required, but for conditional assignment statements, etc., it's simply not.

The execution times in Table 7 indicate that there is no penalty in speed for omitting the THEN statement, so this is a four byte savings which is always worth taking.

The execution speed of the conditional statement depends heavily upon whether or not the condition tested is true or false. By comparing the third and

Transfer of Control Statements

GOSUB –	GOSUB 100 100 RETURN	.0072
GOTO –	GOTO 30 30 NEXT I	.0026
	GOTO 100 30 NEXT I 100 GOTO 30	.0062
ON N GOSUB	ON N GOSUB 100 100 RETURN	.0092
ON N GOTO	ON N GOTO 30 30 NEXT I	.0052

Table 6. Execution times for the transfer of control statements.





on computers, peripherals, software and other Radio Shack® products.

Pan American Electronics, Inc. A **Radio Shack®** Authorized Sales Center

1117 CONWAY MISSION, TEXAS 78572

Toll Free Order Number 800/531-7466
Texas & Main No. 512/581-2765 64

VISA

NO TAXES collected on out-of-state shipments.
FREE delivery available on minimum orders.
WARRANTIES honored by Radio Shack®.

master charge

Reader Service – see page 162

Conditional Statements (The following execution times are measured with J = 1)	
IF J = 1 THEN X = 1	.0142
IF J = 1 X = 1	.0142
IF J = 1 LET X = 1	.0114
IF J = 2 THEN X = 1	.007
IF J = 2 X = 1	.007

Table 7: Execution times for conditional statements.

fourth statements in Table 7, you can see that when the test fails, its execution speed is increased by a minimum of about 40 percent.

This means that, where feasible, conditional statements should be constructed to allow for failure of the condition tested. It is probably safest to time your program with conditionals that usually test true, and again with conditionals that usually test false, in order to determine which approach is fastest.

I/O Statements

Because of the limitless number of ways in which strings, variables, TABs, ATs, constants, etc., can be combined in an I/O statement, it is a large field to test. I limited my survey to a few combinations which provide insight into possible areas of saving. These are shown in Table 8.

The first eleven statements are examples of PRINT statements. The results seem inconclusive, except to say that using a variable parameter in an AT statement is faster than using a constant. It also appears that suppressing the carriage return in a PRINT statement, ending it with a ";", saves time.

After further consideration, it seems to me that the execution speed of the PRINT statement is not really significant because it makes no sense to print huge amounts of data—the display screen only holds 1024 characters. Execution speed is important only in the internal computation that occurs before a print statement.

The data entry statements available in Level I BASIC are the INPUT and READ statements. The INPUT statement, of course, requires manual intervention to supply the data. But the READ statement, since it can execute continuously in a timing loop, is measurable.

It was necessary for me to include a RESTORE statement with the READ statement in the timing loop, since I didn't want to type a DATA statement with 5000 entries, even if I did have sufficient memory to hold it. I determined the execution time for a single READ operation by independently finding the execution time of the RESTORE statement and subtracting this from the combined READ/RESTORE execution time. These results are also displayed in Table 8.

Some interesting tradeoffs are available when using READ/RESTORE statements. For example, if a sequence of numbers is referenced frequently in a program loop, the numbers can be referenced either as array elements or by READ/RESTORE statements.

The DATA statement is not normally considered executable, but it does require time to determine that it isn't an executable statement. When placed in the FOR-NEXT timing loop, I measured an "execution" time of .003 seconds. This time did not vary appreciably with the number of items in the statement.

I arbitrarily included the CLS, or clear screen, statement in Table 8. This is the slowest executing statement in all of Level I BASIC. I didn't know why, so I explored it in more detail.

By consulting a Z-80 microprocessor reference card, I developed an assembly language routine which cleared the screen (Listing 6). It first loads the HL register with the start address of the display memory (i.e., 3C00 hex) and then stores a blank at that location (i.e., 20 hex).

Next, the DE register is loaded with the address of the second display location address (i.e., 3C01 hex). Then the BC register is loaded with the number of bytes to be moved in the following "block move" instruction. The effect of the "block move" is to clear the screen.

Each instruction in Listing 6 is accompanied by the number of "T cycles" it requires, where a "T cycle" corresponds to the machine clock period. The total time required by this routine is shown beneath the listing.

The number 1023 in the calculations is the number of bytes moved in the block move, and the number 1.8 x 10**6 is the approximate clock speed of the TRS-80. The total time required by the assembly language program is approximately .012 seconds, just under one-half of the time required by the CLS statement.

Input/Output Statements		
PRINT	PRINT	.0172
	PRINT " "	.0184
	PRINT " ";	.0042
	PRINT " (64 spaces) "	.0278
	PRINT " (64 spaces) ";	.027
	PRINT AT 0, " "	.0098
	PRINT AT 0, " ";	.0086
	PRINT AT N, " ";	.0072
	PRINT AT 0, " (64 spaces)"	.0178
	PRINT AT 0, "(64 spaces)";	.0178
	PRINT TAB(10); " ";	.0088
INPUT	Not measured	
READ/RESTORE	READ X RESTORE	.012
	RESTORE	.0022
(from above we can compute)	READ X	.0098
DATA	DATA (.. 20 ITEMS ..)	.003
CLS	CLS	.0262

Table 8: Execution times for various I/O statements.

Compound Statements	
K = INT(A(X))	.0074
K = ABS(X + Y)	.0094
K = ABS(A(X))	.0114
K = INT(X)	.0084
K = INT(X + Y)	.0104
K = INT(A(X))	.0114

Table 9: Execution times for various compound statements.

Compound Statements

After determining the execution times of various Level I statements, I decided to examine their behavior when they were combined. Table 9 shows the execution times of the ABS and INT statements used with different parameters. In both cases, the fastest execution time results when a simple variable is used as a parameter, which is not surprising.

It occurred to me that by decomposing them into several simpler statements, I might

```
                Instruction          Number of T cycles
LD          HL,3C00H                 10
LD          (HL),20H                 10
LD          DE,3C01H                 10
LD          BC,3FFH                  10
LDIR                                 21
Total T cycles = 10 + 10 + 10 + 10 + 1023*21
               = 40 + 21483
               = 21523

One T cycle = 1/(1.8 * 10**6) sec.
Total time = 21523/(1.8 * 10**6)
           = .0119
           = .012 sec.
```

Listing 6: Assembly language program to perform CLS (clear screen).

LYNX makes your TRS-80 a whole new animal.



LYNX isn't just a telephone coupler.

LYNX is a one-piece total telephone linkage system for TRS-80 Level I and II computers. It contains all the functions you need to tap The Source. Engage your business computer. Play games with a computer friend. Or do nearly anything you wish.

Best of all . . . LYNX costs only $239.95*. A mere fraction of what you used to have to pay for equipment to do the same job.

LYNX. To get your paws on one, call or write:

ESI EMTROL SYSTEMS, INC. ✓278
1262 LOOP ROAD LANCASTER, PENNSYLVANIA 17601
Phone 717/291-1116
VISA or Master Card Welcome

*Add $2.50 for shipping and handling.
PA residents add 6% sales tax.
Includes "Terminal" program on cassette, instruction manual

TRS-80 is a trademark of the Radio Shack Division of Tandy Corporation

BRING YOUR TRS-80 KEYBOARD TO LIFE!

More than a year ago we used this headline to introduce AUTOK and QEDIT, the keyboard autorepeat and quick edit utilities for Level II BASIC. They've been very popular, but we couldn't resist working them over anyway, in response to customer suggestions. The result? **KEYEDIT**, a vastly improved AUTOK, QEDIT, and a few things more.

With **KEYEDIT** and your Level II or Disk BASIC system, you get:

- Debouncing. No need to use Radio Shack's KBFIX!
- Autorepeat on every key. Just hold a key down, and after a half-second delay, the character repeats about eight per second.
- Single-keystroke keyword entry. Hold down SHIFT, hit a letter key, and an entire BASIC keyword is spelled out at once. Plus, you can assign any keyword to any key!
- Keyboard macro facility. Any frequently-typed pattern can be defined and later invoked in a single keystroke. You just fill in the blanks. Takes the drudgery out of repetitive keying.
- Screen-oriented editing. **KEYEDIT**'s cursor moves anywhere in a displayed program listing for instant insertions and deletions. Plus, whole statements can be copied to other parts of the program or combined to form longer ones, without retyping the text. Makes BASIC's EDIT function obsolete!
- Easy loading. **KEYEDIT** loads from cassette using CLOAD (even though it's written in machine language), and may be saved on disk. Features can be deleted selectively just by deleting lines. Once RUN, **KEYEDIT** protects itself in memory and links into BASIC, where it unobtrusively awaits your command.
- Thorough documentation. Each feature is explained in detail along with instructions for user modifications.

KEYEDIT will save you hours of effort in BASIC program development. So why waste another minute? Bring your keyboard to life today with **KEYEDIT!**

KEYEDIT Level II cassette and instructions: **$19**

DISCOVERY BAY SOFTWARE CO.
P.O. Box 464 Port Townsend, WA 98368
Bankcards welcome. Dealer inquiries invited.
Write us directly for more information.

"HISPED"

TAPE OPERATION

2K Baud *PLUS* for the TRS-80™

- *Save, verify and load* **programs** up to 4 times faster than normal
- Save, verify and load array **data** up to 30 times faster than PRINT#
- User variable hardcopy formatting (3 output routines work with most printers)
- "HISPED" is a machine language program (not a hardware add-on)
- 2 copies plus a **free basic test program** supplied on high quality cassette—for level 2, 16K, 32K or 48K.

Write for full specifications or send $24.95 (ck or mo) + $1.00 P/H (Calif. residents add 6% sales tax)

PALOMAR SOFTWARE
170 S. Palomar Dr.
Redwood City, Ca. 94062
✓228

"TRS-80 is a registered trademark of TANDY CORP."

SPECIALSPECIAL**
TRS-80 ADD ON DRIVES
IMMEDIATE DELIVERY

SINGLE SIDED $225.00
DOUBLE SIDED $345.00

COMPLETE SYSTEMS
SINGLE SIDED $365.00
DOUBLE SIDED $485.00
INCLUDES:
MINI DISK DRIVE
FUSED POWER SUPPLY
VENTED CABINET
CABLE
90 DAY WARRANTY
FACTORY ASSEMBLED
FACTORY TESTED

THESE ARE NEW 5" FD's

I2 INTERFACE, INC ✓246
20932 CANTARA ST
CANOGA PARK, CA 91304
(213) 341-7914
VISA AND MASTER CHARGE ACCEPTED

✓Reader Service—see page 162

K = ABS(X + Y)	.0094	K = X + Y	.0076
		L = ABS(K)	.0074
			.015 total
K = ABS((A(X)))	.0114	K = A(X)	.0086
		L = ABS(K)	.0074
			.016 total
LET K = ABS(X + Y)	.007	LET K = X + Y	.005
		LET L = ABS(K)	.005
			.01 total

Table 10: Execution time comparison of compound and decomposed statements.

reduce their execution time. Table 10 gives three examples. In each of the cases, a single compound statement is replaced by two simpler statements that produce the same result. As the execution times clearly show, using a single compound statement is considerably faster than using two simpler statements.

While it is not fair to say that this will always be the case, it is certainly something that you should investigate when developing your programs.

BASIC Variations

As a final project in my investigation of Level I BASIC, I decided to examine the behavior of the language when used in ways not documented in the *Level I User's Manual*. It often turns out that there are quirks in a language, which you can use to your advantage if you can find them.

The first statement I looked at was the FOR statement. A typical form of this statement is:

```
FOR I = 1 TO 100 STEP 2
```

In this example, the start index, end index and step size are all numbers. I wanted to know what would happen if I used something other than a number, and I was pleased to discover that I could replace any or all of these numbers with either variables or expressions.

For example, the following statements will execute properly:

```
FOR I = A TO B STEP C

FOR I = A + 3 TO ABS(K/4) STEP RND(5)
```

This is very useful in programming situations. One example is a general purpose subroutine that can be called and supplied with the particular parameters to be used in its loop calculation. The use of variables or logical expressions can be extended considerably beyond what is described in the manual. It is possible to use logical expressions to define Boolean variables such as:

```
X = (A> = 5) * (B< = 7)
```

It is also possible to use "mixed mode" expressions, or expressions in which logical tests are used with other variables. For instance:

```
SET( (X>Y)*32 + 2, 42)
```

is a valid expression.

In the expressions ON K GOTO and ON K GOSUB, I found that if K is a negative integer the expression will not work. However, if K is zero, or if K is a positive integer greater than the number of parameters in the expression, the first parameter will be selected. For example, in the expression:

```
ON K GOTO 100,200,300
```

if K is zero or if K is greater than three, the statement will transfer control to line number 100. I tried a sample program which includes multiple statements on the same line as a conditional test. The program line I selected was:

```
IF X = * THIN A = 0: B = 1: C = 2
```

In running the program with several values for X, I found that if the test evaluations were true, all the remaining statements on the line were executed; while if the test evaluations were false, all the remaining statements on the line were skipped.

This might be very bothersome, but it can be useful in programs that require multiple actions after some decision. Many interesting variations of program statements are possible as a result of this feature. For example:

```
IF X = 1 THEN A = 1: B = 2: IF Y = 1 THEN A
= A + 1: B = B - 1
```

will set A = 2 and B = 1, if X = 1 and Y = 1 or A = 1 and B = 2, if X = 1 and Y<>1. A,B are unchanged if X<>1.

One final interesting result that I found was that in a program line which includes a PRINT statement, if the final character on the line is a quote the mark can be eliminated, thereby saving one byte of storage.

This means that the following program lines will produce the same result:

```
PRINT "NO FINAL QUOTE NEEDED"
PRINT "NO FINAL QUOTE NEEDED
```

Level I Guidelines

Some of the above results have shown you how to conserve memory space, while others have shown you how to increase speed, usually at the expense of program size. You should make the tradeoffs you feel are necessary in your own applications. It should be possible to obtain the benefits of both reduced program size and increased speed if the "80/20" rule of programs applies in your case (i.e., 80 percent of the execution time is spent in 20 percent of the code).

Following is a summary of some general guidelines you can use to increase the performance of your programs.

1) Avoid unnecessary use of parentheses.
2) Use the LET statement in assignment statements.
3) Use FOR-NEXT loops as much as possible without tests for exiting the loop.
4) Use FOR-NEXT loops on a single line.
5) Avoid unnecessary statements within loops.
6) Use variables in frequently evaluated expressions rather than constants or array elements.
7) Use compound statements rather than sequences of simpler statements.
8) Use the random function with a zero parameter where feasible.
9) Where possible, use conditional statements which evaluate false most of the time.
10) In arithmetical expressions use multiplication operations rather than division operations.

As I have noted, these items are strictly guidelines: Consider them along with the various timing results I have presented.

I have applied some of these guidelines in Listing 7a which was recoded in Listing 7b. The execution time for the first program was 47 seconds. Using the recoded version, the execution time was reduced to 17 seconds, a reduction of almost 64 percent!

While results such as this may not be possible in every case, I believe that the savings you can attain are well worth the effort. ■

```
10    A(0) = 1
20    FOR I = 1 TO 500
30    X = (1/6.28) * A(0) * I
40    IF (((X - A(0)/100) > .0001) THEN X = 6.28*X
50    A(I) = X
60    NEXT I
```

Listing 7a: Sample program for use in applying Level I BASIC programming guidelines.

```
10    P = 6.28
20    K = A(0)/P
30    L = A(0) + 5
40    M = 1/100
50    N = .0001
60    FOR I = 1 TO 500
70    LET X = K*I
80    IF (X - L)*M >N LET X = P*X
90    LET A(I) = X
100   NEXT I
```


Listing 7b: Recoded version of program shown in Listing 7a.



AUTHORIZED

Radio Shack® DEALER A301

COMPUTER SPECIALISTS



10% DISCOUNT Off List

64K 1 Drive
$3499.00

Popular 16K Level II System	$ 722.00
26-1145 RS-232 Board	84.00
26-1140 "O" K Interface	254.00
26-1160 Mini Disk	424.00
26-1171 Telephone Modem	169.00
Fast 100 CPS Centronics 730 Printer	675.00
Highly Reliable Lobo 5¼" Drives	375.00
Versatile Lobo Interface, 8" Drives and IMI Hard Drives	**Call For Prices**

15% DISCOUNT Off List

4K Level II
$527.00

No Taxes on Out Of State Shipments

Immediate Shipment From Stock

MICRO MANAGEMENT SYSTEMS, INC. ✓72
DOWNTOWN PLAZA SHOPPING CENTER
115 C SECOND AVE. S.W.
CAIRO, GEORGIA 31728
912-377-7120

Full Factory Warranty on All Items Sold.

VISA, Master Charge and COD's, Add 3%

STATIC ELECTRICITY
YOUR BIGGEST ENEMY!!!

STATIC IS THE MAJOR CAUSE OF PROGRAM AND DATA LOSS

Compuguard 2000TM can help eliminate static problems now! Compuguard is specially formulated to reduce static electricity in all types of carpeting. You simply spray Compuguard on carpeted and fabric covered surfaces near your data processing equipment and Compuguard *immediately* goes to work eliminating troublesome static.

You can't afford to be without the protection Compuguard 2000TM will give. Before you lose another program, *ORDER TODAY!!* Your Compuguard 2000TM Starter Kit, at the low introductory price of $12.95, includes a half gallon of Compuguard 2000TM, spray bottle and complete instruction.

YOUR SATISFACTION IS 100% GUARANTEED OR YOUR MONEY BACK!!!

SEND NOW - Your Check or Money Order for $12.95 per Kit With Your Complete Return Address To:

Woodland-Hafner Associates ✓230
Research Building
444 N. 3rd Street
Philadelphia, PA 19123

OR CALL COLLECT FOR INFORMATION (215)928-1691
Dealer Inquires Invited
Master Charge or Visa Accepted

W O R D
Processing
in
B A S I C

ULC UPPER/lower case that is fully compatable with Radio Shack's kit **$4.95**

NUM Listing without line numbers for the final copy. **$4.95**

TERM No more line listings that run off the page **$4.95**

APOS Allows BASIC to save text as program files **$4.95**

"WIZ" Our manual on word processing with BASIC **$4.95**

These programs run on any Level II cassette or disk system and can be turned on or off from BASIC.
They are distributed on cassette tape with instructions.

SPECIAL OFFER

ALL 4 programs plus the Manual for only **$14.95**

Professional Data Corporation ✓237
100 Broadway
North Haven, CT. 06473
(203) 239-7671
VISA/ MASTER CARD

---

the Spooler for your TRS-80*!

THE SPOOLER separates the logical function of input/output operations from the physical function of the same input/output operation. The processor and printer can function independently of each other. As a result, typical commercial applications run nearly TWICE as fast.

THE SPOOLER will fit into *your* configuration—no required amount of memory or buffer space. The distribution disk provides 40 distinct versions of THE SPOOLER, 20 for use in a 48K system and 20 for use in a 32K system.

THE SPOOLER requires no modification to your user application program.

Price: $100. Add $4. for credit card orders.
Add $5. for C.O.D. orders
Documentation available separately for $10.
Model II version now available.

Phone (513) 891-4496 or write:

Snapp Inc. ✓232
8170 Corporate Park Drive
Cincinnati, Ohio 45242

* TRS-80 is a trademark of the Radio Shack Division of Tandy Corporation

Your neat graphics can get shot to ribbons with CHR$(23).

Double Size Graphics

Bertram Thiel
159 West Main St.
Frostburg, MD 21532

It's funny how one thing leads to another in computing. I start adapting a hangman program and end by PEEKing, POKEing and performing some fancy logic that has nothing to do with spelling.

While transcribing a hangman program into my TRS-80 Level II machine, I decided that the meager graphics in the original needed some embellishment, like sketching the figure and gallows, followed by a rope dropping down and the head moving to one side with the word "snap" appearing next to it.

Simple Garbage

That's simple enough, but I am using the double-sized character width for greater legibility on my 9-inch monitor with the command:

```
PRINT CHR$(23)
```

That's where the trouble begins. I have written the graphics part using SET(X,Y) and a PRINT@ for the word to appear near the head, but in normal 64 character mode. When I insert the CHR$(23) at the beginning and run it, all I get is garbage, and the PRINT@ line fails to appear.

Extensive debugging fails to show anything of importance, except when I eliminate the CHR$(23), everything works fine. It is also apparent that once you are in the double-width mode, the only way to get out of it is to clear the screen with the CLS command, erasing anything on the screen. Radio Shack gives no information on how to restore single width graphics and letters without erasing the screen.

The article,"Hidden Codes and Missing Chips", by Patrick and Leah O'Connor (*80-Microcomputing*, January, 1980) starts me on the way to a solution when they describe how double mode works in hardware. I try OUT255,0 and OUT255,8 to go back and forth between the two modes, but it is too quick. The OUT command does not latch, so when it is finished the double mode reverts back to what it was before.

Putting the OUT command in a delay loop helps, but this is impractical. Somewhere there has to be a bit that is flipped and used as a reference to change the bit No. 3 on the output port when it is finished.

To find it, I have to get my feet wet in the swamp of PEEK and POKE to examine the several hundred addresses of reserved RAM that Radio Shack does not explain.

Since some byte has to change when going from CLS to CHR$(23), I try writing a short program to test RAM within range of addresses, compare the contents before and after the conversion and store any positive results for display at the end of the run.

Listing 1 does just that, storing the contents of memory in B and C, then comparing them and storing those that changed. I dimension the arrays to 12 places which, as it turns out, are more than enough. Try the program and specify memory locations starting at 16384 and ending at 17128, which is the zero at the beginning of Program Text (see the T-BUG manual for more detailed information).

The results show that there has been a change in the cursor location, and six other locations in reserved RAM. The one that stands out and says, "BINGO!" is location 16445, which shows a zero in normal mode and an eight (or binary 00001000) for data pin No. 3 in the CHR$(23) mode.

Now all I have to do is POKE 16445,0 to convert back to normal graphics and character size. As far as I can tell, POKE 16445,8 is equivalent to PRINT-CHR$(23).

Switching back and forth between normal and double mode, it is soon apparent how the thing works.

Even Numbering

First, the PRINT@, in double mode, only works for a word starting at an *even*-numbered position. If you are in double-width mode and type:

```
10   REM  ADDRESS COMPARE FOR TRS-80
20   REM  B THIEL   1/05/80
30   DIM D1(12),D2(12), D3(12)
40   INPUT "STARTING ADDRESS";A1
50   INPUT "ENDING ADDRESS";A2
60   LET A=A1
70   CLS
80   B=PEEK(A)
90   PRINT CHR$(23)
100  C=PEEK(A)
110  IFB<>C THEN GOSUB 200
120  LET A=A+1
130  IF A<A2 THEN 70
140  CLS
150  PRINT "ADDRESS","NORMAL","DOUBLE"
160  FOR D=1 TO 12
170  PRINT D1(D),D2(D),D3(D)
180  NEXT
190  STOP
200  J=J+1
210  D1(J)=A:D2(J)=B:D3(J)=C
220  RETURN
```

Program Listing 1.


TRS-80 LEVEL II

$675. COMPLETE SYSTEM

Limited quantity in stock

The world's most popular microcomputer, with 16K of memory and Level 11 basic for only $675, complete with full 90 day Radio Shack warranty.
We accept check, money order or phone orders with Visa or Master Charge. (Shipping costs added to charge orders).

Disk drives, printers, peripherals, software & games... you name it, we've got it (both Radio Shack & other brands). Write or call for our complete price list.




✓145

C&S ELECTRONICS MART, LTD.

AUTHORIZED DEALERSHIP Radio Shack®

32 EAST MAIN • MILAN, MICHIGAN 48160 • (313) 439-1508

TRS-80 is a registered trademark of TANDY CORP.

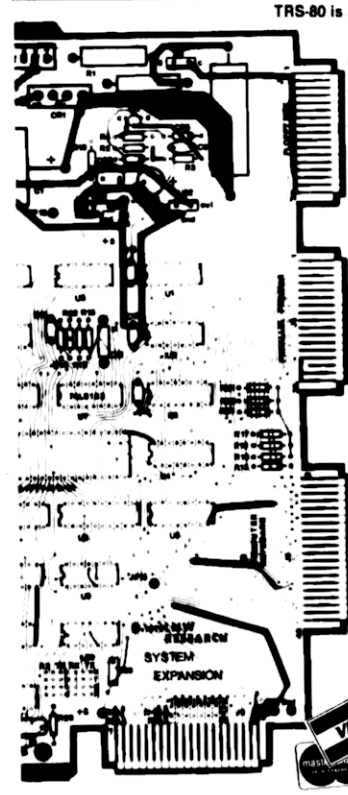

SYSTEM EXPANSION

FOR THE

TRS-80™

AT

$69.95 [PC BOARD & USER MANUAL]

- SERIAL RS232C/20mA I/O
- FLOPPY CONTROLLER
- 32K BYTES MEMORY
- PARALLEL PRINTER PORT
- DUAL CASSETTE PORT
- REAL-TIME CLOCK
- SCREEN PRINTER BUS
- ONBOARD POWER SUPPLY
- SOFTWARE COMPATIBLE
- SOLDER MASK, SILK SCREEN

LNW RESEARCH ✓53

8 Hollowglen St. Irvine CA
714-552-8946 92714

TO ORDER

P.O. Box 16216 Irvine CA 92713
Add $3 for postage and handling.
CA residents add 6% sales tax

Card No. _____ Expiration Date _____ Signature _____

NIXON'S* FAVORITE TAPES



BLANK CASSETTES
PREMIUM GRADE C-20'S
5 SCREW HOUSINGS

89¢ea. 10/$8.00 100/$75.00
ORDERS UNDER $20

ADD $2 - IN OHIO ADD 5-1/2% TAX

JOHNSON DATA PRODUCTS

P.O. BOX 17176 ✓226
CLEVELAND, OHIO 44117

*ZIGGY NIXON

Its...SOFTWARE
MINIVENT

MINIVENT performs minimal inventory control for the maximum number of inventory items. It is written for the TRS-80* 16K Level II in BASIC, with built-in machine language routines for fast searching and data tape input. **MINIVENT** can handle up to 1400 inventory items, showing parts on hand, order quantity, and last order day. (It does not permit descriptions or prices.)

MINIVENT can search for, add, or delete items, and change quantities or dates. **MINIVENT** will display items which need to be ordered, and slow moving items. With optional printer, **MINIVENT** can print an order list and full inventory.

The full price $49.95 includes two versions of **MINIVENT** (8 or 12 position part no.'s) and complete documentation.

Other TRS-80 Its...Products

COMPU-DIET - Weight Loss System
Behavior Mod, Forecast, Database
SE - Search Entry Retrieval Program
Machine Language, 12 to 44K ASCI char.
BASICIO - Machine Language I/O for BASIC
Data and Programs to Tape or Disk

Please send
☐ **MINIVENT 2.0** @$49.95 ☐ **SE 2.0** (tape) @$24.95
☐ **COMPU-DIET 1.2** @$19.95 ☐ **SE 3.0** (disk) @$49.95
☐ Additional Information ☐ **BASICIO 1.5** @$14.95

Fla. Res. add 4% Sales Tax - Total $_____
☐ Check/Money Order ☐ VISA ☐ MASTERCHARGE
Card No._____ Exp. Date _____
Name _____ Bank No. (MC)_____
Address_____

Its... Information Technology Systems
POB 2667 Sarasota FL 33578

*TRS-80 is a trademark of Radio Shack, a Tandy Corporation

✓300

Its...SOFTWARE
COMPU-DIET

A computer based nutritional balancing system. Professional psychologists and nutritionists have combined with computer technology to create **COMPU-DIET**: a program that allows you to spend minutes a day at your TRS-80* and lose lbs. per week.

Each day you and your family use **COMPU-DIET**, your bodies will come closer to healthful equilibrium — using natural foods that you like. With this new scientific technique, your computer will help you create a unique metabolic balance that guarantees optimal weight loss. Finally, the ultimate weight loss diet; one you stay with and lose all you want — 30, 40, 50 lbs. or more.

COMPU-DIET is written in BASIC for the TRS-80 16K Level II. The full price of $19.95 includes behavior mod program, nutrition data-base, weight forecast program, and Weight Loss booklet.

Other TRS-80 Its...Products

MINIVENT - Minimal Inventory Control
1400 items, 16K Level II
SE - Search Entry Retrieval Program
Machine Language, 12 to 44K ASCI char
BASICIO - Machine Language I/O for BASIC
Data and Programs to Tape or Disk

Please send
☐ **COMPU-DIET 1.2** @$19.95 ☐ **SE 2.0** (tape) @$24.95
☐ **MINIVENT 2.0** @$49.95 ☐ **SE 3.0** (disk) @$49.95
☐ Additional Information ☐ **BASICIO 1.5** @$14.95

Fla. Res. add 4% Sales Tax - Total $_____
☐ Check/Money Order ☐ VISA ☐ MASTERCHARGE
Card No._____ Exp. Date _____
Name _____ Bank No. (MC)_____
Address_____

Its... Information Technology Systems
POB 2667 Sarasota FL 33578

*TRS-80 is a trademark of Radio Shack, a Tandy Corporation

✓301

Character	Division	Remainder	Division	Remainder	Action
0	x/2	no	x/2/2	no	x = x
1	(x + 1)/2	no	(x + 1)/2/2	yes	x = x – 1
2	x/2	no	x/2/2	yes	x = x – 1
3	(x + 1)/2	no	(x + 1)/2/2	no	x = x – 2

Table 1. Logic chart.

```
PRINT@100,"HELLO 1":PRINT@165,
"HELLO 2"
```

you see only the first line printed. Now enter:

```
POKE16445,0
```

and the other line will appear. Note they are both double spaced. Double-width mode inputs characters every other position in memory, and if they don't start in an even position, you'll never see them. This can be surprising when loading the screen memory with a message or graphic in double-width, and you have it suddenly appear by reverting back to the normal mode.

If you have printing on the screen in normal mode and you POKE 16445,8 or PRINT CHR$(23), you see only one half of what was there before. Also, the whole screen is shifted right one double-character width, which is the clue to understanding how double mode characters and graphics work.

Remember that you can SET any X position between 0 and 127, but in double mode all you have available is every other *pair* of X memories. If we look at the first four numbers, 0,1,2 and 3, you'll see what I mean.

Type in SET(0,30) and you get a block in positions zero and one (in double width mode), SET(1,31) occupies screen positions two and three on line 31. SET(2,32) and SET(3,33) though they do reside in video memory, are not displayed on the screen. POKE 16445,0 and you see them; POKE 16445,8 and they disappear again. To draw in double mode graphics, you have to take this into account.

The only thing left to explain is how to do it easily, especially if you are graphing. Studying the characteristics of the numbers, it becomes apparent that each had a couple of characteristics unique to its own group (multiples of four). Each time you divide by two you have a result that either does or does not have a remainder, with a one added to compensate for odd numbers.

Table 1 shows how a position can be evaluated and, when true, what action will be taken to set the proper memory bit to give a continuous line.

Subroutine

The subroutine starting at line 1000 in Listing 2 uses these characteristics from the table with the integer function and the logical AND to determine if there is a remainder after division.

Note that a fourth decision line does not exist since, if the first three are not satisfied, then the X must be of character three type which requires a displacement two positions to the left. Special consideration is given to zero in line 1020 and an overvalue check in line 1010.

If you enter the program as shown and run it, you get a normal graphics line from 0,0 to 47,47. Insert:

```
15 PRINTCHR$(23)
```

and note the discontinuous line on a new run. To activate the subroutine, put in the line:

```
35 GOSUB 1000
```

and you correct this problem. Study how the subroutine is used and insert it whenever you decide to use double mode in graphics.

With the knowledge of the PRINT@ idiosyncracies and the unusual use of graphics memory storage, many unusual and useful effects can be accomplished. ■

```
1    REM        DEMONSTRATION PROGRAM WITH GRAPHICS
2    REM        SUBROUTINE TO CORRECT FOR CHR$(23)
3    REM        B THIEL  1/05/80
10   CLS
20   FOR Y=0 TO 47
30   X=Y
40   SET(X,Y)
50   NEXT Y
60   GOTO 60
999  END
1000 REM SUBROUTINE TO EVALUATE X POSITION IN SET COMMAND
1010 IF X>127 PRINT "X IS OVERVALUED": STOP
1020 IF X=0 RETURN
1030 A=X/2
1040 B=A/2
1050 C=(X+1)/2
1060 D=C/2
1070 IF((A-INT(A))=0) AND ((B-INT(B))=0) THEN RETURN
1080 IF((C-INT(C))=0) AND ((D-INT(D))>0) THEN X=X-1:RETURN
1090 IF((A-INT(A))=0) AND ((B-INT(B))>0) THEN X=X-1:RETURN
1100 X=X-2: RETURN
1110 STOP
```

Program Listing 2.

COMPUTER FORMS ↙240

1-616-429-7922 | MICROCOMPUTER PAPER PRODUCTS

*ALL ITEMS BELOW: BLANK, WHITE, FANFOLD, TRACTOR (PINFEED) PAPER STOCK

POSTCARD, QSL, CARD STOCK: 4"x6" (7" carrier width) 1/4" EXTRA MARGIN FOR 3-1/2"x5-1/2" CARDS (Meets P.O. Size & Thickness requirements)

250 cards . . $6.95 500 cards . . $9.95 1000 cards . . $17.95

ADDRESS LABELS: 15/16" x 3-1/2", 2 labels across, Pressure Sensitive

250 labels . . $2.95 500 labels . . $5.95 1000 labels . . $9.95

PAPER: 9-1/2"x11" (8-1/2x11 w/1/2" perforated margins)

500 sheets . . $5.95 1500 sheets . . $15.95

3200 sheets . . $28.95

PAPER: 14-7/8"x11" (non-perf margins)

500 sheets . . $6.95 1500 sheets . . $16.95

3200 sheets . . $29.95

Cash Order: Include $2 for shipping charges, and the excess will be billed with your order. Credit Card Order: Shipping charges will be added to your order. Send all credit card information.

CHECK —OR— MONEY ORDER

VISA

COMPUTER FORMS, 5500 CARIBOU, STEVENSVILLE, MI 49127

"a phone call away from UPS delivery"

5 COMPLETE STORES IN ONE!

COMPUTER CENTER

features a complete line of

SOFTWARE and BOOKS

for the

TRS-80

write for information

DigiByte SYSTEMS CORP. ↙222

31 EAST 31st STREET
NEW YORK, N.Y. 10016
(212) 889-8130

TRS-80 is a registered trademark of TANDY CORP.

THE COMP~CASE



ATTACHE STYLE CASES FOR CARRYING AND PROTECTING THE TRS-80 COMPUTER. HIGH QUALITY LUGGAGE CONSTRUCTION. ONE CASE FOR COMPUTER, EXPANSION UNIT, TAPE RECORDER OR DISK DRIVES. SECOND CASE FOR MONITOR WITH EXTRA SPACE FOR MODEM OR MINI-PRINTER. NEVER A NEED TO REMOVE EQUIPMENT FROM CASE. SIMPLY REMOVE COVER, CONNECT POWER AND OPERATE. COVER CAN BE REPLACED AND LOCKED FOR SECURITY WITHOUT DISCONNECTING CABLES. OPTIONAL RF-MODULATOR CONVERTS ANY TV SET INTO A MONITOR MAKING IT UNNECESSARY TO CARRY MONITOR.

RS201 TRS-80 Computer case	$109
RS202 TRS-80 Monitor Case	84
RS203 RF-Modulator	25
P402 Line Printer II Case	89
CC90 Matching Attache Case	75

CASES ALSO AVAILABLE FOR APPLE, ATARI, CENTRONICS AND PAPER TIGER

COMPUTER CASE COMPANY ↙199

5650 INDIAN MOUND CT., COLUMBUS, OHIO 43213
(614) 868-9464

VISA

EXPANDED MAILLIST SYSTEM

By Harry Hopkins

After 18 months of development and one year in field testing C.E.C.S. now releases the most complete mailing list system available for the TRS-80, at a special low introductory price of $59.95. The system requires a single disk, a 32k interface and a printer.

The Expanded Maillist System utilizes an exclusive machine language sort which allows for the sort of 500 records by name, state or zip code in 5 seconds! The system has complete error trapping and recovery such as automatically saving the file when memory space is full and remaining in the system under a 'file not found' condition. The system also has multiple file and reorganization capabilities.

The following fully linked programs are included in the Expanded Maillist System:

1. **DUPLICATE CHECKING**—Checks for duplicates as you enter and also has a separate routine that will purge an entire file of duplicate names with a single command.
2. **FILE MAINTENANCE**—Used for adding, deleting and complete editing of your mail list files.
3. **LABEL AND LIST PRINTING**—Allows selective printing of labels or lists on up to a ten digit key. Also has full suppression capability. For example, if you want a list of everyone in your file with a 'JAN' in their key code except those with an '80' you should select 'JAN' and suppress '80'.
4. **STATUS ANALYSIS**—This program will generate statistical reports on the percentages of names with certain keys or regional breakdown. Very useful for last issue notices on labels.
5. **FILE REORGANIZATION**—With this program you may reorganize your files into specific alpha or zip code ranges for true multi-file capability.
6. **MULTI-PURPOSE LABEL UTILITY**—Provides formatted printing of labels for special applications.

Expanded Maillist System on diskette with manual $59.95
Manual only $3 with full credit towards purchase.

AMCT-80

By Earl Peterson

This automatic morse code teacher for the 16k level 2 TRS-80 is the only morse code program that will automatically (at your option) slow down or speed up depending on your proficiency to receive code. It includes 9 preprogrammed progressive exercises. Fully variable speed up to 30 w.p.m., 1-9 characters per group, and 1-9 spaces between groups are user selected options. The send mode allows for keyboard entry concurrent to sending by utilizing a 256 byte ring buffer. There are 9 user programmable messages of 64 characters each.


This machine language program is truly the morse code teacher of tomorrow, today!

AMCT-80 on cassette with full documentation $14.95
Dealer inquiries invited.

master charge VISA

COST EFFECTIVE COMPUTER SERVICES
1041 Ute — P. O. Box 3543 Grand Junction, CO 81502
(303) 243-3629

↙52



TRS-80™‡ SOFTWARE!

*CANNED SOFTWARE & the can is a trade mark of BCC.

Yes! Quality Software for the TRS-80 is now written & available. BCC is pleased to be able to present some very fine software now with even more available in the very near future. Also we develop custom designed software for your every need. Write us for a FREE price quote.

‡TRS-80 is a trade mark of the Radio Shack Div. of Tandy Corp.

For Software Think BCC

Mail Base 80 ___MOD I (Requires 48K & 4 drives) $69.95
___MOD II(Requires 48K & 4 drives)$129.95
A RANDOM ACCESS program which keeps track of an unlimited number of entries. Plus it allows direct access of information in any order. Today, list all people who have outstanding bills & tomorrow produce a list in zip-code order. EXCELLENT!!!

Oil Delivery ___MOD II (REQUIRES 48K & 4 drives) write for price quote.
A system for the '80s. This system handles everything for the heating industry.

Vendor ___MOD I (Requires 48K & 2 drives) $39.95
This program keeps track of an unlimited number (650 per disk) of vendors. Allows direct access of coded information by vendor number, & also permits access by various other fields.

For Supplies Think BCC

Disks & Tapes ___5¼ Inch diskettes 3M Brand $49.95 (10 in plas. case)
___8 Inch diskettes 3M Brand $64.95 (Box of 10) ___5¼"Verbatim $39.95 (Box of 10)
___Cassettes Very High Quality $16/doz C20's. ___ADD 'n STAC stackable cassette holders. Each holds 8 cassettes. $3.49ea

Printers The fabulous BASE 2 PRINTER 96 char ASCII with Tractor Feed & 2K Buffer. This printer just can't be beat!!! $649.00 (2 for $1200.00)
RECONDITIONED CENTRONICS 102A (330 chars/sec!!!) $1500.00

☐ Master Charge ☐ Visa Exp. Date_____ Card No._____
Signature _____

ORDER NOW! All programs come on quality cassettes. Programs are available on diskette for an additional charge of $7.00 per order. NYS residents add 7%. Check boxes of items being ordered:
of items ordered_____Total amount enclosed_____(All items must be prepaid)

Bourrut Consulting Corporation
21 Friendly Rd. Smithtown, N.Y. 11787

↙57

AN INVITATION TO BEAT INFLATION

July 1, 1980, the cover price of *KILOBAUD MICROCOMPUTING* is going up to $2.95. Inflation has finally hit. BUT, we would like to extend you an *INVITATION TO BEAT INFLATION . . . SUBSCRIBE OR RENEW* your present subscription from now until July 18, 1980, *AT THE OLD RATES.*

Don't miss an issue of the industry's most complete and informative journal by letting this *SAVINGS* pass by . . . fill out the coupon below today. This price increase makes all other Kilobaud Microcomputing subscription offers void on July 18th . . . so hurry and *BEAT THE 18% INFLATION.*

OF COURSE, I'LL BEAT INFLATION . . .

☐ New Subscriber ☐ Renewal (please affix an address label from your most recent magazine)
☐ 1 year/$18.00 ☐ 2 years/$30.00 ☐ 3 years/$45.00
☐ Payment enclosed Bill: ☐ Me ☐ Master Charge ☐ VISA ☐ Amerex
Card # _____ Expire Date_____
Signature _____ Interbank #_____
Name/Label _____
Address _____
City_____ State_____ Zip_____

Canadian—$18.00, 1 year only,US funds. Foreign—$23.00, 1 year only, US funds. Please allow 6-8 weeks for processing

THIS CARD EXPIRES JULY 18, 1980
KILOBAUD MICROCOMPUTING PO BOX 997 FARMINGDALE NY 11737

306B8

↙Reader Service—see page 162

9.95 SOFTWARE

P.O. BOX 521 Lowell, MA 01853

1 • Memory based printer spooler, overlap processing and I/O.

2 • IBM based terminal driver, EBCD and correspondence code. Full ASCII character set with overstrikes. Scripsit ZAPS.

3 • Disk timing program. Meter Type numerical and statistical screen displays. Very easy calibration of all type drives.

4 • Cassette test programs. Writes test data to tape, then displays all errors on screen. Use to check all facets of cassette operation and duplication quality.

SEND FOR FREE FLYER

— The bottom line —

COST: $9.95 Each + .75 postage
MA Orders + 5% tax ✓235

FINALLY!

PROFESSIONAL PROGRAMMING TOOLS FOR EVERY BASIC PROGRAMMER

Do you write Basic programs with your TRS-80?* Then you know there are times when you need to:

- **RENUMBER** part or all of your program.
- **DELETE** many lines with one command.
- **APPEND** common routines from tape.

Now, with **PROgrammer,** you can do **all** these things! And **COMPRESS** your programs to speed execution and reduce size. And **MOVE** blocks of lines within your program quickly and efficiently. Moreover, load **PROgrammer** just once, and *these commands are always available!*

PROgrammer: $25 on cassette with complete instructions. Level II required. Please indicate memory size with order. Calif. residents add 6% sales tax. *TRS-80 is a trademark of Tandy Corp.

RATIONAL SOFTWARE ™
963 E. California Pasadena, CA 91106
✓307

SUBDIVISION GEOMETRY MANUALS

FOR MICROCOMPUTERS

Includes complete listings of programs used in engineering practice since 1977, plus DOCUMENTATION, & INSTRUCTIONS for putting these programs on YOUR OWN MICRO.


⊕ Traverse Geometry	$25
⊕ Coordinate Geometry	25
⊕ Profile Grade	20
⊕ Curve Geometry	20
⊕ Radial Stakeout	20
⊕ Curve Stakeout	20
Total	$150

SAVE $31.00
All 6 Manuals
Only **$99.00**

Visa & Mastercharge
Telephone orders accepted


DEALER INQUIRIES INVITED

Andrew Machen
Consulting Civil Engineer
143 C So. Cedros
Solana Beach, CA
92075 ✓95
(714) 755-4033

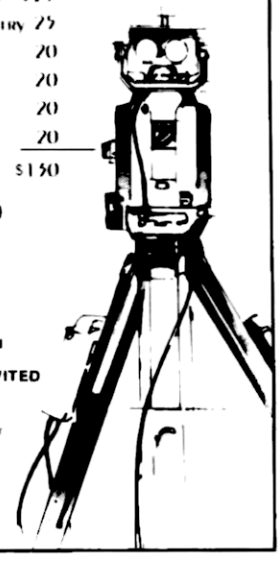

Let Your Computer Control Your Home

Now have full computer control of up to 256 lights, appliances and even wall switches without special wiring. The SciTronics REMOTE CONTROLLER permits direct control of the inexpensive BSR remote line-carrier switches sold by Sears, Radio Shack and many others.

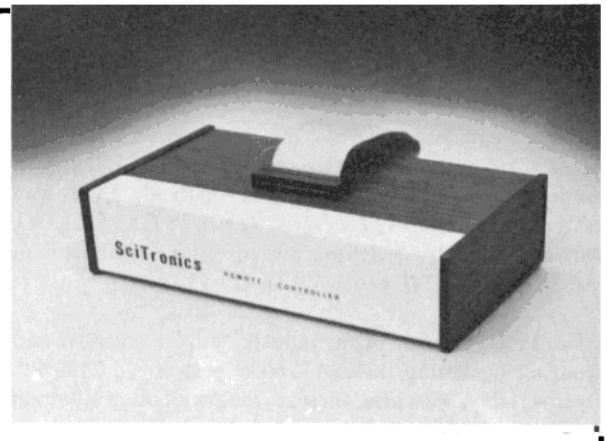

remote switches not included

Features:

- Controls all 256 remote switches—not just 16
- No ultrasonic link used—prevents erractic operation
- No BSR command module required
- Plugs directly into your keyboard or Expansion Interface Jack
- Simple to use—sample software provided
- Attractive wood grain case

Applications:

- Make your entire home, business or apartment "computer controlled"
- Save energy by controlling lights and appliances
- Control lights and alarms for security systems

ENCASED SELF POWERED CONTROLLER FOR TRS-80-I **$184.**

Send check or money order to: ✓280
SciTronics Inc.
523 S. Clewell St., P.O. Box 5344
Bethlehem, PA 18015
(215) 868-7220

Master Charge and Visa accepted. PA residents add sales tax.
C.O.D. is accepted.

A real I/O Driver for the DEC LA-34 turns it into a fully working terminal.

DECwriter Driver

James D. Beauchamp, Jr.
6214 Silverleaf
League City, TX 77573

What is better for a microcomputer's output blues than a line printer, but costs about the same? A printing terminal!

After considering various line printers I decided the best thing that I could buy for my TRS-80 was the DECwriter LA-34. Here was a table top printer, for about the same price as a Centronics line printer, yet was a professional terminal as well. The only thing missing was the software driver enabling the LA-34 to be used as a terminal.

Though the RS-232 port from Radio Shack has a DECwriter Driver listed in the instruction manual, it is only an output driver to be used with the LPRINT command. I wanted a real I/O driver for my DECWRITER.

The Control Codes

So I sat down, chained myself to the computer and wrote the Term program that Radio Shack had announced but not yet released. The DECwriter I/O driver is broken down into several sections which I have separated with comment lines. The first section of the listing is the control codes.

Control A is used as a BREAK. The key labeled BREAK on the LA-34 transmits a .233 ms pulse which is ignored by the TRS-80. The computer decodes its own break as 01H. This is the control character SOH in ASCII and is transmitted by the CTRL A on the LA-34.

The second control character, S, was added because the TRS-80 has a habit of speeding off during the DOS PRINT command. Every time I tried to list a program from disk, the TRS-80 would outrun the LA-34 and I would lose valuable data.

Since the DECwriter can automatically transmit an X-OFF character whenever its character buffer contains over 100 characters and an X-ON when it contains less than 10, I decided to take advantage of this feature.

During the print cycle, whenever an X-OFF is received, the print routine enters a tight loop (at label X-OFF). When any character other than X-OFF is in the RS-232 data register, the loop is terminated.

During normal operation, when the register does not contain the X-OFF character, the loop is ignored. The loop can also be entered by pressing the Control S during printing and exited by pressing the carriage return.

Another control character I added, to prevent printing on the perforations of my fanfold paper, is CTR L or form feed. I added a line counter (actually Radio Shack added it in the line printer device control block, it just seems that they did not make very good use of it) and a routine (FORMFD) to generate enough line feeds to send the printer to the top of the page whenever the FF character is transmitted.

I also inserted a check for the CTR L in the keyboard routine to allow the form feed routine to be invoked manually.

The Controls 8 and I were recognized by the TRS-80 and required no special programming. So that I could have the option of using typing paper I added a loop (PLOOP for pause loop) in the form feed routine. This caused the computer to pause at the end of each page. This loop responds to a flag (PFLAG) that is set with Control P (for PAUSE) and reset with Control R (for RESET PAUSE).

Input and Output

The next sections of the program are the Equate Table and the DCB initialization. Here I set the values in all of the DCBs except the keyboard. The keyboard is initialized by going to BASIC and using the SYSTEM command to jump to KBINIT-6 (here I have used 65001—see ORG in line 600).

This is the technique used by KBFIX and is the only way I could get the keyboard to initialize. If anyone else can get the keyboard to initialize from DOS, I would be grateful to hear how you do it.

The next section performs the actual input from the DECwriter keyboard. It first checks the UART to see if it has been initialized and, if so, inputs the character. If FORM FEED and PAUSE commands are present they are acted upon; otherwise, the character is returned. The UART is then initialized—a standard routine suggested by Radio Shack in their RS-232 manual.

FFTEST begins the output routine by checking the line counter to see if the printer is within five lines of the perforation. If it is, the current character is stored and a form feed is output.

The computer next checks the status register to see if the LA-34 is ready to receive another character, then checks the data register to see if a control character has been received from the LA-34. The possible characters are X-OFF, X-ON, CTRL P and CTRL R. If one of these is detected, it is acted upon immediately, otherwise the next character is output.

After the character is output the computer checks for a line feed and a carriage return. If a line feed has been sent, the line counter is decremented and if a carriage return has been sent, a line feed is also output.

The next section contains the subroutines for decrementing the line counter, generating a form feed, setting and resetting the PLOOP flag and a loop for PLOOP to wait in.

Reader Service—see page 162

Program Listing

```
A >MO
                00100 ;*****************************************************************
                00110 ;*                  DECWRITER I/O DRIVER                         *
                00120 ;*   AUGUST 26,1979                  JAMES BEAUCHAMP            *
                00130 ;*                                   2318 KENT ST               *
                00140 ;*                                   BRYAN, TEXAS               *
                00150 ;*****************************************************************
                00160 ;     THIS IO DRIVER ALLOWS MY DEC LA-34 TO ACT AS A FULL
                00170 ;TERMINAL TO MY TRS-80. IT ALSO TAKES CARE OF THE END OF PAGE
                00180 ;FORM FEED AND THE LINE COUNTER.
                00190 ;
                00200 ; THESE CONTROL CODES HAVE THE FOLLOWING FUNCTIONS:
                00210 ;CTRL A === BREAK
                00220 ;CTRL S === PAUSE - THIS IS A TIGHT LOOP
                00230 ;CTRL L === FORM FEED
                00240 ;CTRL U === CANCEL THE LINE
                00250 ;CRTL I === TAB
                00260 ;CTRL P === PAUSE AT END OF PAGE ON
                00270 ;CTRL R === PAUSE AT END OF PAGE OFF
                00280 ;
                00290 ;
                00300 ;*****************************************************************
                00310 ;** EQUATE TABLE                                               *
                00320 ;*****************************************************************
                00330 ;
4029            00340 LINECT  EQU   4029H          ;ADDRESS OF THE LINE COUNTER
4028            00350 PGLNTH  EQU   4028H          ;ADDRESS OF THE PAGE LENGTH
                00360                              ;THIS IS FROM TRSDOS
00E8            00370 RESURT  EQU   0E8H           ;AN OUT TO THIS LOCATION RESETS
                00380                              ;THE UART, AN IN READS THE RS-232
                00390                              ;CONTROL BITS
00E9            00400 SWITCH  EQU   0E9H           ;AN OUT TO THIS LOCATION LOADS
                00410                              ;THE BAUD RATE GENERATOR, AN IN
                00420                              ;READS THE SENSE SWITCHES
00EA            00430 CNTREG  EQU   0EAH           ;AN OUT TO THIS LOCATION LOADS
                00440                              ;THE CONTROL REGISTER, AN IN
                00450                              ;READS THE UART STATUS REGISTER
00EB            00460 DTAREG  EQU   0EBH           ;AN OUT TO THIS LOCATION LOADS THE
                00470                              ;UART XMIT HOLDING REGISTER,
                00480                              ;AN IN READS IN THE RECIEVED
                00490                              ;DATA
0010            00500 CTRLP   EQU   0200           ;CONTROL P
0012            00510 CTRLR   EQU   0220           ;CONTROL R
000C            00520 CTRLL   EQU   0CH            ;CONTROL L
                00530 ;*****************************************************************
                00540 ;* DEVICE CONTROL BLOCK INITIALIZATION                          *
                00550 ;*****************************************************************
401E            00560        ORG   16414
401E D4FE       00570        DEFW  VIDEO
4026            00580        ORG   402DH           ;INITIALIZE KB DCB
4026 22FE       00590        DEFW  DECINT
FDE9            00600        ORG   65001
FDE9 3A2840     00610        LD    A,(PGLNTH)
FDEC 322940     00620        LD    (LINECT),A
FDEF AF         00630 KBINIT XOR   A               ;INITIALIZE
FDF0 110A00     00640        LD    DE,000AH       ;PUT 10 IN DE REGISTER
FDF3 CD0800     00650        CALL  0008H
FDF6 19         00660        ADD   HL,DE          ;HL CONTAINS 0,ADD 10 TO IT
FDF7 221640     00670        LD    (4016H),HL     ;STORE 0+10 IN KB BLOCK
FDFA CD611B     00680        CALL  1B61H
FDFD C3191A     00690        JP    1A19H          ;RETURN TO BASIC
                00700 ;*****************************************************************
                00710 ;* THIS SECTION INPUTS THE CHARACTER FROM THE DECWRITER.        *
                00720 ;* IT THEN CHECKS THE CHARACTER FOR CONTROL CODES AND IF PRESENT *
                00730 ;* IT GOES TO THE CORRECT ROUTINE. FOR INSTANCE, IF A FORM FEED *
                00740 ;* IS RECIEVED, WE CALL FORMFD. IF CTRL P IS RECIEVED WE CALL   *
                00750 ;* THE SETP ROUTINE. WE THEN RETURN TO THE CALLING CODE.       *
                00760 ;*****************************************************************
FE00 3A02FE     00770 KBFIX  LD    A,(FLAG)       ;HAS UART BEEN INITIALIZED?
FE03 FE01       00780        CP    01H
FE05 C222FE     00790        JP    NZ,DECINT      ;INITIALIZE IT IF NOT
FE08 DBEA       00800        IN    A,(CNTREG)     ;HAS A NEW CHARACTER BEEN SENT?
FE0A CB7F       00810        BIT   7,A
FE0C 2812       00820        JR    Z,RSX          ;CLEAR A AND RETURN IF NOT
FE0E DBE8       00830        IN    A,(DTAREG)     ;ELSE GET NEW CHARACTER
FE10 FE10       00840        CP    CTRLP          ;IS IT CTRL P
FE12 CC80FE     00850        CALL  Z,SETP         ;SET PAUSE FLAG IF SO
FE15 FE12       00860        CP    CTRLR          ;IS IT CTRL R
FE17 CC88FE     00870        CALL  Z,RSETP        ;RESET PAUSE FLAG IF SO
FE1A FE0C       00880        CP    CTRLL          ;IS IT CTRL L
FE1C C0         00890        RET   NZ             ;IF NOT THEN RETURN CHARACTER
FE1D CD91FE     00900        CALL  FORMFD         ;IF CTRL L THEN FORM FEED
FE20 AF         00910 RSX    XOR   A              ;CLEAR A REGISTER
FE21 C9         00920        RET                  ;AND RETURN
                00930 ;*****************************************************************
                00940 ;* THIS ROUTINE IS USED TO INITIALIZE THE RS-232 PORT. IT IS USED*
                00950 ;* ONLY WHEN THE FLAG IS NOT SET.                               *
                00960 ;*****************************************************************
FE22 E5         00970 DECINT PUSH  HL               ;SAVE REGISTERS
FE23 C5         00980        PUSH  BC
FE24 F5         00990        PUSH  AF
FE25 3A02FE     01000        LD    A,(FLAG)       ;CHECK FLAG TO SEE IF UART AND
                01010                              ;BRG HAVE BEEN INIT
FE28 FE01       01020        CP    01H
FE2A 2820       01030        JR    Z,RESTOR       ;RESTORE REG AND OUT CHR IF SO
FE2C 3E01       01040        LD    A,01H
FE2E 3202FE     01050        LD    (FLAG),A       ;SET FLAG TO INDICATE UNIT
FE31 D3E8       01060        OUT   (RESURT),A     ;READ 37BCH TO RESET UART
FE33 DBE9       01070        IN    A,(SWITCH)     ;READ SENSE SWITCHES
FE35 E6F8       01080        AND   0FBH           ;LOP OFF LOWER 3 BITS
FE37 F604       01090        OR    04H            ;RSTS RTS, RSTS DTR, SETS BRK
                01100                             ;IN HANDSHAKE LATCH
FE39 32D1FE     01110        LD    (SWTING),A     ;LOAD SWTNG W/IMAGE OF LATCH
                01120                             ;BITS
FE3C D3EA       01130        OUT   (CNTREG),A     ;LOAD UART W/SWITCH IMAGE
FE3E DBE9       01140 BAUDST IN    A,(SWITCH)     ;SET BAUD RATE ACCORDING TO
                01150                             ;SWITCH SELECTION
FE40 E607       01160        AND   07H            ;LOP OFF UPPER 5 BITS
FE42 21C9FE     01170        LD    HL,BDTABL      ;POINT TO FIRST IN BAUD TBL
FE45 0600       01180        LD    B,00H          ;ZERO B REG
FE47 4F         01190        LD    C,A            ;PUT OFFSET IN C
FE48 09         01200        ADD   HL,BC          ;ADD OFFSET TO HL
FE49 7E         01210        LD    A,(HL)         ;LOAD POINTED VALUE
FE4A D3E9       01220        OUT   (SWITCH),A     ;LOAD BRG W/TABLE VALUE
FE4C F1         01230 RESTOR POP   AF
FE4D C1         01240        POP   BC
FE4E E1         01250        POP   HL             ;RESTORE REGISTERS
                01260 ;*****************************************************************
                01270 ;* CHECK IF AT LAST OF PAGE. IF SO THEN SAVE CHARACTER AND OUTPUT*
                01280 ;* A FORM FEED, ELSE OUTPUT THE CHARACTER.                       *
                01290 ;* THIS ROUTINE IS USED BY BOTH THE LPRINT COMMAND AND THE VIDEO *
                01300 ;*DRIVER ROUTINE. IT WILL BE CALLED BY (LPRINT) AND (VIDEO)     *
                01310 ;*****************************************************************
FE4F 3A2940     01320 FFTEST LD    A,(LINECT)     ;TEST IF END OF PAGE
FE52 FE05       01330        CP    5              ;WITHIN 5 OF END?
FE54 C25EFE     01340        JP    NZ,STATIN      ;OUTPUT CHARACTER IF NOT
FE57 F5         01350        PUSH  AF
FE58 C5         01360        PUSH  BC             ;SAVE REGISTERS
FE59 CD91FE     01370        CALL  FORMFD         ;DO A FORM FEED IF AT END
FE5C C1         01380        POP   BC
FE5D F1         01390        POP   AF             ;RESTORE REGISTERS
FE5E DBEA       01400 STATIN IN    A,(CNTREG)     ;LOAD UART STATUS
FE60 CB77       01410        BIT   6,A            ;TEST THREE FOR HIGH
FE62 28FA       01420        JR    Z,STATIN       ;LOOP IF NOT
                01430 ;*****************************************************************
                01440 ;* TEST FOR CONTROL CHARACTERS ENTERED WHILE IN PRINT LOOP       *
                01450 ;* OF YOU DON'T TEST HERE, YOU MAY BE STUCK IN A PRINTING LOOP   *
                01460 ;* FOR A LONG TIME.                                             *
                01470 ;*****************************************************************
FE64 DBE8       01480 XOFF   IN    A,(DTAREG)     ;INPUT ANY CHARACTER THE DEC SENT
FE66 FE13       01490        CP    13H            ;CHECK IF XOFF
FE68 28FA       01500        JR    Z,XOFF         ;LOOP IF XOFF IS BEING SENT
FE6A FE1B       01510        CP    33O            ;TEST FOR ESCAPE
FE6C CA2B40     01520        JP    Z,402BH        ;IF SO RETURN TO DOS
FE6F FE10       01530        CP    CTRLP          ;TEST FOR CONTROL P
FE71 CC80FE     01540        CALL  Z,SETP         ;IF SO ,SET PFLAG
FE74 FE12       01550        CP    CTRLR          ;TEST FOR CONTROL R
FE76 CC88FE     01560        CALL  Z,RSETP        ;IF SO, RESET PFLAG
                01570 ;*****************************************************************
                01580 ;* OTHERWISE OUTPUT THE CHARACTER                               *
                01590 ;*****************************************************************
FE79 79         01600        LD    A,C            ;LOAD A W/CHAR TO BE OUTPUT
FE7A D3E8       01610        OUT   (DTAREG),A     ;LOAD HOLDING REG W/ CHAR
FE7C FE0A       01620        CP    0AH            ;IS IT A LINE FEED
FE7E CC8AFE     01630        CALL  Z,LFCTR        ;IF SO DECREMENT LINE COUNT
FE81 FE0D       01640        CP    0DH            ;IS IT A (CR) ?
FE83 2004       01650        JR    NZ,RETRN       ;RETURN IF NOT
FE85 0E0A       01660        LD    C,0AH          ;IF SO OUTPUT A (LF) ALSO
FE87 1805       01670        JR    STATIN         ;OUTPUT TO UART
FE89 C9         01680 RETRN  RET                  ;RETURN TO CALLING CODE
                01690 ;*****************************************************************
                01700 ;*;;;;;;;;;;;;;;;;;;;;;;;;;;SUBROUTINES;;;;;;;;;;;;;;;;;;;;;;;;*
                01710 ;* FORMFD === GENERATES ENOUGH LINE FEEDS TO CREATE A FORM FEED  *
                01720 ;* SETP   === SETS THE PAUSE FLAG                               *
                01730 ;* RSETP  === RESETS THE PAUSE FLAG                             *
                01740 ;* LFCTR  === DECREMENTS THE LINE COUNTER EVERY LINE FEED       *
                01750 ;*****************************************************************
FE8A E5         01760 LFCTR  PUSH  HL               ;SUBROUTINE TO DECREMENT THE LINE CTR
FE8B 212940     01770        LD    HL,LINECT      ;GET LINE COUNT ADDRESS
FE8E 35         01780        DEC   (HL)           ;DECREMENT IT
FE8F E1         01790        POP   HL             ;RESTORE HL
FE90 C9         01800        RET
FE91 0E0A       01810 FORMFD LD    C,0AH          ;GENERATE A FORM FEED
                01820                             ;PUT LINE FEED IN C REG
FE93 3A2940     01830        LD    A,(LINECT)     ;GET LINES TO END OF PAGE
FE96 FE01       01840        CP    1              ;AT BOTTOM YET?
FE98 2806       01850        JR    Z,FFQUIT       ;QUIT IF AT BOTTOM
FE9A CD5EFE     01860        CALL  STATIN         ;ELSE OUTPUT LINE FEED
FE9D C391FE     01870        JP    FORMFD         ;AND DO IT AGAIN TILL DONE
FEA0 3A2840     01880 FFQUIT LD    A,(PGLNTH)     ;IF DONE GET PAGE LENGTH
FEA3 322940     01890        LD    (LINECT),A     ;MOVE IT TO LINE COUNT
FEA6 3A03FE     01900        LD    A,(PFLAG)      ;CHECK PAUSE FLAG
FEA9 FEFF       01910        CP    0FFH           ;IS IT FFH?
FEAB 2813       01920        JR    Z,PLOOP        ;LOOP IF SET
FEAD C389FE     01930        JP    RETRN          ;ELSE RETURN
FEB0 F5         01940 SETP   PUSH  AF             ;SUBROUTINE TO SET PAUSE FLAG
```

Program continued

PRINT MONEY WITH YOUR TRS-80!

If you have a TRS-80 disk system, you already own "Money Machine". It can "print money" for you and your family... and do it legally.

Virtually *every* business in your community has customer and prospect lists... people and companies that they should send mailings to on a regular basis. But, they seldom do. In a typical business, these names and addresses are totally disorganized and seldom used...even though they represent a valuable sales tool.

PUT YOUR TRS-80 TO WORK

Your TRS-80 has the ability to totally organize mailing lists for these companies. It also has the ability to supply them with tabular listings and mailing labels upon request. All it takes is a little bit of your time. Any progressive business would be happy to pay you a nominal fee to keep their lists organized and up to date. What's a nominal fee? You can charge 10 cents a name to enter, store and maintain each record in your computer. It's also worth 3 cents to supply this name on a gummed mailing label. Think of it. The label costs three-tenths of a cent going into the printer and, with the value you add, is worth 3 cents when it comes out the other end. That's 1000% profit. That's a "Money Machine".

HOW DO I GET STARTED?

As a minimum, you'll need a 32K TRS-80 with at least one disk drive and a good line printer. You'll also need a copy of **"LABELMAKER"**, available on diskette from The Peripheral People. This program will allow you to input names and addresses, plus optional data such as company, phone number and so on. **"LABELMAKER"** also features a unique method of coding each record. You can selectively print labels by using these codes and bypass all others. The records can be sorted by zip code or alphabetically by company or name. In other words, you can provide mailing labels or tabular listings any way your customers want them.

ANY FRINGE BENEFITS?

You bet! Providing this service is a great way to get the family involved with your TRS-80. Teenagers can easily input and output records during the day. Most women are latent business persons and your wife can easily sell the service... particularly if it means some new clothes, furniture or other "fringe benefits" for her. You can probably promote discounts or trade services with your customers. Once you've established a business in your home you can legally write off a portion of the rent and utilities...even your TRS-80...to your business. This can reduce your taxes substantially. The possibilities for making money with your TRS-80 are endless.

YOU RISK NOTHING

If you don't agree that our LABEL—MAKER program does everything that we say, then return the diskette along with a letter telling us why and we will immediately refund your full purchase price, plus the postage.

TURN THE SWITCH TODAY

Are you willing to invest $99.50 to turn the switch on your "Money Machine"? Then call The Peripheral People today and order your copy of **"LABELMAKER"**. You can charge it to your Mastercharge or VISA card.

START YOUR MONEY MACHINE TODAY BY CALLING THE PERIPHERAL PEOPLE

(206) 232-4505 ↙43

The PERIPHERAL PEOPLE Box 524 MERCER ISLAND, WA 98040

*TRS-80 is a trademark of the Tandy Corporation

DR. HOWE'S SOFTWARE

For the TRS-80 (*)

MACHINE LANGUAGE SOFTWARE

MONITOR #3.....$39.95
Disassembler; memory displays; memory move, search verify, and modify; read and write object tapes; hexadecimal arithmetic; object code relocator; unload programs for disk; symbolic output tapes; 41-page instruction manual.

MONITOR #4.....$49.95
Same as Monitor #3 but adds: save and read disk files; direct input and output of disk sectors; send, receive, or talk to another computer via RS-232-C interface; symbolic disassembly on disk.

SMART TERMINAL.....$49.95
Enables your TRS-80 to be used as a remote terminal to a time-sharing system. Supports lowercase and full range of control keys. *Automatic transmission* between memory and host computer. Much more.

PACK/UNPACK.....$24.95
Increase disk file capacity by 33% with *NO NEW HARDWARE*. Applies only to string data in random files. Ideal for mailing lists, etc.

GAME OF "LIFE".....$5.95
John Conway's game of "life" shows patterns evolving and changing swiftly before your eyes. A dazzling demonstration program!

BASIC SOFTWARE

MAILING LIST.....$69.95
Maintains mailing list files of over 1000 names per diskette. Add, delete, change, find name, machine language sort, print file.


SMALL BUSINESS ACCOUNTING.....$49.95
Based on Dome Bookkeeping Journal #612, keeps track of income, expenditures, and payroll for a small business of up to 16 employees. Daily, monthly, year-to-date summaries.

HOME BUDGET.....$49.95
Checkbook maintenance combined with records of income and monthly bills. Monthly and year-to-date summaries showing tax deductions.

DATABASE MANAGEMENT.....$29.95
Define files of any description and maintain on cassette or disk. Add, change, delete, find, sort, justify, print, line print, total fields, write.

HOWE SOFTWARE ↙103
14 Lexington Road
New City, New York 10956

(*) TRS-80 is a registered trademark of Tandy corp.

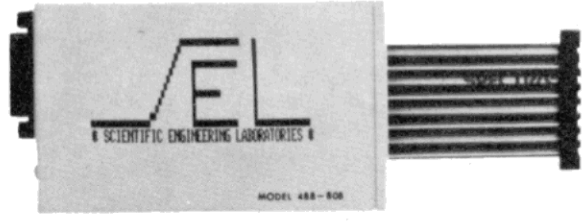

Everything needed to add *powerful controller capability* to TRS-80, Model 1, Level 2 or DOS

SCIENTIFIC ENGINEERING LABORATORIES ↙291
11 NEIL DRIVE • OLD BETHPAGE, NEW YORK 11804
TELEPHONE (516) 694-3205


GPIB-488 to TRS-80* INTERFACE

Mod. 488-80B
$225.00
+ shipping, insurance & tax

SPECIFY DISK OR TAPE

*Trade Mark of Tandy Corp. There is no affiliation between Scientific Engineering Laboratories and Tandy Corporation or Radio Shack.

LOWER CASE & GRAPHIC SYMBOLS GENERATOR KIT FOR TRS-80™ CG 16 ..... $94.50



TRUE 2 LINE DECENDER LOWER CASE. ELECTRONIC SYMBOLS. THIN LINE GRAPHICS. GAME SYMBOLS. TEXTURED BACKGROUNDS AND MANY MORE DEMO CASSETTE IS INCLUDED
FULLY ASSEMBLED WITH DETAIL INSTRUCTION FOR EASY INSTALLATION
REQUIRES ELECT PENCIL TYPE L C MOD OR ORDER MEMORY AND SWITCH KIT SMK. FOR $18 50

SYNCHRONOUS DATA SEPARATOR FOR DISK USERS. SDS $34.50

THE SYNCHRONOUS DATA SEPARATOR WILL ELIMINATE 100% OF THE SOFT READ ERRORS AND SPEED UP DISK ACCESS TIME BY ELIMINATING RETRIES BY THE DISK CONTROLLER

THE SDS PLUGS INTO THE DISK CONTROLLER'S SOCKET AND HAS ONLY TWO WIRES TO CONNECT. NO TRACES HAVE TO BE CUT. IT IS THE MOST RELIABLE AND ACCURATE DATA SEPARATOR AVAILABLE

ADD $2 50 FOR S & H. CALIF RES ADD 6% SALE TAX
SEND CHECK OR MONEY ORDER TO

G.P. ASSOCIATES ↙203
P.O. BOX 22822, SACRAMENTO, CA 95822

TRS-80 IS A TRADE MARK OF TANDY CORP

The baud rate and variable table are explained in the Radio Shack RS-232 users manual. The last section is the housekeeping routine to return to the video driver.

If you have added lowercase to your TRS-80, remove lines 2400 thru 2420 and all of the proper conversions will be made.

Conclusion

The only problem I have encountered is that the editor assembler uses upper memory to store its symbol reference table and a large table will wipe out the driver. It will also wipe out any other routines that you have in upper memory – so beware!

I invoke this routine with SYSTEM /65001 on my computer, but if you have smaller memory, change the ORG in line 600. This is the address you will use to enable the keyboard.

One last word about this program and assembly language programming on the TRS-80. If you have a disk, but have not bought the Apparat Editor/Assembler patches, you are not realizing the full potential of your TRS-80. The only problem is the lack of a memory size command at assembly to protect the drivers. ■

Continued Program

```
FEB1 3EFF    01950          LD      A,0FFH          ;PUT FF IN A
FEB3 32D3FE  01960          LD      (PFLAG),A       ;PUT IT IN PAUSE FLAG
FEB6 F1      01970          POP     AF
FEB7 C9      01980          RET                     ;RETURN TO CALLING CODE
FEB8 F5      01990 RSETP    PUSH    AF              ;ROUTINE TO RESET PAUSE FLAG
FEB9 3E00    02000          LD      A,0             ;GET 0 IN A REG
FEBB 32D3FE  02010          LD      (PFLAG),A       ;STORE 0 IN PAUSE FLAG
FEBE F1      02020          POP     AF
FEBF C9      02030          RET                     ;RETURN TO CALLING CODE
FEC0 DBEB    02040 PLOOP    IN      A,(DTAREG)      ;PAUSE LOOP, GET LAST KEY HIT
FEC2 FE0D    02050          CP      0DH             ;WAS IT A (CR)
FEC4 20FA    02060          JR      NZ,PLOOP        ;IF NOT LOOP
FEC6 C389FE  02070          JP      RETRN           ;WHEN (CR) HIT, THEN RETURN
             02080 ;*********************************************************
             02090 ;* BAUD RATE AND VARIABLE TABLE                          *
             02100 ;*********************************************************
FEC9 22      02110 BDTABL   DEFB    22H             ;110 BAUD
FECA 44      02120          DEFB    44H             ;150 BAUD
FECB 55      02130          DEFB    55H             ;300 BAUD
FECC 66      02140          DEFB    66H             ;600 BAUD
FECD 77      02150          DEFB    77H             ;1200 BAUD
FECE AA      02160          DEFB    0AAH            ;2400 BAUD
FECF CC      02170          DEFB    0CCH            ;4800 BAUD
FED0 EE      02180          DEFB    0EEH            ;9600 BAUD
FED1 00      02190 SWTING   DEFB    00H             ;IMAGE OF HANDSHAKE LATCH
FED2 00      02200 FLAG     DEFB    00H             ;FLAG TO INDICATE INITIALIZATION
FED3 00      02210 PFLAG    DEFB    00              ;PAUSE FLAG
```

```
             02220 ;*********************************************************
             02230 ;* THIS IS THE VIDEO DRIVER. DON'T FORGET TO DO THE DEC OUT. *
             02240 ;*********************************************************
FED4 F5      02250 VIDEO    PUSH    AF
FED5 C5      02260          PUSH    BC
FED6 E5      02270          PUSH    HL              ;SAVE REGISTERS
FED7 CD22FE  02280          CALL    DECINT          ;OUTPUT CHARACTER TO DECWRITER
FEDA E1      02290          POP     HL
FEDB C1      02300          POP     BC
FEDC F1      02310          POP     AF              ;RESTORE REGISTERS
FEDD DD6E03  02320          LD      L,(IX+3)
FEE0 DD6604  02330          LD      H,(IX+4)
FEE3 DA8A04  02340          JP      C,049AH
FEE6 DD7E05  02350          LD      A,(IX+5)
FEE9 B7      02360          OR      A
FEEA 2801    02370          JR      Z,VID1
FEEC 77      02380          LD      (HL),A
FEED 79      02390 VID1     LD      A,C
FEEE FE60    02400          CP      60H             ;CONVERT LOWER TO UPPER CASE
FEF0 FAF3FE  02410          JP      M,VID2          ;REMOVE THESE THREE LINES
FEF3 E65F    02420          AND     5FH             ;IF YOU HAVE THE LOWER CASE MOD
FEF5 FE20    02430 VID2     CP      20H
FEF7 DA0605  02440          JP      C,0506H
FEFA FE80    02450          CP      80H
FEFC D2A604  02460          JP      NC,04A6H
FEFF C37D04  02470          JP      047DH
402D         02480          END     402DH
00000 TOTAL ERRORS
BAUDST FE3E 01140
BDTABL FEC9 02110   01170
CNTREG 00EA 00430   00800 01130 01400
CTRLL  000C 00520   00680
CTRLP  0010 00500   00840 01530
CTRLR  0012 00510   00860 01550
DECINT FE22 00970   00590 00790 02280
DTAREG 00EB 00460   00830 01480 01610 02040
FFQUIT FEA0 01880   01850
FFTEST FE4F 01320
FLAG   FED2 02200   00770 01000 01050
FORMFD FE81 01810   00900 01370 01870
KBFIX  FE00 00770
KBINIT FDEF 00630
LFCTR  FE8A 01760   01630
LINECT 4029 00340   00620 01320 01770 01830 01890
PFLAG  FED3 02210   01900 01960 02010
PGLNTH 4028 00350   00610 01880
PLOOP  FEC0 02040   01920 02060
RESTOR FE4C 01230   01030
RESURT 00E8 00370   01060
RETRN  FE89 01680   01650 01930 02070
RSETP  FE88 01990   00870 01580
RSX    FE20 00910   00820
SETP   FEB0 01940   00850 01540
STATIN FE5E 01400   01340 01420 01670 01860
SWITCH 00E9 00400   01070 01140 01220
SWTING FED1 02190   01110
VID1   FEED 02390   02370
VID2   FEF5 02430   02410
VIDEO  FED4 02250   00570
XOFF   FE64 01480   01500
```


INFLATION BEATERS

sold with 30 Day Refund Privilege

Mod I PACKAGE...all for $ 149

- Receivables
- General Ledger
- Payables

● SUPER DISC —

70 PROGRAMS $13.95

Write: Elliot Kleiman ✓132
National Software Marketing, Inc.
4701 McKinley St.
Hollywood, Florida 33021

PROGRAM EPROMS!

Now the computer hobbyist can inexpensively program 2708s by building his own programmer. The CC-500, built from readily available parts, will turn any TRS-80* into an EPROM programmer.

The CC-500 can also expand your ROM capacity by 1K.

The complete assembly manual with software and schematics is now available for $5.95

COMPUTER CONNECTIONS
P.O. Box 400
Northford, CT
06472
✓288

*(TRS-80 is a trademark of the Tandy Corporation.)

CalData Systems Presents
WordMagic II™

Complete WORD PROCESSING designed specifically for The Radio Shack TRS-80 Model II Computer

WordMagic II* is a Word Processor designed specifically for the Radio Shack TRS-80 Model II Computer.*

FEATURES INCLUDE:

- Mailing List/Labels Generation
- Automatic Merging of Mailing Data with Text Files to created "PERSONALIZED" Form Letters
- Automatic wrap-around in text entry
- Margination, Paging, Complete Cursor Movement
- Complete Editing Commands – Insertion, Global Substitution, Overwrite, etc.
- Centering, Smooth Right, Left Justify
- Table of Contents Generation
- Automatic Page Numbering

TRS-80 is a trademark of the Radio Shack Division of Tandy Corporation

Requires 64K Model II, TRSDOS & BASIC (not provided with WordMagic)
Introductory Pricing: $100.00 Manual $20. (Cal. Res. add tax)

CalData Systems P.O. Box 178446
San Diego, CA 92117 ✓294

INTEGRATED KEYPLUS UTILITY PACKAGE

Keyplus is a collection of utilities that can be enabled directly from the keyboard of a Level II TRS-80. Seven different keyboard entry modes include BASIC shorthand (2 modes), direct graphic character input (3 modes), typewriter style input and standard TRS-80 entry.

Keyplus supports auto-repeat, lowercase video (optional hardware modification required), restoration of lost programs, keyboard debounce, single key stroke user definable strings and more!

Designed for ease of use, Keyplus routines may be enabled or disenabled in two key strokes.

The Level II version of Keyplus is available for $14.95 and a more powerful disk version (32 or 48K) sells for $19.95. Pennsylvania residents add 6% sales tax.

TRS-80 is a registered trademark of TANDY CORP.

SJW, INC. ✓244
P.O. BOX 438
HUNTINGDON VALLEY,
PA 19006
215-947-2057

NEW!
779 Line Printer Timer

Works with TRS-80® and Centronics® 779 Line Printers
Turns Motor on and off Automatically

No software or hardware changes needed. Saves motor life and power. Just solder 3 wires and mounts inside printer. Dealers wanted, inquire on company stationery, also O.E.M. and service accounts wanted. $95.00 complete with one year warranty. Make checks payable to:

Digital Timing Devices ✓308
4306 N.E. 6 Ave.
Ft. Lauderdale, FL 33334 USA
Phone # (305) 561-3757
Division of D.S.S.I.

® These are registered trademarks for Radio Shack & Centronics.

FINALLY...
PROFESSIONAL SOFTWARE...
Get results on the first run
NO MANUALS!
.....TRS-80*....

DEPRECIATION	$19
MAILING LIST	$79
ADDING MACHINE	$19
TEXT EDITOR	$99
AMORTIZATION	$19
COMPOUND INTEREST	$19
DEC/HEX/BI	$19
PAYROLL (specify) Weekly, Biweekly, Monthly, or Semimonthly	$49
INVOICE	$29

(check/m.order)

PA residents...add 6%

*TRS-80® is a trademark of the Tandy Corp
DIVERSIFIED COMPUTER SERVICES
5601 PENN AVENUE A-23
PITTSBURGH, PENNSYLVANIA 15206
412—361—7540 ✓247

The Maine Software Library

We rent games and utilities for the TRS-80* at a fraction of their purchase price.

For catalogue, check Reader Service. For faster service send S.A.S.E. to:
The Maine Software Library
P.O. Box 197
Standish, Maine 04084

✓268

*A Trade name of the Tandy Corp.

PRACTICE MAKES PERFECT*

***ESPECIALLY IF IT'S FUN!**

Every child who learns math needs practice. Problem after problem after problem. But sometimes, practice can get boring. And when it's boring, your child won't learn.

Now, though, there is a way to practice that's always interesting. And fun! It's called **ARITHMETIC.**

ARITHMETIC not only generates problems, it keeps your child involved with entertaining graphics. Moreover, it repeats troublesome problems and automatically adjusts to your child's rate of learning. And it keeps track of your child's progress.

Without a doubt, practice makes perfect. Especially with

ARITHMETIC.

ARITHMETIC. Features =, −, ×, ÷. $15 on cassette. TRS-80 Level II required. Calif. residents add 6% sales tax. TRS-80 is a trademark of Tandy Corp.

✓241

RATIONAL SOFTWARE™
963 EAST CALIFORNIA BLVD.
PASADENA, CALIFORNIA 91106

✓Reader Service—see page 162

A guessing game, where the computers recognize patterns!

True or False?

John Krutch
P.O. Box 9284
Fort Worth, TX 76107

The subject of artificial intelligence seems to fascinate everyone, computer scientists and the general public alike. Public interest in AI is amply demonstrated by the popularity of such movies as *The Forbin Project* and *The Demon Seed*. (Both of them are shallow and unimaginative; for a much more thoughtful presentation, see the computer-psychiatrist in science fiction writer Frederik Pohl's fine novel, Gateway.)

Computer scientists, like Terry Winograd and Peter Woods, are hard at work developing programs that someday, perhaps, will make these fictional portraits a reality.

Most of the programs are written for big computers with 32-bit processors and elephant-like main memories. Smaller, but interesting AI programs can be written for 8-bit processors with modest amounts of memory. The TF program I describe in this article is one of them.

How the Game Works

TF is a sort of prediction game. The program tries to predict what the player is going to do next, based on its observation of his past behavior.

The player types in the letter T or the letter F at random. The program must figure out which letter the player plans to type next. The program assumes that a person's behavior is never *truly* random. No matter how many times the player tries to arbitrarily respond, certain patterns, of which he himself may be unaware, surface in his actions. The program carefully stores each response, whether T or F, and searches for patterns in the player's behavior. If it finds a particular pattern that occurs again later, the program finds itself in a position to make a prediction.

TF is written in Radio Shack Level II BASIC. It requires 16K RAM in its present version, but it can be converted to a 4K machine without too much effort. The program stores the first four characters the player types in order to make its prediction. The character that the player types is known as the "current event." (This terminology is adopted from AI researcher John H. Andreae of New Zealand, although the program itself is not derived from Andreae's work.)

Starting with the fifth current event, TF makes its first prediction by displaying the character it has established the player will choose. The player must wait a second or two for the command READY to appear before typing another character.

The keys you strike do not appear on the display. The letter that shows on the screen after you press a key is the computer's prediction. The program keeps a running score of

Program Listing 1.

```
10 '          INITIALIZATION
20 RANDOM
30 DEFINT C-E,F,I,Q,R,T
40 DEFSTR A
50 DIM Q(1111,2)
60 CNTXTLNGTH = 4
70 CLS

100 '          MAIN PROGRAM
110   FOR I = 1 TO CNTXTLNGTH
120   GOSUB 500      ' INPUT SUBROUTINE
130   CRNTCNTEXT(I) = EVENTCODE
140   NEXT I
150 GOSUB 500      ' INPUT SUBROUTINE
160 GOSUB 800      ' PRINTING AND SCOREKEEPING SUBROUTINE
170 GOSUB 600      ' LOCATION-CALCULATING SUBROUTINE
180 IF EVENTCODE = 1 THEN Q(LO,1) = Q(LO,1) + 1 ELSE
    Q(LO,2) = Q(LO,2) + 1
190 GOSUB 700      ' CURRENT CONTEXT UPDATING SUBROUTINE
200 GOSUB 600      ' LOCATION-CALCULATING SUBROUTINE
210 GOTO 150

500 '          INPUT SUBROUTINE
510 PRINT@ 412, "READY"
520 CURRENTEVENT$ = INKEY$: IF CURRENTEVENT$ = "T" OR
    CURRENTEVENT$ = "F" THEN 530 ELSE 520
530 IF CURRENTEVENT$ = "T" THEN EVENTCODE = 1: GOTO 550
540 IF CURRENTEVENT$ = "F" THEN EVENTCODE = 0: GOTO 550
550 CLS
560 RETURN

600 '          LOCATION-CALCULATING SUBROUTINE
610 A = ""
620   FOR I = 1 TO CNTXTLNGTH
630   A = A + MID$(STR$(CRNTCNTEXT(I)),2)
640   NEXT I
650 LO = VAL(A)
660 RETURN

700 '          CURRENT CONTEXT UPDATING SUBROUTINE
710   FOR I = 1 TO 3
720   CRNTCNTEXT(I) = CRNTCNTEXT(I + 1)
730   NEXT I
740 CRNTCNTEXT(4) = EVENTCODE
750 RETURN

800 '          PRINTING AND SCOREKEEPING SUBROUTINE
810 IF Q(LO,1) > Q(LO,2) THEN TF$ = "T": T = T + 1:
    PRINT@ 350, TF$: GOTO 860
820 IF Q(LO,2) > Q(LO,1) THEN TF$ = "F": F = F + 1:
    PRINT@ 350, TF$: GOTO 860
830 RAN = RND(2)
840 IF RAN = 1 THEN TF$ = "T": T = T + 1: PRINT@ 350, TF$
850 IF RAN = 2 THEN TF$ = "F": F = F + 1: PRINT@ 350, TF$
860 IF TF$ = CURRENTEVENT$ THEN RIGHT = RIGHT + 1
870 PRINT@ 512, "TOTAL NUMBER OF ENTRIES:      "; T + F
880 PRINT@ 576, "NUMBER OF CORRECT PRE-"
890 PRINT@ 641, "DICTIONS BY THE COMPUTER:     "; RIGHT
900 PRINT@ 704, "PERCENT OF CORRECT PRE-"
910 PRINT@ 769, "DICTIONS BY THE COMPUTER:     ";
    INT(((RIGHT / (T + F)) * 100) * 10 + .5) / 10; "%"
920 RETURN
```

how well it's doing.

How does TF make its predictions? Each time the player types in a letter, TF examines the "current context"—the last four letters you've typed, including the one you just entered. The length of this context is four. That is the value assigned in line 60, but you can experiment with other values.

Suppose you type the letter T. Assume that the three previous characters were T, F and F. The program consults array Q to see what you did in the past when the combination TFFT came up.

For example, if you typed T six times and F twice after the pattern TFFT first appeared, the program predicts that the next character you will type is T. If you have typed T and F an equal number of times after a particular pattern, the program generates a random T or F as its new prediction.

Each time you type in a new letter, TF eagerly codes it (T = 1, F = 0) and stores it as data. The storage structure set up in line 50 is a 1111 X 2 array. The vast majority of the elements in this array go unused. It's done this way only for convenience.

The program consists of six modules, shown in Listing 1. An initialization routine takes care of some housekeeping, followed by the main program and four subroutines.

The REMark statements are intended to help you understand TF, but they can be omitted when typing the program. The long variable names can be abbreviated to the first two letters of the name without damage to the program. However, if the variable name contains the $ character, this must be included in the abbreviation. For instance, CURRENTEVENT$ must be typed in either as CU$ or in its entirety.

Incidentally, variable A in line 610 is set to the empty string, not to a blank. The confusion sometimes produced when double quotation marks are printed is one of the few defects of Radio Shack's Line Printer III. ■

P&T CP/M® 2 unleashes the POWER of your TRS-80 MODEL II

Pickles & Trout has adapted CP/M 2, one of the world's most popular operating systems, to the TRS-80 Model II and the result is spectacular:

- 596K bytes usable storage at double density
- Runs both single and double density disks with automatic density select
- Single drive backup
- Multi-drive software can run on a 1 drive system
- Operates with 1, 2, 3, or 4 drives
- Full function CRT control
- Type-ahead buffer for keyboard input
- Full access to both serial ports and parallel printer port
- Fully software programmable serial ports
- Loads an 18K Basic in 2.5 seconds
- Full compatibility with existing CP/M software and application packages
- Full set of 7 CP/M manuals plus our own for the TRS-80 Model II

Introductory price: $175

PICKLES & TROUT

Prepaid. COD. Mastercharge or Visa orders accepted. Shipping extra. California residents add 6% sales tax.

✓273

PICKLES & TROUT

P.O. BOX 1206, GOLETA, CA 93017. (805) 967-9563

CP/M is a trademark of Digital Research Inc. TRS-80 is a trademark of Tandy Corp.

WHAT'S NEW?

(with the "Original" TRS-80® Users Journal) ✓33

The CONNECTION, our May-Jun cover story, is a smaller-than-a-bread box device that enables even 4K Level I owners to use the RS232, serial printers, and telephone modem WITHOUT the expansion interface or acoustical coupler and to participate in the expanding area of computer-to-computer chatter via telephone. (We include a phone number listing of resources to call after you've been Connected.) An excerpt from David Lien's "Learning Level II" discusses data sorting. The creator of "ANDROID NIM" cooks up some SOUND producing BASIC routines with machine language stuffing. Our new, magical "Panacea" delves into the ways and whys of the S-80 Bus. There is a review of Radio Shack's new text editor and a user tells how to (or how not to) handle a "RELIGIOUS ERROR"!? Plus, there are the regular features: A tutorial on the Editor/Assembler for beginners; New Products; Reviews and the Business Section. It isn't called the "TRS-80 Users Journal" for nothing! It is published regularly every two months, and costs just $16.00 per year in the U.S. Get a sample current issue (first class mail) for just $3.00. Use your VISA or Mastercharge and call (206) 475-2219 today! Or, send check or Money Order to: 80-U.S. Journal 3838 South Warner Street Tacoma, Washington 98409

Yes! We are the people who developed "Android Nim" and other fine animated graphics programs with sound!



TRS-80 is a trademark of Radio Shack, a Division of the Tandy Corporation

✓Reader Service—see page 162

Learn about assembly language by "looking" into the Z-80.

Assembly Language Trainer

William L. Colsher
4328 Nutmeg Lane, Apt. 111
Lisle, IL 60532

Sooner or later, most hobbyists get the urge to learn assembly language. Unfortunately, many never get any further. They've heard that assembler is hard to learn, that only advanced programmers use it, and that it is only good for bit twiddling.

Actually, assembly language is no more difficult than any other programming language—it just takes a slightly different mind set. One must think not only about solving the problem at hand, but also about what is physically going on inside the computer.

Because nothing stands between your program and your computer's CPU, assembler programs can be very fast. Real-time games with animated graphics come to mind as a case where fast execution is critical. If you have any devices like coffee pots or furnaces you plan to use as peripherals, chances are you'll want to use assembler programs to control them.

I can't teach you assembler in a single article. I can give you a tool—the TRS-80 Trainer—to make learning assembler a little easier. It is an assembler program that will run with changes to the I/O on any Z-80 computer, not just the TRS-80. The program instantly shows the result of nearly all the machine instructions which you're likely to find troublesome.

Getting the Program to Run

Obviously, you'll need an assembler. This is a not-so-subtle technique to get you into using assembly language quickly. This particular program is written for the Radio Shack Editor/Assembler, so you'll need to run out and buy one.

If you already have another assembler, you may have to make some changes in the code. They shouldn't be major, though. You'll also need a Level II TRS-80 with at least 16K.

All the information on getting the Editor/Assembler running is included in the Radio Shack manual. Since it is a system format tape you may have some trouble loading it. Be patient and keep turning the volume *down*. Some of the information about using the assembler won't make too much sense at first, but things should seem more clear after you've started to type in the program.

While you're typing the program, you'll be glad to know that the spaces in the code listing are actually tabs—the right-arrow on the keyboard. Naturally, spaces that are inside quotes are actually spaces. Just as in BASIC, comments can be deleted, but really shouldn't be.

Because this program uses many symbols, assemble it with the "/NS" option. This supresses the symbol table, and you can see how many typos you make. When the symbol table is displayed on the screen, it scrolls the error count off.

Once the program is error free, follow the instructions in the Editor/Assembler manual for creating a tape. Make sure you save the *source* with the "W" command as well.

Using the TRS-80 Trainer

You're now ready to run the TRS-80 Trainer. Your system format tape should have the TRS-80 Trainer on it. Fig. 1 shows how to load the tape and start up the program.

Displayed on Monitor	Comments
MEMORY SIZE? (cr)	
RADIO SHACK LEVEL II BASIC	
READY	
>SYSTEM (cr)	Puts the computer into system mode and allows it to read machine language tapes put out by the Assembler.
*? TRAIN (cr)	"TRAIN" is the name I used for the program when I assembled it.
*? /17152 (cr)	17152 is the decimal address of the first instruction in the Trainer. When you press ENTER the Trainer display comes on. (See Fig. 2.)

Fig. 1. How to load the TRS-80 Trainer.

```
A – 00000000 00   F – 00000000 00   A1 – 00000000 00   F1 – 00000000 00
B – 00000000 00   C – 00000000 00   B1 – 00000000 00   C1 – 00000000 00
D – 00000000 00   E – 00000000 00   D1 – 00000000 00   E1 – 00000000 00
H – 00000000 00   L – 00000000 00   H1 – 00000000 00   L1 – 00000000 00

                  I – 00000000 00   R – 00000000 00
                 IX – 0000000000000000 0000
                 IY – 0000000000000000 0000
                      INSTRUCTION:

Display format: Register name
                Binary representation of register contents
                Hexadecimal representation of register contents.
```

Fig. 2. TRS-80 Trainer Display.

Intelligent choice.

Now it's possible to turn your TRS-80 into an intelligent terminal—with the TermCom package from Statcom.

The TermCom package includes the hardware Level II users need for timesharing, and the software to convert it into an intelligent terminal. With TermCom, you can unload entire files and keep up to 13 screens full of data in the terminal, ready for instant use. TermCom also adds the convenience of scrolling, automatic formatting, buffer overflow protection, and the ability to lock data on part of the screen while using the rest.

The TermCom package is only $150. The software only is $50 on disc, $40 on cassette; documentation is $10. When you want to add timesharing, test equipment, serial printers, or other peripherals to your TRS-80 . . . TermCom is an intelligent choice.

✓189 **Statcom**
Corporation
5758 Balcones Dr., Suite 202
Austin, TX 78731 (512)451-0221

TRS-80 Owners!

Software that means Business
Available for immediate delivery

- Order Entry
- Invoicing
- Inventory Control
- Accounts Payable
- Accounts Receivable
- Payroll
- General Ledger
- Medical/Dental
- Sales/Marketing
- Stock Market
- Data Base System
- Word Processing
- Business Statistics
- Games
- Custom Business Programs

All Business Programs Operate With Printer.
Call or send for our complete catalog today.

Software Mart
24092 Pandora Street ✓286
El Toro, California 92630
(714) 768-7818

Radio Shack Dealer
Computer Systems Center

TRS-80*
SPECIAL

4K Level I was $499.00
NOW $440.00

16K Level II was $849.00
NOW $739.00

Available for immediate delivery.
Warranty honored at any Radio Shack.
Add $7.00 shipping and handling in continental U.S.A.
Tennessee residents add 6% sales tax.

Send check or money order to:

Radio Shack Dealer
103 Pico Court
Hendersonville, TN 37075
Phone 615-824-5762

✓256

*Tandy trademark.



$1.25 PER COPY

Computers & Gambling Magazine**

PRESENTS:
PROBABILITY HANDICAPPING DEVICE I
A TRS-80* LEVEL II BASIC PROGRAM FOR:
HORSE RACE HANDICAPPING!

****BE A WINNER:** READ COMPUTERS & GAMBLING MAGAZINE SAMPLE ISSUES $1.00

This amazing program was written by a professional software consultant to TRW Space Systems, and is being introduced by the publishers of Computers & Gambling Magazine. "PHD-I" is a large complex level II program requiring a full 16K. It is carefully human factored for easy use. PHD-I is a comprehensive horse racing system for picking overlays in thoroughbred sprint races (less that 1 mile). This system has been tested using hundreds of races from the daily racing form for both major and minor tracks in the U.S. It consistently yields a **large positive return.** Detailed printouts of our statistics are available. This program features:

- Automatic keyboard debounce
- Verification display of each horse's parameters prior to entry for easy error correction.
- The win probability and correct odds for each horse.
- Bubble-sort routine for final display
- Line printer output option
- Complete users manual with examples and tips on betting and money management.

Sit down with your TRS-80* and the daily racing form the night before the race and answer 5 or 6 questions about each horse's past performance. The computer then accurately predicts the win probability and odds-line for each horse allowing you to spot overlaid horses while at the track. The users manual contains a complete explanation of overlay betting.

ORDER NOW AT THIS SPECIAL INTRODUCTORY PRICE AND RECEIVE A COPY OF OUR MAGAZINE ABSOLUTELY FREE!
PHD-I 16k Level II Cassette $19.95

Make checks payable to:
Joe Computer
22713 Ventura Boulevard, Suite F ✓193
Woodland Hills, Calif. 91364

*TRS-80 is a registered trademark of Tandy Corporation

SUPERIOR SOFTWARE PACKAGES FOR THE DISK BASED **TRS-80***

SMARTTERM •$79.95
UNQUESTIONABLY THE BEST SMART TERMINAL PACKAGE FOR THE TRS-80
- •True Break Key
- •Auto Repeat (Typomatic) keys
- •Programmable 'soft' keys
- •Forward/Reverse Scrolling Multipage Display
- •Transmit from Disk File, Screen or Buffer
- •Receive to Disk File, Buffer or printer
- •Multi Protocol Capability

SPOOL-80 ● $39.95
A TRUE DISK-TO-PRINT DESPOOLER FOR THE TRS-80
- •Print Disk Files While Running Other Programs
- •Prints Compressed Basic Files
- •Includes RS-232 Driver for Serial Printers

CALL US FOR YOUR CUSTOM SOFTWARE REQUIREMENTS

MICRON, INC. ✓73
10045 Waterford Drive
Ellicott City, MD 21043
(301) 461-2721

Model II Versions Available Soon

*TRS-80 is a Trademark of Tandy Corp.

Your display (Fig. 2) shows all the Z-80's registers, except the stack pointer and program counter. They are all initialized to zero to make it easy to see the effects of the instructions you type.

At this point, I caution you: It is quite simple to blow up the Trainer. Entering jump instructions will do it, as will messing with the stack pointer. Storing things in RAM, where the program is (4300_{16} through 4760_{16}) can foul things up, too.

To use the Trainer, you have to know what kinds of input it accepts. There are exactly three. The hexadecimal digits zero through nine and letters A through F form allowable machine instructions. Secondly, the ENTER key tells the computer you want something EXECUTED. The third is the exclamation mark. If you make a typing error, press the "!", and your input will be erased. If you enter less than five bytes of machine instruction, you have to press ENTER to make the program execute them. Table 1 reviews these commands.

You've already seen that the Trainer sets all the registers to zero when you start out. With this in mind, type 3E01. Now press ENTER. You'll notice that the A register in the upper left hand corner of the display now contains a one. In this example, 3E is the machine code for "load the next byte into the A register". Of course, the byte this time is 01.

Now type in 0601 and press ENTER. A one appears in the B register. Type 80 and press ENTER. 80 is the machine instruction for "ADD the contents of register B to register A." If all is well, there should be two in register A.

With the TRS-80 Trainer you can enter up to five bytes of machine code at once. This example loads register A with five, register B with six and then adds the two. Note that as soon as you type the final zero, the computer displays the results. Try this by typing: 3E05060680.■

Input	Function/Use
!	Erases current instruction. Use it when you make a typing mistake.
ENTER	Signals the computer to execute the current instruction. If the instruction you have typed uses five bytes, the enter is not needed.
0-9, A-F	The hexadecimal digits used to input instructions to the TRS-80 Trainer.

Table 1. TRS-80 Trainer Input.


Program Listing

```
4300            00140          ORG     4300H
4300 218058     00150          LD      HL,SCRBUF
4303 115058     00160          LD      DE,SCRBUF+1
4306 010004     00170          LD      BC,400H
4309 3620       00180          LD      (HL),20H
430B EDB8       00190          LDIR
430D 215546     00200          LD      HL,TEXT
4310 111958     00210          LD      DE,SCRBUF+25
4313 010E00     00220          LD      BC,0EH
4316 EDB8       00230          LDIR
4318 115353     00240          LD      DE,SCRBUF+851
431B 010C00     00250          LD      BC,0CH
431E EDB8       00260          LDIR
4320 216F46     00270          LD      HL,L1
4323 118058     00280          LD      DE,SCRBUF+128
4326 013400     00290          LD      BC,52
4329 EDB8       00300          LDIR
432B 11C058     00310          LD      DE,SCRBUF+192
432E 013400     00320          LD      BC,52
4331 EDB8       00330          LDIR
4333 110059     00340          LD      DE,SCRBUF+256
4336 013400     00350          LD      BC,52
4339 EDB8       00360          LDIR
433B 114059     00370          LD      DE,SCRBUF+320
433E 013400     00380          LD      BC,52
4341 EDB8       00390          LDIR
4343 11D351     00400          LD      DE,SCRBUF+467
4346 011100     00410          LD      BC,17
4349 EDB8       00420          LDIR
434B 115452     00430          LD      DE,SCRBUF+596
434E 010300     00440          LD      BC,03H
4351 EDB8       00450          LDIR
4353 119452     00460          LD      DE,SCRBUF+660
4356 010300     00470          LD      BC,03H
4359 EDB8       00480          LDIR
                00490 ;THIS CODE PUTS USER REG VALUES IN THE DISPLAY
435B CD4145     00500 SHOW     CALL    HEXR    ;DISPLAY HEX VALUES
                00510 ;REST OF CODE DOES BINARY VALUES
435E 213558     00520          LD      HL,SCRBUF+131
4361 3A3E46     00530          LD      A,(SA)
4364 CD2346     00540          CALL    DISPR
4367 213558     00550          LD      HL,SCRBUF+147
436A 3A3D46     00560          LD      A,(SF)
436D CD2346     00570          CALL    DISPR
4370 21C350     00580          LD      HL,SCRBUF+195
4373 3A4046     00590          LD      A,(SB)
4376 CD2346     00600          CALL    DISPR
4379 21D350     00610          LD      HL,SCRBUF+211
437C 3A3F46     00620          LD      A,(SC)
437F CD2346     00630          CALL    DISPR
4382 210351     00640          LD      HL,SCRBUF+259
4385 3A4246     00650          LD      A,(SD)
4388 CD2346     00660          CALL    DISPR
438B 211351     00670          LD      HL,SCRBUF+275
438E 3A4146     00680          LD      A,(SE)
4391 CD2346     00690          CALL    DISPR
4394 214351     00700          LD      HL,SCRBUF+323
4397 3A4446     00710          LD      A,(SH)
439A CD2346     00720          CALL    DISPR
439D 215351     00730          LD      HL,SCRBUF+339
43A0 3A4346     00740          LD      A,(SL)
43A3 CD2346     00750          CALL    DISPR
43A6 21A458     00760          LD      HL,SCRBUF+164
43A9 3A4646     00770          LD      A,(SA1)
43AC CD2346     00780          CALL    DISPR
43AF 21B458     00790          LD      HL,SCRBUF+180
43B2 3A4546     00800          LD      A,(SF1)
43B5 CD2346     00810          CALL    DISPR
43B8 21E458     00820          LD      HL,SCRBUF+228
43BB 3A4846     00830          LD      A,(SB1)
43BE CD2346     00840          CALL    DISPR
43C1 21F458     00850          LD      HL,SCRBUF+244
43C4 3A4746     00860          LD      A,(SC1)
43C7 CD2346     00870          CALL    DISPR
43CA 212451     00880          LD      HL,SCRBUF+292
43CD 3A4A46     00890          LD      A,(SD1)
43D0 CD2346     00900          CALL    DISPR
43D3 213451     00910          LD      HL,SCRBUF+308
43D6 3A4946     00920          LD      A,(SE1)
43D9 CD2346     00930          CALL    DISPR
43DC 216451     00940          LD      HL,SCRBUF+356
43DF 3A4C46     00950          LD      A,(SH1)
43E2 CD2346     00960          CALL    DISPR
43E5 217451     00970          LD      HL,SCRBUF+372
43E8 3A4B46     00980          LD      A,(SL1)
43EB CD2346     00990          CALL    DISPR
43EE 21D551     01000          LD      HL,SCRBUF+469
43F1 3A5346     01010          LD      A,(SI)
43F4 CD2346     01020          CALL    DISPR
43F7 21E451     01030          LD      HL,SCRBUF+484
43FA 3A5446     01040          LD      A,(SR)
43FD CD2346     01050          CALL    DISPR
4400 215752     01060          LD      HL,SCRBUF+599
4403 3A4B46     01070          LD      A,(SIX+1)
4406 CD2346     01080          CALL    DISPR
4409 215F52     01090          LD      HL,SCRBUF+607
440C 3A4D46     01100          LD      A,(SIX)
440F CD2346     01110          CALL    DISPR
4412 219752     01120          LD      HL,SCRBUF+663
4415 3A5046     01130          LD      A,(SIY+1)
4418 CD2346     01140          CALL    DISPR
441B 219F52     01150          LD      HL,SCRBUF+671
441E 3A4F46     01160          LD      A,(SIY)
4421 CD2346     01170          CALL    DISPR
4424 CD8846     01180          CALL    MOVE    ;MOVE DISPLAY TO SCREEN
                01190 ;THIS SETS UP FOR ACCEPTING AN INSTRUCTION
                01200 ;HL -> DISPLAY AREA, DE -> EXECUTE B IS MAX BYTES
4427 21603F     01210          LD      HL,SCRTOP+864
442A 115947     01220          LD      DE,INSTR
442D 0605       01230          LD      B,5
442F C5         01240 READ     PUSH    BC
4430 CD9A44     01250          CALL    HXIN    ;READ ONE HEX BYTE
4433 C1         01260          POP     BC
4434 DA3B44     01270          JP      C,FINIS
4437 12         01280          LD      (DE),A
4438 13         01290          INC     DE
4439 10F4       01300          DJNZ    READ
                01310 ;NEXT CODE GETS USER REGS SET UP
443B ED735146   01320 FINIS    LD      (SSP),SP
443F 313D46     01330          LD      SP,SF
4442 3A5346     01340          LD      A,(SI)
4445 ED47       01350          LD      I,A
4447 3A5446     01360          LD      A,(SR)
444A ED4F       01370          LD      R,A
444C F1         01380          POP     AF
444D C1         01390          POP     BC
444E D1         01400          POP     DE
444F E1         01410          POP     HL
4450 08         01420          EX      AF,AF'
4451 D9         01430          EXX
4452 F1         01440          POP     AF
4453 C1         01450          POP     BC
4454 D1         01460          POP     DE
4455 E1         01470          POP     HL
4456 08         01480          EX      AF,AF'
4457 D9         01490          EXX
4458 DDE1       01500          POP     IX
445A FDE1       01510          POP     IY
445C ED7B5146   01520          LD      SP,(SSP)
4460 CD5947     01530          CALL    INSTR   ;EXECUTE USER INSTRUCTION
                01540 ;NEXT CODE SAVES USER REGS
4463 ED735146   01550          LD      (SSP),SP
4467 315146     01560          LD      SP,SIY+2
446A FDE5       01570          PUSH    IY
446C DDE5       01580          PUSH    IX
446E 08         01590          EX      AF,AF'
446F D9         01600          EXX
4470 E5         01610          PUSH    HL
4471 D5         01620          PUSH    DE
4472 C5         01630          PUSH    BC
4473 F5         01640          PUSH    AF
4474 08         01650          EX      AF,AF'
4475 D9         01660          EXX
4476 E5         01670          PUSH    HL
4477 D5         01680          PUSH    DE
4478 C5         01690          PUSH    BC
```

Program continues


IMMEDIATE DELIVERY — FROM ORANGE MICRO


TOLL FREE ORDERING



TELEVIDEO 912C
$799.00

BASE 2 PRINTER
$699.00





Digicom Coupler
ORIGINATE
$179.00

COMPARE QUALITY, FEATURES & DISCOUNT

STANDARD FEATURES (partial list)
- Reverse video, Underline, Blinking, Reduced
- Protected fields, Security Blank fields.
- Block or Conversational modes.
- Editing: Line or Character; Insert / Delete.
- Tab, Backtab; Columnar tab.
- 14 key numeric pad with return key.
- RS232 Printer Port
- Deluxe Selectric® Keyboard

OPTIONAL:
- 2nd Page Memory: $80.00
- 11 Special function keys and 8 edit keys: $70.00

FEATURES:
- 72, 80, 96, 120 or 132 Columns per line.
- Bi-directional, 7 dot matrix, impact.
- Graphics Capability.
- RS232, Centronics®, IEEE-488, 20 ma.
- 60 LPM / Fast feed.
- User Programmable Character Fonts.
- 16 Baud Rates — to 19,200.
- Expanded Characters.

Interfaces to TRS80, Apple, Atari, PET and most other computers.

✓296

QUME letter-perfect printer 45CPS, receive only **$2499.00**

TOLL FREE
(800) 854-8275
CALIF. ONLY (714) 630-3322

Orange Micro
P.O. Box 2076, Yorba Linda, CA 92686

master charge VISA

Phone orders WELCOME. Same day shipment for VISA and MASTER CHARGE. Personal checks require 2 weeks to clear. Add 3% for shipping and handling. CA residents add 6%. Manufacturer's warranty included. Prices subject to revision.

PPI-80

PARALLEL I/O FOR THE TRS-80

The PPI-80 is a complete parallel I/O interface designed specifically for the TRS-80, consisting of 3 complete 8 bit I/O ports including such features as:
- switch selectable address decoding
- complete on board regulated power supply
- TTL compatible I/O lines conveniently available through 16 pin sockets
- +5 volts and ground at each socket
- 3 software selectable modes of operation
- handshaking
- plugs into keyboard or expansion interface
- on board kluge area for experimenting
- provisions for interfacing Sears-BSR-RS home controller

Possible applications include:
- bidirectional communication between microcomputers
- parallel printer interface
- wireless home control via BSR home controller
- direct control of lights, appliances, and motors
- interfaces to many popular boards including A/D-D/A converter and an EPROM Programmer

PPI-80 is available now and can be purchased in several forms

Completely assembled and tested	$119.95
Complete kit with all parts	89.95
Bare board drilled and etched with assembly manual	25.95
Accessories	
8 channel A/D - 2 channel D/A by Optimal Technology	$115.00
EPROM Programmer Model EP-2A-79 by Optimal Technology	155.00

To order, send payment plus $2.00 shipping and handling to
QUANT SYSTEMS
P.O. BOX 628
CHARLESTON, S.C. 29402

SC residents add 4% sales tax
Overseas orders add $5 for shipping

✓269
Quant Systems
p.o. box 628
charleston sc
29402

TRS-80*

SAVE A BUNDLE

When you buy your TRS-80™ equipment!

Use our toll free number to check our price before you buy a TRS-80™ . . . anywhere!

TRS-80 is a trademark of the Radio Shack Division of Tandy Corporation

full Radio Shack warranty

✓148
SALES COMPANY
1412 WEST FAIRFIELD DR.
P.O. BOX 8098 PENSACOLA FL 32505
904/438-6507
nationwide 1-800-874-1551

TIRED OF PLAYING GAMES WITH YOUR TRS-80*?

Ready to let your personal computer do some real work for you? Then you're ready for MICROCHECK-80, an exceptionally useful and usable checking account handler for 16K Level II systems. Many products have lots of fancy glitter, but leave out essential functions. Not MICROCHECK-80! It gets the job done without unneeded gimmicks, using a minimum of hardware and human effort. The programs lead you step-by-step through each operation, and supporting documentation is excellent.

With MICROCHECK-80 your outstanding checks and deposits can be kept as current as desired, and month-end account balancing is a snap. Cancelled checks are stored on cassette, ready to be listed at any time on either the video display or, if you have one, a line printer. A special feature allows each check to be given a code identifying the category of expense (e.g., food, medical, contributions, etc.), and the codes supplied with the system are easily tailored to individual requirements. Cancelled checks can be listed by expense category, by month, by any combination of the two, or in total. Also, a summary of expense categories is provided. Checks are normally maintained in check number order, but another special feature permits sorting and listing by any field in the cancelled check record; these include date, amount, payee, and expense category.

Why not throw away your checkbook and let MICROCHECK-80 do the arithmetic and record-keeping for you? $19.95 postage paid. Send check of money order, or write for detailed information:

SUMA MICROWARE ✓267
1110 WEST 41st STREET
LA GRANGE, ILLINOIS 60525

* A trademark of Tandy Corporation

✓Reader Service — see page 162

Program continued

```
4479 F5        01700          PUSH    AF
447A ED57      01710          LD      A,I
447C 325346    01720          LD      (SI),A
447F ED5F      01730          LD      A,R
4481 325446    01740          LD      (SR),A
4484 ED7B5146  01750          LD      SP,(SSP)
4488 3E00      01760 CLEAR    LD      A,0     ;CLEAR USER INSTRUCTION AREA
448A 215947    01770          LD      HL,INSTR
448D 115A47    01780          LD      DE,INSTR+1
4490 010400    01790          LD      BC,4
4493 3600      01800          LD      (HL),0
4495 EDB0      01810          LDIR
4497 C35B43    01820          JP      SHOW    ;CONTINUE
               01830 ;THIS CODE ACCEPTS ONE HEXADECIMAL BYTE
               01840 ;A CARRIAGE RETURN ENDS CURRENT INSTRUCTION
449A CDD544    01850 HXIN     CALL    CHAR
449D FE0D      01860          CP      0DH
449F CACE44    01870          JP      Z,SETLST
44A2 32D344    01880          LD      (C1),A
44A5 CDD544    01890          CALL    CHAR
44A8 FE0D      01900          CP      0DH
44AA CACE44    01910          JP      Z,SETLST
44AD 32D444    01920          LD      (C2),A
44B0 3AD344    01930          LD      A,(C1)
44B3 CD0545    01940          CALL    HEXIT
44B6 CB27      01950          SLA     A
44B8 CB27      01960          SLA     A
44BA CB27      01970          SLA     A
44BC CB27      01980          SLA     A
44BE F5        01990          PUSH    AF
44BF 3AD444    02000          LD      A,(C2)
44C2 CD0545    02010          CALL    HEXIT
44C5 C1        02020          POP     BC
44C6 80        02030          ADD     A,B
44C7 47        02040          LD      B,A
44C8 3E00      02050          LD      A,0
44CA CB27      02060          SLA     A
44CC 78        02070          LD      A,B
44CD C9        02080          RET
44CE 3EFF      02090 SETLST   LD      A,0FFH
44D0 CB27      02100          SLA     A
44D2 C9        02110          RET
44D3 00        02120 C1       DEFB    0
44D4 00        02130 C2       DEFB    0
               02140 ;THIS CODE CALLS R.S. KEYBOARD ROUTINE
44D5 D5        02150 CHAR     PUSH    DE
44D6 FDE5      02160          PUSH    IY
44D8 CD2B00    02170 AGN      CALL    2BH
44DB B7        02180          OR      A
44DC 28FA      02190          JR      Z,AGN
               02200 ;IF NONZERO MAKE SURE IT'S HEX OR CR
44DE FDE1      02210          POP     IY
44E0 D1        02220          POP     DE
44E1 FE0D      02230          CP      0DH
44E3 CA0445    02240          JP      Z,RET2
44E6 FE21      02250          CP      21H
44E8 CA0F45    02260          JP      Z,KILLIT
44EB FE30      02270          CP      30H
44ED FAD544    02280          JP      M,CHAR
44F0 FE3A      02290          CP      3AH
44F2 F2F844    02300          JP      P,TRY41
44F5 FA0245    02310          JP      M,RET1
44F8 FE41      02320 TRY41    CP      41H
44FA FAD544    02330          JP      M,CHAR
44FD FE47      02340          CP      47H
44FF F2D544    02350          JP      P,CHAR
4502 77        02360 RET1     LD      (HL),A
4503 23        02370          INC     HL
4504 C9        02380 RET2     RET
4505 FE40      02390 HEXIT    CP      40H
4507 FA0C45    02400          JP      M,ZAPHI
450A C609      02410          ADD     A,9
450C E60F      02420 ZAPHI    AND     0FH
450E C9        02430          RET
450F F1        02440 KILLIT   POP     AF
4510 F1        02450          POP     AF
4511 C38844    02460          JP      CLEAR
4514 7E        02470 HEXOUT   LD      A,(HL)
4515 F5        02480          PUSH    AF
4516 CB3F      02490          SRL     A
4518 CB3F      02500          SRL     A
451A CB3F      02510          SRL     A
451C CB3F      02520          SRL     A
451E FE0A      02530          CP      0AH
4520 F22845    02540          JP      P,A1
4523 EE30      02550          XOR     30H
4525 C32C45    02560          JP      ST1
4528 D609      02570 A1       SUB     9
452A EE40      02580          XOR     40H
452C 12        02590 ST1      LD      (DE),A
452D 13        02600          INC     DE
452E F1        02610          POP     AF
452F E60F      02620          AND     0FH
4531 FE0A      02630          CP      10
4533 F23B45    02640          JP      P,A2
4536 EE30      02650          XOR     30H
4538 C33F45    02660          JP      ST2
453B D609      02670 A2       SUB     9
453D EE40      02680          XOR     40H
453F 12        02690 ST2      LD      (DE),A
4540 C9        02700          RET
               02710 ;NEXT CODE DOES HEX REGISTER DISPLAY
4541 213E46    02720 HEXR     LD      HL,SA
4544 110C50    02730          LD      DE,SCRBUF+140
4547 CD1445    02740          CALL    HEXOUT
454A 213D46    02750          LD      HL,SF
454D 119C50    02760          LD      DE,SCRBUF+156
4550 CD1445    02770          CALL    HEXOUT
4553 214646    02780          LD      HL,SA1
4556 11AD50    02790          LD      DE,SCRBUF+173
4559 CD1445    02800          CALL    HEXOUT
455C 214546    02810          LD      HL,SF1
455F 11BD50    02820          LD      DE,SCRBUF+189
4562 CD1445    02830          CALL    HEXOUT
4565 214046    02840          LD      HL,SB
4568 11CC50    02850          LD      DE,SCRBUF+204
456B CD1445    02860          CALL    HEXOUT
456E 213F46    02870          LD      HL,SC
4571 11DC50    02880          LD      DE,SCRBUF+220
4574 CD1445    02890          CALL    HEXOUT
4577 214846    02900          LD      HL,SB1
457A 11ED50    02910          LD      DE,SCRBUF+237
457D CD1445    02920          CALL    HEXOUT
4580 214746    02930          LD      HL,SC1
4583 11FD50    02940          LD      DE,SCRBUF+253
4586 CD1445    02950          CALL    HEXOUT
4589 214246    02960          LD      HL,SD
458C 110C51    02970          LD      DE,SCRBUF+268
458F CD1445    02980          CALL    HEXOUT
4592 214146    02990          LD      HL,SE
4595 111C51    03000          LD      DE,SCRBUF+284
4598 CD1445    03010          CALL    HEXOUT
459B 214A46    03020          LD      HL,SD1
459E 112D51    03030          LD      DE,SCRBUF+301
45A1 CD1445    03040          CALL    HEXOUT
45A4 214946    03050          LD      HL,SE1
45A7 113D51    03060          LD      DE,SCRBUF+317
45AA CD1445    03070          CALL    HEXOUT
45AD 214446    03080          LD      HL,SH
45B0 114C51    03090          LD      DE,SCRBUF+332
45B3 CD1445    03100          CALL    HEXOUT
45B6 214346    03110          LD      HL,SL
45B9 115C51    03120          LD      DE,SCRBUF+348
45BC CD1445    03130          CALL    HEXOUT
45BF 214C46    03140          LD      HL,SH1
45C2 116D51    03150          LD      DE,SCRBUF+365
45C5 CD1445    03160          CALL    HEXOUT
45C8 214B46    03170          LD      HL,SL1
45CB 117D51    03180          LD      DE,SCRBUF+381
45CE CD1445    03190          CALL    HEXOUT
45D1 215346    03200          LD      HL,SI
45D4 11DE51    03210          LD      DE,SCRBUF+478
45D7 CD1445    03220          CALL    HEXOUT
45DA 215446    03230          LD      HL,SR
45DD 11ED51    03240          LD      DE,SCRBUF+493
45E0 CD1445    03250          CALL    HEXOUT
45E3 214E46    03260          LD      HL,SIX+1
45E6 116852    03270          LD      DE,SCRBUF+616
45E9 CD1445    03280          CALL    HEXOUT
45EC 214D46    03290          LD      HL,SIX
45EF 116A52    03300          LD      DE,SCRBUF+618
45F2 CD1445    03310          CALL    HEXOUT
45F5 215046    03320          LD      HL,SIY+1
45F8 11A852    03330          LD      DE,SCRBUF+680
45FB CD1445    03340          CALL    HEXOUT
45FE 214F46    03350          LD      HL,SIY
4601 11AA52    03360          LD      DE,SCRBUF+682
4604 CD1445    03370          CALL    HEXOUT
4607 C9        03380          RET
               03390 ;THIS CODE MOVES SCREEN BUFFER TO R.S. SCREEN AREA
4608 210050    03400 MOVE     LD      HL,SCRBUF
460B 11003C    03410          LD      DE,3C00H
460E 010004    03420          LD      BC,400H
4611 EDB0      03430          LDIR
4613 C9        03440          RET
4614 215947    03450          LD      HL,INSTR
4617 115A47    03460          LD      DE,INSTR+1
461A 010400    03470          LD      BC,4
461D 3E00      03480          LD      A,0
461F 77        03490          LD      (HL),A
4620 EDB0      03500          LDIR
4622 C9        03510          RET
               03520 ;THIS CODE DOES BINARY REGISTER DISPLAY
4623 0608      03530 DISPR    LD      B,08H
4625 CB27      03540 SHIFT    SLA     A
4627 D43146    03550          CALL    NC,ZERO
462A DC3746    03560          CALL    C,ONE
462D 23        03570          INC     HL
462E 10F5      03580          DJNZ    SHIFT
4630 C9        03590          RET
4631 F5        03600 ZERO     PUSH    AF
4632 3E30      03610          LD      A,30H
4634 77        03620          LD      (HL),A
4635 F1        03630          POP     AF
4636 C9        03640          RET
4637 F5        03650 ONE      PUSH    AF
4638 3E31      03660          LD      A,31H
463A 77        03670          LD      (HL),A
463B F1        03680          POP     AF
463C C9        03690          RET
               03700 ;NEXT ARE USER REG STORAGE AREAS
463D 00        03710 SF       DEFB    0
463E 00        03720 SA       DEFB    0
463F 00        03730 SC       DEFB    0
4640 00        03740 SB       DEFB    0
4641 00        03750 SE       DEFB    0
4642 00        03760 SD       DEFB    0
4643 00        03770 SL       DEFB    0
4644 00        03780 SH       DEFB    0
4645 00        03790 SF1      DEFB    0
4646 00        03800 SA1      DEFB    0
4647 00        03810 SC1      DEFB    0
4648 00        03820 SB1      DEFB    0
4649 00        03830 SE1      DEFB    0
464A 00        03840 SD1      DEFB    0
464B 00        03850 SL1      DEFB    0
464C 00        03860 SH1      DEFB    0
464D 0000      03870 SIX      DEFW    0
464F 0000      03880 SIY      DEFW    0
4651 0000      03890 SSP      DEFW    0
4653 00        03900 SI       DEFB    0
4654 00        03910 SR       DEFB    0
               03920 ;FOLLOWING DEFINES SCREEN DISPLAY
4655 54        03930 TEXT     DEFM    'TRS-80 TRAINERINSTRUCTION:'
5000           03940 SCRBUF   EQU     5000H
466F 41        03950 L1       DEFM    'A -       F -       A1-       F1-'
46A3 42        03960          DEFM    'B -       C -       B1-       C1-'
46D7 44        03970          DEFM    'D -       E -       D1-       E1-'
470B 48        03980          DEFM    'H -       L -       H1-       L1-'
473F 49        03990          DEFM    'I-              R-'
4750 49        04000          DEFM    'IX-IY-SP-'
4759 0000      04010 INSTR    DEFW    0
475B 0000      04020          DEFW    0
475D 00        04030          DEFB    0
475E C9        04040          DEFB    0C9H
3C00           04050 SCRTOP   EQU     3C00H
0000           04060          END
00000 TOTAL ERRORS


A1      4528 02570   02540
A2      453B 02670   02640
AGN     44D8 02170   02190
C1      44D3 02120   01880 01930
C2      44D4 02130   01920 02000
CHAR    44D5 02150   01850 01890 02280 02330 02350
CLEAR   4488 01760   02460
DISPR   4623 03530   00540 00570 00600 00630 00660 00690 00720
                     00750 00780 00810 00840 00870 00900 00930
                     00960 00990 01020 01050 01080 01110 01140
                     01170
```

Program continues


Program continued

```
FINIS   443B 01320   01270
HEXIT   4585 02390   01940 02010
HEXOUT  4514 02470   02740 02770 02800 02830 02860 02890 02920
                     02950 02980 03010 03040 03070 03100 03130
                     03160 03190 03220 03250 03280 03310 03340
                     03370
HEXR    4541 02720   00500
HXIN    449A 01850   01250
INSTR   4759 04010   01220 01530 01770 01780 03450 03460
KILLIT  450F 02440   02260
L1      466F 03950   00270
MOVE    4608 03400   01100
ONE     4637 03650   03560
READ    442F 01240   01300
RET1    4502 02360   02310
RET2    4504 02380   02240
SA      463E 03720   00530 02720
SA1     4646 03800   00770 02780
SB      4648 03740   00590 02840
SB1     4648 03820   00830 02900
SC      463F 03730   00620 02870
SC1     4647 03810   00860 02930
SCRBUF  5000 03940   00150 00160 00210 00240 00280 00310 00340
                     00370 00400 00430 00460 00520 00550 00580
                     00610 00640 00670 00700 00730 00760 00790
                     00820 00850 00880 00910 00940 00970 01000
                     01030 01060 01090 01120 01150 02730 02760
                     02790 02820 02850 02880 02910 02940 02970
                     03000 03030 03060 03090 03120 03150 03180
                     03210 03240 03270 03300 03330 03360 03400
SCRTOP  3C00 04050   01210
SD      4642 03760   00650 02960
SD1     464A 03840   00890 03020
SE      4641 03750   00680 02990
SE1     4649 03830   00920 03050
SETLST  44CE 02090   01870 01910
SF      463D 03710   00560 01330 02750
SF1     4645 03790   00800 02810
SH      4644 03780   00710 03000
SH1     464C 03860   00950 03140
SHIFT   4625 03540   03500
SHOW    435B 00500   01020
SI      4653 03900   01010 01340 01720 03200
SIX     464D 03870   01070 01100 03260 03290
SIY     464F 03880   01130 01160 01560 03320 03350
SL      4643 03770   00740 03110
SL1     464B 03850   00980 03170
SR      4654 03910   01040 01360 01740 03230
SSP     4651 03890   01320 01520 01550 01750
ST1     452C 02590   02560
ST2     453F 02690   02660
TEXT    4655 03930   00200
TRY41   44F8 02320   02300
ZAPHI   450C 02420   02400
ZERO    4631 03600   03550
```


MICRO BUSINESS WORLD MAIL ORDER PHONE (213) 371-1660

NEC Model 3315 spinwriter

for the NEW TRS-80 word processing software




The SPINWRITER prints up to 55 characters per second. The unique print element, called a print thimble, contains up to 128 fully formed characters. Print thimbles that contain up to 125 characters have a cutout so that the last characters printed are fully visible to the operator. **$2,895**

DYSAN DISKETTES The CADILLAC of the Floppy Disks at these low prices

8" (box of 10) 3740/1 sgl side/sgl density **$ 4.50**
8" (box of 10) 3740/1D sgl side/dbl density **6.95**
5" (box of 5) 104/1 soft sector of 107/1 10 sectors or 105/1 16 sectors **4.50**

EPSON TX-80 DOT MATRIX PRINTER



64 Graphic characters. 7 5 dot matrix (7 6 in graphic) double width characters. TRACTOR and FRICTION feed models with interface and cable for PET, APPLE, RS232 available at OUR low prices.

TRS SOFTWARE: MICROSOFT ADVENTURE — The sophisticated fantasy/logic game . . . **Our low price $27.**

FILE MANAGEMENT SYSTEM — The professional data base software by the business software company . . . **$20.**

16K 4116 RAM for the **TRS-80, APPLE II, PET, ZENITH** and other computers set of 8 4116's 250 ns or better **$65.00**

Prices subject to change without notice. VISA and MASTER CHARGE WELCOME. Allow 2 weeks for cashiers check to clear, 4 weeks for personal checks. Add 2% for shipping and handling. Calif. residents add 6% sales tax. (Sorry, no C.O.D.)

Phone (213) 371-1660

MICRO BUSINESS WORLD
15818 Hawthorne Boulevard
Lawndale California 90260

Copyright 1980 • MICRO Business WORLD

✓250

TRS-80™ SOFTWARE

PACKER: Automatically edits all or part of your Basic program to ease editing, run faster, or save memory. Has 5 sections: UNPACK—unpacks multiple statement lines into single statements maintaining program logic; inserts spaces and renumbers lines for easier editing. SHORT—shortens your program by editing out all REM statements, unnecessary words and spaces. PACK—executes UNPACK and SHORT, then packs lines into multiple statement lines; maintains program logic. RENUM—renumbers program lines including all GOTO's, etc. You specify increment. MOVE—moves any line or block of lines to any new location in the program and renumbers lines. Written in machine language; supplied on tape in 3 versions for 16K, 32K, & 48K. For Level II or Disk Basic **$29.95**

DISASSEMBLER: Read, write, and copy system tapes. Display and modify memory contents. Disassemble ROM, DOS, and system tapes into Z-80 mnemonics. Search for strings in memory. Much more!! Includes 32 pages of documentation and information.
For 16K Level II **$19.95**

SYSTEM TAPE DUPLICATOR: Copy your system format tapes. Includes verify routine.
For any Level II **$14.95**

CHESDISK: Transfers your copy of Microchess to disk for quick and easy access.
For any Level II Disk system **$8.95**

CASSETTE LABEL MAKER: A mini-word processor to print cassette labels on a line printer. Includes manual and 50 peal-and-stick labels on tractor feed paper.
For 16K Level II and printer **$15.95**

INSTRUCTION MANUALS for any Cottage Software original programs available for 20% of program list price. Refundable when program purchased.

TRS-80™ repairs and modifications. Call or write for info. MANY MORE items available. Call or write for catalog. DEALER inquiries invited.

Kansas residents add 3% sales tax. Foreign orders in US Currency only.

Call our 24-hour phone: 316-683-4811 or write

"TRS-80 is a registered trademark of TANDY CORP."

COTTAGE SOFTWARE
614 N. Harding ✓233
Wichita, KS 67208

HEATH H14

TRS 80

NO SOFTWARE REQUIRED

Serial interface mounts inside and is powered by expansion interface. Connects at parallel printer port. Easy installation. May be used externally but requires +5 V and +/- 9 to 12 V.

Uses printer driver in Level II ROM. No software driver needed in high RAM. No more software compatability problems.

- RS-232-C Interface Free for Other Uses
- Baud Rate Adjustable From 1200 to 4800
- Handshaking Prevents Lost Characters
- Output Meets EIA RS-232-C

May be used with other serial printers which send Line Feed after Carriage Return. Data format is 1 Start Bit, 8 Data Bits, 2 Stop Bits.

--- Ordering Information ---

Kit With All Parts	$24.95
Printed Circuit Board With Instructions	12.95
Assembled & Tested With 90 Day Warranty	39.95


Please Include $1.50 Shipping and Handling

(NOTE: RS-232 Connector Not Supplied)

SPEEDWAY ELECTRONICS ✓275
1354 Auburn
Speedway, Indiana 46224

From The Engineering Group At GSIC:

DESIGNED FOR THE TRS-80 ™



CASSETTE REWINDER INTERFACE

NOW YOU CAN REWIND, FAST-FORWARD, OR INCREMENT YOUR TAPES EVEN WHEN NOT DOING A 'CLOAD', 'CSAVE' OR 'SYSTEM' COMMAND.

END THOSE CASSETTE TAPE HANDLING BLUES!

ONLY .. $14.95

WE PAY ALL SHIPPING AND HANDLING CHARGES.

FEATURES: Adapts instantly to present system, precision toggle and momentary push-button switches, durable painted aluminum cabinet, high quality micro-plug and jack, non-slip rubber feet, does not interfere with normal system operation, compact design complements your system.

SEND CHECK OR MONEY ORDER TO:
GRANITE STATE INSTRUMENT COMPANY ✓93
Box 3486
Nashua, NH 03061

(™ TRADEMARK OF TANDY CORPORATION)

✓Reader Service—see page 162

An additional index for Radio Shack's Editor/Assembler manual—cross-referenced for easy use.

EDTASM Index

Terry Kepner
P.O. Box 481
Peterborough, NH 03458

Learning to program in assembly code is like trying to learn a foreign language; how long it takes will depend upon how good a reference book you have.

If the book is well written with a good cross-reference listing the new words, their English equivalents and the pages where you can find their descriptions, you will learn the language more easily. If the book doesn't have these features, you have a hard trip ahead.

Unfortunately, the Radio Shack Editor/Assembler Manual falls into the latter category. While it does provide an alphabetic and a numeric opcode-mnemonic cross-reference list at the back, these two lists do not tell the user where their descriptions can be found.

It took only a few frustrating hours before I decided to rectify the situation and produce a good cross-referenced index. However, this proved more difficult than I had thought.

The numeric cross-reference in the Radio Shack Editor/Assembler is actually organized into three separate numeric lists. This meant, in addition to an alphabetic index, I also had to make a new numeric index, properly sorted.

Creating the index, I discovered some errors in the Radio Shack manual, which are detailed as follows:

1. The LD A,R (pg. 22) and LD R,A (pg. 23) mnemonics are not in the Radio Shack numeric and alphabetic indices.

2. OUT (D),R (pg. 103) should be OUT (C),R.

3. LD B,H,NN (pg. 121) should be LD B,H.

I hope these indices are as useful to you as they have been for me. Since I am a beginner at assembly language programming, the time it took to prepare them has been more than repaid by the time saved finding information. ■

OBJECT CODE	MNEMONICS		PAGE #
8E	ADC	A,(HL)	46
DD8E05	ADC	A,(IX+IND)	46
FD8E05	ADC	A,(IY+IND)	46
8F	ADC	A,A	46
88	ADC	A,B	46
89	ADC	A,C	46
8A	ADC	A,D	46
8B	ADC	A,E	46
8C	ADC	A,H	46
8D	ADC	A,L	46
CE20	ADC	A,N	46
ED4A	ADC	HL,BC	63
ED5A	ADC	HL,DE	63
ED6A	ADC	HL,HL	63
ED7A	ADC	HL,SP	63
86	ADD	A,(HL)	44
DD8605	ADD	A,(IX+IND)	44
FD8605	ADD	A,(IY+IND)	45
87	ADD	A,A	43
80	ADD	A,B	43
81	ADD	A,C	43
82	ADD	A,D	43
83	ADD	A,E	43
84	ADD	A,H	43
85	ADD	A,L	43
C620	ADD	A,N	43
09	ADD	HL,BC	63
19	ADD	HL,DE	63
29	ADD	HL,HL	63
39	ADD	HL,SP	63
DD09	ADD	IX,BC	64
DD19	ADD	IX,DE	64
DD29	ADD	IX,IX	64
DD39	ADD	IX,SP	64
FD09	ADD	IY,BC	65
FD19	ADD	IY,DE	65
FD29	ADD	IY,IY	65
FD39	ADD	IY,SP	65
A6	AND	(HL)	49
DDA605	AND	(IX+IND)	49
FDA605	AND	(IY+IND)	49
A7	AND	A	49
A0	AND	B	49
A1	AND	C	49
A2	AND	D	49
A3	AND	E	49
A4	AND	H	49
A5	AND	L	49
E620	AND	N	49
CB46	BIT	0,(HL)	81
DDCB0546	BIT	0,(IX+IND)	82
FDCB0546	BIT	0,(IY+IND)	82
CB47	BIT	0,A	81
CB40	BIT	0,B	81
CB41	BIT	0,C	81
CB42	BIT	0,D	81
CB43	BIT	0,E	81
CB44	BIT	0,H	81
CB45	BIT	0,L	81
CB4E	BIT	1,(HL)	81
DDCB054E	BIT	1,(IX+IND)	82
FDCB054E	BIT	1,(IY+IND)	82
CB4F	BIT	1,A	81
CB48	BIT	1,B	81
CB49	BIT	1,C	81
CB4A	BIT	1,D	81
CB4B	BIT	1,E	81
CB4C	BIT	1,H	81
CB4D	BIT	1,L	81
CB56	BIT	2,(HL)	81
DDCB0556	BIT	2,(IX+IND)	82
FDCB0556	BIT	2,(IY+IND)	82
CB57	BIT	2,A	81
CB50	BIT	2,B	81
CB51	BIT	2,C	81
CB52	BIT	2,D	81
CB53	BIT	2,E	81
CB54	BIT	2,H	81
CB55	BIT	2,L	81
CB5E	BIT	3,(HL)	81
DDCB055E	BIT	3,(IX+IND)	82
FDCB055E	BIT	3,(IY+IND)	82
CB5F	BIT	3,A	81
CB58	BIT	3,B	81
CB59	BIT	3,C	81
CB5A	BIT	3,D	81
CB5B	BIT	3,E	81
CB5C	BIT	3,H	81
CB5D	BIT	3,L	81
CB66	BIT	4,(HL)	81
DDCB0566	BIT	4,(IX+IND)	82
FDCB0566	BIT	4,(IY+IND)	82
CB67	BIT	4,A	81
CB60	BIT	4,B	81
CB61	BIT	4,C	81
CB62	BIT	4,D	81
CB63	BIT	4,E	81
CB64	BIT	4,H	81
CB65	BIT	4,L	81
CB6E	BIT	5,(HL)	81
DDCB056E	BIT	5,(IX+IND)	82
FDCB056E	BIT	5,(IY+IND)	82
CB6F	BIT	5,A	81
CB68	BIT	5,B	81
CB69	BIT	5,C	81
CB6A	BIT	5,D	81
CB6B	BIT	5,E	81
CB6C	BIT	5,H	81
CB6D	BIT	5,L	81
CB76	BIT	6,(HL)	81
DDCB0576	BIT	6,(IX+IND)	82
FDCB0576	BIT	6,(IY+IND)	82
CB77	BIT	6,A	81
CB70	BIT	6,B	81
CB71	BIT	6,C	81
CB72	BIT	6,D	81
CB73	BIT	6,E	81
CB74	BIT	6,H	81
CB75	BIT	6,L	81
CB7E	BIT	7,(HL)	81
DDCB057E	BIT	7,(IX+IND)	82
FDCB057E	BIT	7,(IY+IND)	82
CB7F	BIT	7,A	81
CB78	BIT	7,B	81
CB79	BIT	7,C	81
CB7A	BIT	7,D	81
CB7B	BIT	7,E	81
CB7C	BIT	7,H	81
CB7D	BIT	7,L	81
DC8405	CALL	C,NN	93
FC8405	CALL	M,NN	93
D48405	CALL	NC,NN	93
CD8405	CALL	NN	93
C48405	CALL	NZ,NN	93
F48405	CALL	P,NN	93
EC8405	CALL	PE,NN	93
E48405	CALL	PO,NN	93
CC8405	CALL	Z,NN	93
3F	CCF		58
BE	CP	(HL)	52
DDBE05	CP	(IX+IND)	52
FDBE05	CP	(IY+IND)	52
BF	CP	A	52
B8	CP	B	52
B9	CP	C	52
BA	CP	D	52
BB	CP	E	52
BC	CP	H	52
BD	CP	L	52
FE20	CP	N	52
EDA9	CPD		42
EDB9	CPDR		42
EDA1	CPI		41
EDB1	CPIR		41
2F	CPL		57
27	DAA		56
35	DEC	(HL)	55
DD3505	DEC	(IX+IND)	55
FD3505	DEC	(IY+IND)	55
3D	DEC	A	55
05	DEC	B	55
0B	DEC	BC	67
0D	DEC	C	55
15	DEC	D	55
1B	DEC	DE	67
1D	DEC	E	55
25	DEC	H	55
2B	DEC	HL	67
DD2B	DEC	IX	67
FD2B	DEC	IY	68
2D	DEC	L	55
3B	DEC	SP	67
F3	DI		60
102E	DJNZ	DIS	91
FB	EI		60
E3	EX	(SP),HL	35
DDE3	EX	(SP),IX	36
FDE3	EX	(SP),IY	36
08	EX	AF,AF'	34
EB	EX	DE,HL	34
D9	EXX		35
76	HALT		59
ED46	IM	0	61
ED56	IM	1	61
ED5E	IM	2	62
ED78	IN	A,(C)	98
DB20	IN	A,(N)	98
ED40	IN	B,(C)	98
ED48	IN	C,(C)	98
ED50	IN	D,(C)	98
ED58	IN	E,(C)	98

STARFLEET ORION



A specially designed SF TACTICAL BATTLE GAME for your PET, TRS-80 or APPLE Computer.

The man called Sudden Smith watched the five blips on his screen spread out to meet the enemy. Two freighters converted into something like battlewagons, powerful but slow, and three real cruisers: the most powerful group of warships ever seen near the Promethean system — except for the Stellar Union fleet opposing them. Everyone was calling it Starfleet Orion, though it existed for only this day. It was life or death, and, after the object lesson on the planet Spring, everyone knew it.

STARFLEET ORION is a complete 2 player game system

- rule book
- battle manual
- cassette
- ship control sheets
- program listings

Includes 2 programs, 22 space ship types, and 12 playtested scenarios. Game mechanics are extremely simple, but play is exciting, challenging, and rich in detail. **Specify PET (8K), TRS-80 (Level II, 16K), or APPLE II (16K & 32K) $19.95.**

Ask your local dealer or send your check to:

Automated Simulations
Department M ✓48
P.O. Box 4232
Mountain View, CA. 94040

"TRS-80 is a registered trademark of TANDY CORP."

California residents please add 6% sales tax

S&M SYSTEMS, INC. ✓154

PROFESSIONAL BUSINESS SOFTWARE TO OPERATE ON TRS-80* COMPUTER

- **ISAM Accounting Package:** **
  - Accounts Payable, Accounts Receivable, General Ledger with Cash Journal, Invoicing and Payroll

  Integrated Accounting System $425.00

  Separate Modules $ 99.00
- **ISAM Inventory Control** $125.00
- Above Systems require 2 - 3 drive Systems.
- Integrated System requires 3 - 4 drive Systems.
- Systems operate under NEWDOS by Apparat (not included)
- **Machine Language Disk Sort** $ 49.95
  - Multiple Keys - Ascending, Descending Callable under Basic
- **NEWDOS by Apparat** $ 55.00

master charge

TO ORDER CALL:
(617) 685-0151
(Dealer Inquiries Welcome)

BANK AMERICARD VISA

P.O. Box 1225 • Haverhill, MA 01830

* Trademark of Tandy Corporation

** Accounting Package not available in the State of California.

QUICKSET

GET YOUR WARP SPEED UP



FOR REALLY FAST TRS-80*

GRAPHICS

- A cassette SOFTWARE addition to your TRS-80* level II BASIC.
- Lets you draw graphics with your computer the same way you draw on paper.
- Draw shapes, large alphabetical characters, etc. *ten* times faster, more easily and using less memory then level II.
- SETs one graphic spot at a time.
- Does not use strings or POKE.
- Can be EDITed and SAVEd just like any other BASIC statement.
- Draw the starship ENTERPRISE, above, beginning at any point on the screen, in 0.3 seconds (TRS-80 takes 4 seconds and uses twice as much memory).
- No effect on your warranty.

WINKING CURSOR

- Play this cassette program into your TRS-80* and the cursor starts winking.
- Also debounces your keyboard.
- It keeps on winking until you turn the machine off (not affected by NEW).

QS-1 QUICKSET on cassette	$7.95
WC-1 WINKING CURSOR on cassette	$4.95
QW-1 Both on one cassette	$9.95

Add $1.00 per order handling charge.
(PA residents—add 6% tax)

✓249

JMS Corp
P.O. Box 18083 Pittsburgh, PA. 15236
(412) 655-7017

* TRS-80 is a trademark of the Radio Shack Division of Tandy Corporation.

JOIN THE FUN!



You have traveled nine miles today and still have 116 to go before you reach the other side of the ship. You are dead tired, your strength half gone, and just as you decide to rest, out from a nook steps the most deadly foe you've faced so far: a giant killer tomato!!! You really don't need this, especially after the Nazgul and Cylon you just fought, but you have no choice in the matter... The tomato is attacking!

PHASE VII TM

is the game of SCIENCE FICTION and Fantasy. It is the most unusual game you will ever play. The setting is a space station controlled by a runaway computer, and your goal is to survive. PHASE VII is not an adventure game. Every game you play is different, and as you play you become stronger and more powerful. Using both the powers of science and magic, the game is fast-paced and exciting. PHASE VII has been approved by the MISSOURI SOUTHERN STATE COLLEGE SCIENCE FICTION CLUB and is backed by two years of testing. So Join the Fun! Don't be the last on your block to be killed by a B.E.M.!*

To order, make check payable to PHASE VII and mail to: FUTUREVIEW UNLIMITED
P.O. Box 1295 Joplin, MO. 64801 ✓279

Please specify your computer:

TRS-80 LEVEL II 16K, OR 32K
APPLE II PLUS 16K, OR 32K } $24.95
APPLE II w/Applesoft ROM 16K OR 32K
TRS-80 MOD II (yes, a game for MII!) $34.95
Dealers, send S.A.S.E. for price list.

* BUG-EYED-MONSTER PHONE (417) 782-0880

IMMEDIATE DELIVERY GUARANTEED!

Calligraphy by Drew

TRS-80* STRUCTURED BASIC

Now available for TRS-80 disk systems

SBASIC

A pre-compiler adding performed procedures, case structures, repeat while, until and many other structured language statements to the already powerful Level II BASIC. Diskette $50.00, Listing $35.00, Manual purchased separately $10.00.

ULTIMATE COMPUTER SYSTEMS

313 Meadow Lane
Hastings, Michigan 49058
(616) 945-5334
(Dealer inquiries invited)

✓84

VISA & MASTERCHARGE ACCEPTED

*TRS-80 is a trademark of Tandy Corp.

✓Reader Service—see page 162

OBJECT CODE	MNEMONICS		PAGE #
ED60	IN	H,(C)	98
ED68	IN	L,(C)	98
34	INC	(HL)	53
DD3405	INC	(IX+IND)	54
FD3405	INC	(IY+IND)	54
3C	INC	A	53
04	INC	B	53
03	INC	BC	65
0C	INC	C	53
14	INC	D	53
13	INC	DE	65
1C	INC	E	53
24	INC	H	53
23	INC	HL	65
DD23	INC	IX	66
FD23	INC	IY	66
2C	INC	L	53
33	INC	SP	65
EDAA	IND		101
EDBA	INDR		102
EDA2	INI		99
EDB2	INIR		100
E9	JP	(HL)	89
DDE9	JP	(IX)	90
FDE9	JP	(IY)	90
DA8405	JP	C,NN	86
FA8405	JP	M,NN	86
D28405	JP	NC,NN	86
C38405	JP	NN	86
C28405	JP	NZ,NN	86
F28405	JP	P,NN	86
EA8405	JP	PE,NN	86
E28405	JP	PO,NN	86
CA8405	JP	Z,NN	86
382E	JR	C,DIS	87
182E	JR	DIS	87
302E	JR	NC,DIS	88
202E	JR	NZ,DIS	89
282E	JR	Z,DIS	88
02	LD	(BC),A	20
12	LD	(DE),A	20
77	LD	(HL),A	15
70	LD	(HL),B	15
71	LD	(HL),C	15
72	LD	(HL),D	15
73	LD	(HL),E	15
74	LD	(HL),H	15
75	LD	(HL),L	15
3620	LD	(HL),N	17
DD7705	LD	(IX+IND),A	16
DD7005	LD	(IX+IND),B	16
DD7105	LD	(IX+IND),C	16
DD7205	LD	(IX+IND),D	16
DD7305	LD	(IX+IND),E	16
DD7405	LD	(IX+IND),H	16
DD7505	LD	(IX+IND),L	16
DD360520	LD	(IX+IND),N	17
FD7705	LD	(IY+IND),A	16
FD7005	LD	(IY+IND),B	16
FD7105	LD	(IY+IND),C	16
FD7205	LD	(IY+IND),D	16
FD7305	LD	(IY+IND),E	16
FD7405	LD	(IY+IND),H	16
FD7505	LD	(IY+IND),L	16
FD360520	LD	(IY+IND),N	18
328405	LD	(NN),A	21
ED438405	LD	(NN),BC	28
ED538405	LD	(NN),DE	28
228405	LD	(NN),HL	27,28
DD228405	LD	(NN),IX	28
FD228405	LD	(NN),IY	29
ED738405	LD	(NN),SP	28
0A	LD	A,(BC)	18
1A	LD	A,(DE)	19
7E	LD	A,HL	14
DD7E05	LD	A,(IX+IND)	14
FD7E05	LD	A,(IY+IND)	15
3A8405	LD	A,(NN)	19
7F	LD	A,A	13
78	LD	A,B	13
79	LD	A,C	13
7A	LD	A,D	13
7B	LD	A,E	13
7C	LD	A,H	13
ED57	LD	A,I	21
7D	LD	A,L	13
3E20	LD	A,N	13
ED5F	LD	A,R	22
46	LD	B,(HL)	14
DD4605	LD	B,(IX+IND)	14
FD4605	LD	B,(IY+IND)	15
47	LD	B,A	13
40	LD	B,B	13
41	LD	B,C	13
42	LD	B,D	13
43	LD	B,E	13
44	LD	B,H	13
45	LD	B,L	13
0620	LD	B,N	13
ED4B8405	LD	BC,(NN)	26
018405	LD	BC,NN	24
4E	LD	C,(HL)	14
DD4E05	LD	C,(IX+IND)	14
FD4E05	LD	C,(IY+IND)	15
4F	LD	C,A	13
48	LD	C,B	13
49	LD	C,C	13
4A	LD	C,D	13
4B	LD	C,E	13
4C	LD	C,H	13
4D	LD	C,L	13
0E20	LD	C,N	13
56	LD	D,(HL)	14
DD5605	LD	D,(IX+IND)	14
FD5605	LD	D,(IY+IND)	15
57	LD	D,A	13
50	LD	D,B	13
51	LD	D,C	13
52	LD	D,D	13
53	LD	D,E	13
54	LD	D,H	13
55	LD	D,L	13

OBJECT CODE	MNEMONICS		PAGE #
1620	LD	D,N	13
ED5B8405	LD	DE,(NN)	26
118405	LD	DE,NN	24
5E	LD	E,(HL)	14
DD5E05	LD	E,(IX+IND)	14
FD5E05	LD	E,(IY+IND)	15
5F	LD	E,A	13
58	LD	E,B	13
59	LD	E,C	13
5A	LD	E,D	13
5B	LD	E,E	13
5C	LD	E,H	13
5D	LD	E,L	13
1E20	LD	E,N	13
66	LD	H,(HL)	14
DD6605	LD	H,(IX+IND)	14
FD6605	LD	H,(IY+IND)	15
67	LD	H,A	13
60	LD	H,B	13
61	LD	H,C	13
62	LD	H,D	13
63	LD	H,E	13
64	LD	H,H	13
65	LD	H,L	13
2620	LD	H,N	13
2A8405	LD	HL,(NN)	25,26
218405	LD	HL,NN	24
ED47	LD	I,A	22
DD2A8405	LD	IX,(NN)	26
DD218405	LD	IX,NN	24
FD2A8405	LD	IY,(NN)	27
FD218405	LD	IY,NN	25
6E	LD	L,(HL)	14
DD6E05	LD	L,(IX+IND)	14
FD6E05	LD	L,(IY+IND)	15
6F	LD	L,A	13
68	LD	L,B	13
69	LD	L,C	13
6A	LD	L,D	13
6B	LD	L,E	13
6C	LD	L,H	13
6D	LD	L,L	13
2E20	LD	L,N	13
ED4F	LD	R,A	23
ED7B8405	LD	SP,(NN)	26
F9	LD	SP,HL	29
DDF9	LD	SP,IX	30
FDF9	LD	SP,IY	30
318405	LD	SP,NN	24
EDA8	LDD		39
EDB8	LDDR		40
EDA0	LDI		37
EDB0	LDIR		38
ED44	NEG		57
00	NOP		59
B6	OR	(HL)	50
DDB605	OR	(IX+IND)	50
FDB605	OR	(IY+IND)	50
B7	OR	A	50
B0	OR	B	50
B1	OR	C	50
B2	OR	D	50
B3	OR	E	50
B4	OR	H	50
B5	OR	L	50
F620	OR	N	50
EDBB	OTDR		107
EDB3	OTIR		105
ED79	OUT	(C),A	103
ED41	OUT	(C),B	103
ED49	OUT	(C),C	103
ED51	OUT	(C),D	103
ED59	OUT	(C),E	103
ED61	OUT	(C),H	103
ED69	OUT	(C),L	103
D320	OUT	(N),A	103
EDAB	OUTD		106
EDA3	OUTI		104
F1	POP	AF	32
C1	POP	BC	32
D1	POP	DE	32
E1	POP	HL	32
DDE1	POP	IX	33
FDE1	POP	IY	33
F5	PUSH	AF	31
C5	PUSH	BC	31
D5	PUSH	DE	31
E5	PUSH	HL	31
DDE5	PUSH	IX	31
FDE5	PUSH	IY	32
CB86	RES	0,(HL)	85
DDCB0586	RES	0,(IX+IND)	85
FDCB0586	RES	0,(IY+IND)	85
CB87	RES	0,A	85
CB80	RES	0,B	85
CB81	RES	0,C	85
CB82	RES	0,D	85
CB83	RES	0,E	85
CB84	RES	0,H	85
CB85	RES	0,L	85
CB8E	RES	1,(HL)	85
DDCB058E	RES	1,(IX+IND)	85
FDCB058E	RES	1,(IY+IND)	85
CB8F	RES	1,A	85
CB88	RES	1,B	85
CB89	RES	1,C	85
CB8A	RES	1,D	85
CB8B	RES	1,E	85
CB8C	RES	1,H	85
CB8D	RES	1,L	85
CB96	RES	2,(HL)	85
DDCB0596	RES	2,(IX+IND)	85
FDCB0596	RES	2,(IY+IND)	85
CB97	RES	2,A	85
CB90	RES	2,B	85
CB91	RES	2,C	85
CB92	RES	2,D	85
CB93	RES	2,E	85
CB94	RES	2,H	85
CB95	RES	2,L	85
CB9E	RES	3,(HL)	85
DDCB059E	RES	3,(IX+IND)	85

OBJECT CODE	MNEMONICS		PAGE #
FDCB059E	RES	3,(IY+IND)	85
CB9F	RES	3,A	85
CB98	RES	3,B	85
CB99	RES	3,C	85
CB9A	RES	3,D	85
CB9B	RES	3,E	85
CB9C	RES	3,H	85
CB9D	RES	3,L	85
CBA6	RES	4,(HL)	85
DDCB05A6	RES	4,(IX+IND)	85
FDCB05A6	RES	4,(IY+IND)	85
CBA7	RES	4,A	85
CBA0	RES	4,B	85
CBA1	RES	4,C	85
CBA2	RES	4,D	85
CBA3	RES	4,E	85
CBA4	RES	4,H	85
CBA5	RES	4,L	85
CBAE	RES	5,(HL)	85
DDCB05AE	RES	5,(IX+IND)	85
FDCB05AE	RES	5,(IY+IND)	85
CBAF	RES	5,A	85
CBA8	RES	5,B	85
CBA9	RES	5,C	85
CBAA	RES	5,D	85
CBAB	RES	5,E	85
CBAC	RES	5,H	85
CBAD	RES	5,L	85
CBB6	RES	6,(HL)	85
DDCB05B6	RES	6,(IX+IND)	85
FDCB05B6	RES	6,(IY+IND)	85
CBB7	RES	6,A	85
CBB0	RES	6,B	85
CBB1	RES	6,C	85
CBB2	RES	6,D	85
CBB3	RES	6,E	85
CBB4	RES	6,H	85
CBB5	RES	6,L	85
CBBE	RES	7,(HL)	85
DDCB05BE	RES	7,(IX+IND)	85
FDCB05BE	RES	7,(IY+IND)	85
CBBF	RES	7,A	85
CBB8	RES	7,B	85
CBB9	RES	7,C	85
CBBA	RES	7,D	85
CBBB	RES	7,E	85
CBBC	RES	7,H	85
CBBD	RES	7,L	85
C9	RET		94
D8	RET	C	95
F8	RET	M	95
D0	RET	NC	95
C0	RET	NZ	95
F0	RET	P	95
E8	RET	PE	95
E0	RET	PO	95
C8	RET	Z	95
ED4D	RETI		96
ED4455	RETN		96
CB16	RL	(HL)	73
DDCB0516	RL	(IX+IND)	73
FDCB0516	RL	(IY+IND)	73
CB17	RL	A	73
CB10	RL	B	73
CB11	RL	C	73
CB12	RL	D	73
CB13	RL	E	73
CB14	RL	H	73
CB15	RL	L	73
17	RLA		69
CB06	RLC	(HL)	71
DDCB0506	RLC	(IX+IND)	72
FDCB0506	RLC	(IY+IND)	72
CB07	RLC	A	71
CB00	RLC	B	71
CB01	RLC	C	71
CB02	RLC	D	71
CB03	RLC	E	71
CB04	RLC	H	71
CB05	RLC	L	71
07	RLCA		69
ED6F	RLD		79
CB1E	RR	(HL)	75
DDCB051E	RR	(IX+IND)	75
FDCB051E	RR	(IY+IND)	75
CB1F	RR	A	75
CB18	RR	B	75
CB19	RR	C	75
CB1A	RR	D	75
CB1B	RR	E	75
CB1C	RR	H	75
CB1D	RR	L	75
1F	RRA		70
CB0E	RRC	(HL)	74
DDCB050E	RRC	(IX+IND)	74
FDCB050E	RRC	(IY+IND)	74
CB0F	RRC	A	74
CB08	RRC	B	74
CB09	RRC	C	74
CB0A	RRC	D	74
CB0B	RRC	E	74
CB0C	RRC	H	74
CB0D	RRC	L	74
0F	RRCA		70
ED67	RRD		80
C7	RST	0	97
D7	RST	10H	97
DF	RST	18H	97
E7	RST	20H	97
EF	RST	28H	97
F7	RST	30H	97
FF	RST	38H	97
CF	RST	8	97
9E	SBC	A,(HL)	48
DD9E05	SBC	A,(IX+IND)	48
FD9E05	SBC	A,(IY+IND)	48
9F	SBC	A,A	48
98	SBC	A,B	48
99	SBC	A,C	48
9A	SBC	A,D	48
9B	SBC	A,E	48
9C	SBC	A,H	48

OBJECT CODE	MNEMONICS		PAGE #
9D	SBC	A,L	48
DE20	SBC	A,N	48
ED42	SBC	HL,BC	64
ED52	SBC	HL,DE	64
ED62	SBC	HL,HL	64
ED72	SBC	HL,SP	64
37	SCF		58
CBC6	SET	0,(HL)	83
DDCB05C6	SET	0,(IX+IND)	84
FDCB05C6	SET	0,(IY+IND)	84
CBC7	SET	0,A	83
CBC0	SET	0,B	83
CBC1	SET	0,C	83
CBC2	SET	0,D	83
CBC3	SET	0,E	83
CBC4	SET	0,H	83
CBC5	SET	0,L	83
CBCE	SET	1,(HL)	83
DDCB05CE	SET	1,(IX+IND)	84
FDCB05CE	SET	1,(IY+IND)	84
CBCF	SET	1,A	83
CBC8	SET	1,B	83
CBC9	SET	1,C	83
CBCA	SET	1,D	83
CBCB	SET	1,E	83
CBCC	SET	1,H	83
CBCD	SET	1,L	83
CBD6	SET	2,(HL)	83
DDCB05D6	SET	2,(IX+IND)	84
FDCB05D6	SET	2,(IY+IND)	84
CBD7	SET	2,A	83
CBD0	SET	2,B	83
CBD1	SET	2,C	83
CBD2	SET	2,D	83
CBD3	SET	2,E	83
CBD4	SET	2,H	83
CBD5	SET	2,L	83
CBD8	SET	3,B	83
CBDE	SET	3,(HL)	83
DDCB05DE	SET	3,(IX+IND)	84
FDCB05DE	SET	3,(IY+IND)	84
CBDF	SET	3,A	83
CBD9	SET	3,C	83
CBDA	SET	3,D	83
CBDB	SET	3,E	83
CBDC	SET	3,H	83
CBDD	SET	3,L	83
CBE6	SET	4,(HL)	83
DDCB05E6	SET	4,(IX+IND)	84
FDCB05E6	SET	4,(IY+IND)	84
CBE7	SET	4,A	83
CBE0	SET	4,B	83
CBE1	SET	4,C	83
CBE2	SET	4,D	83
CBE3	SET	4,E	83
CBE4	SET	4,H	83
CBE5	SET	4,L	83
CBEE	SET	5,(HL)	83
DDCB05EE	SET	5,(IX+IND)	84
FDCB05EE	SET	5,(IY+IND)	84
CBEF	SET	5,A	83
CBE8	SET	5,B	83
CBE9	SET	5,C	83
CBEA	SET	5,D	83
CBEB	SET	5,E	83
CBEC	SET	5,H	83
CBED	SET	5,L	83
CBF6	SET	6,(HL)	83
DDCB05F6	SET	6,(IX+IND)	84
FDCB05F6	SET	6,(IY+IND)	84
CBF7	SET	6,A	83
CBF0	SET	6,B	83
CBF1	SET	6,C	83
CBF2	SET	6,D	83
CBF3	SET	6,E	83
CBF4	SET	6,H	83
CBF5	SET	6,L	83
CBFE	SET	7,(HL)	83
DDCB05FE	SET	7,(IX+IND)	84
FDCB05FE	SET	7,(IY+IND)	84
CBFF	SET	7,A	83
CBF8	SET	7,B	83
CBF9	SET	7,C	83
CBFA	SET	7,D	83
CBFB	SET	7,E	83
CBFC	SET	7,H	83
CBFD	SET	7,L	83
CB26	SLA	(HL)	76
DDCB0526	SLA	(IX+IND)	76
FDCB0526	SLA	(IY+IND)	76
CB27	SLA	A	76
CB20	SLA	B	76
CB21	SLA	C	76
CB22	SLA	D	76
CB23	SLA	E	76
CB24	SLA	H	76
CB25	SLA	L	76
CB2E	SRA	(HL)	77
DDCB052E	SRA	(IX+IND)	77
FDCB052E	SRA	(IY+IND)	77
CB2F	SRA	A	77
CB28	SRA	B	77
CB29	SRA	C	77
CB2A	SRA	D	77
CB2B	SRA	E	77
CB2C	SRA	H	77
CB2D	SRA	L	77
CB3E	SRL	(HL)	78
DDCB053E	SRL	(IX+IND)	78
FDCB053E	SRL	(IY+IND)	78
CB3F	SRL	A	78
CB38	SRL	B	78
CB39	SRL	C	78
CB3A	SRL	D	78
CB3B	SRL	E	78
CB3C	SRL	H	78
CB3D	SRL	L	78
96	SUB	(HL)	47
DD9605	SUB	(IX+IND)	47
FD9605	SUB	(IY+IND)	47
97	SUB	A	47
90	SUB	B	47

PROFIT WITH MICRO COMPUTERS

Shouldn't investing in a Micro Computer yield a profit? *CLUB SOFT* Investment Analysis programs pay off immediately with time, simplicity, and utility gains. Developed by programing specialist for Professionals:

REAL ESTATE EVALUATION
BOND COMPARISON
LIQUID MONEY MARKET FUNDS
LOAN COMPARITOR/SCHEDULOR
STOCK PORTFOLIO MANAGER

Price $39.95 each
All FIVE and an Inflation Analysis Program for

$199.95
Available for all TRS 80 level II systems and up.

CONTACT:

Club Soft ✓281

P.O. Box 2355
Fitchburg, Ma. 01420
Phone (617) 342-5300
A Division of FERMAC

REAL ESTATE



EVALUATION

Experts agree **REAL ESTATE INVESTMENTS** are shelter against inflation today. But with increasing interest rates, profitable investing takes accurate information. **CLUB SOFT'S REAL ESTATE ANALYSER** allows accurate easy comparison of over **THIRTY** properties **SIMULTANEOUSLY**. With simple controls the program can evaluate:

- **CAPITAL GAIN**
- **MONTHLY RETURN**
- **TAXES**
- **MORTAGE PAYMENTS**
- **REPAIR COSTS**
- **FAIR MARKET VALUE**
- **CLOSING COSTS**
- **SECONDARY MORT.**
- **UTILITY COST**
- **RENT LEVELS**

OVER 40 OTHER VARIABLES

Graphic projection changes in any quantity.

Useful to Buyers, Sellers, Brokers, and Investors.

PRICE $39.95

Available for TRS-80 16K Level and up.

Contact:

Club Soft ✓281
P.O. Box 2355
Fitchburg, Ma.
A Division of FERMAC

3M COMPANY



5¼" Diskettes	10	50	100
3M-744-0	3.15	2.95	2.85
Verbatim 525-01	2.65	2.45	2.30
8" Diskettes			
3M-740	3.05	2.85	2.75
8" Double Density			
3M-741	4.15	3.95	3.80

Diskette Storage Pages 10/3.95
Plastic Library Cases 5" – 1.95 8" – 2.85

CASSETTE TAPES – Agfa PE 611
Premium quality in superior 5 screw housing.

C-10	10/5.65	50/25.00	100/48.00
C-20	10/6.90	50/30.00	100/57.00

TRS-80 Adventures by Scott Adams
Machine Language Classics for 16K.
Seven Adventures currently available.
SALE! $12.90 each, 3 for $35.00.

NEW **SARGON II Chess** (TRS-80 cassette)
regular price $29.95 — our price $24.90

Add $1 per order for shipping. We pay balance (UPS surface) on all prepaid orders.

"TRS-80 is a registered trademark of TANDY CORP."

A B COMPUTERS
115 E. STUMP RD.
MONTGOMERYVILLE, PA. 18936
(215) 699-5826 ✓81

WRITE FOR COMPLETE CATALOG

AUTOMATICALLY SORT your records as you enter them.

Machine Language ISAM accessible with Basic Language.

TRS-80* Model I (32K + 48K)
Model II (64K)

Average RECORD RETRIEVAL TIME 1/10th of a second using a 4,000 record file
Also allows you to add/delete records

Allows you to work with 4 data files simultaneously.

Price:

MODEL I	**$160.00**
MODEL II	**$170.00**
DOCUMENTATION ONLY	**$25.00**

RCR INC ✓197

RELIABLE COMPUTER RESOURCES
415 MILLBURY STREET
WORCESTER, MA 01607
(617) 755-8084

*TRS-80 and TRSDOS are trademarks of Tandy Corporation which has no relation to RCR, INC.



SEND $9.95 CHECK OR MONEY ORDER TO:
SEMISOFT 121 MADISON AVENUE NEW YORK, N.Y. 10016

THE BLINKING CURSOR

MACHINE LANGUAGE ROUTINE
FOR TRS-80 16K LEVEL II

LOADS IN SECONDS FROM CASSETTE INTO LESS THAN 1/2K BYTES OF PROTECTED MEMORY AND TIES INTO ROM KEY SCAN.


Customize Your Cursor:
SELECT ANY CHARACTER OR GRAPHICS BLOCK AND WATCH IT BLINK!
CHANGE AS OFTEN AS YOU LIKE.

FEATURES:
- FAST REPEATING ← KEY AND SPACE BAR
- INSTANT SWAP WITH RESIDENT CURSOR
- UNAFFECTED BY NEW OR RESET
- WORKS IN COMMAND - EDIT - EXECUTE MODES
- KEY DEBOUNCE

* T.M. TANDY CORP.

A System Cassette from Semisoft ✓290

'KGS-80'



KOGYOSHA

A TRS-80 WORD PROCESSING SYSTEM FOR LESS THAN $600

(If you own IBM Selectric or equivalent.)

Turn your typewriter and TRS-80 into a new word processing system with a new device, the **"KGS-80"**.

- Plug in compatible with TRS-80.
- No mechanical modification to the typewriter.
- Can be installed in 5 seconds.
- Software, a versatile Simple Letterwriter, included.

179 Riveredge Rd. Tenafly NJ 07670 (201) 569-8769 ✓149

DEALER INQUIRIES INVITED

OBJECT CODE	MNEMONICS	PAGE #
91	SUB C	47
92	SUB D	47
93	SUB E	47
94	SUB H	47
95	SUB L	47
D620	SUB N	47
AE	XOR (HL)	51
DDAE05	XOR (IX+IND)	51
FDAE05	XOR (IY+IND)	51
AF	XOR A	51
A8	XOR B	51
A9	XOR C	51
AA	XOR D	51
AB	XOR E	51
AC	XOR H	51
AD	XOR L	51
EE20	XOR N	51
00	NOP	59
018405	LD BC,NN	24
02	LD (BC),A	20
03	INC BC	65
04	INC B	53
05	DEC B	55
0620	LD B,N	13
07	RLCA	69
08	EX AF,AF'	34
09	ADD HL,BC	63
0A	LD A,(BC)	18
0B	DEC BC	67
0C	INC C	53
0D	DEC C	55
0E20	LD C,N	13
0F	RRCA	70
102E	DJNZDIS	91
118405	LD DE,NN	24
12	LD (DE),A	20
13	INC DE	65
14	INC D	53
15	DEC D	55
1620	LD D,N	13
17	RLA	69
182E	JR DIS	87
19	ADD HL,DE	63
1A	LD A,(DE)	19
1B	DEC DE	67
1C	INC E	53
1D	DEC E	55
1E20	LD E,N	13
1F	RRA	70
202E	JR NZ,DIS	89
218405	LD HL,NN	24
228405	LD (NN),HL	27,28
23	INC HL	65
24	INC H	53
25	DEC H	55
2620	LD H,N	13
27	DAA	56
282E	JR Z,DIS	88
29	ADD HL,HL	63
2A8405	LD HL,(NN)	25,26
2B	DEC HL	67
2C	INC L	53
2D	DEC L	55
2E20	LD L,N	13
2F	CPL	57
302E	JR NC,DIS	88
318405	LD SP,NN	24
328405	LD (NN),A	21
33	INC SP	65
34	INC (HL)	53
35	DEC (HL)	55
3620	LD (HL),N	17
37	SCF	58
382E	JR C,DIS	87
39	ADD HL,SP	63
3A8405	LD A,(NN)	19
3B	DEC SP	67
3C	INC A	53
3D	DEC A	55
3E20	LD A,N	13
3F	CCF	58
40	LD B,B	13
41	LD B,C	13
42	LD B,D	13
43	LD B,E	13
44	LD B,H	13
45	LD B,L	13
46	LD B,(HL)	14
47	LD B,A	13
48	LD C,B	13
49	LD C,C	13
4A	LD C,D	13
4B	LD C,E	13
4C	LD C,H	13
4D	LD C,L	13
4E	LD C,(HL)	14
4F	LD C,A	13
50	LD D,B	13
51	LD D,C	13
52	LD D,D	13
53	LD D,E	13
54	LD D,H	13
55	LD D,L	13
56	LD D,(HL)	14
57	LD D,A	13
58	LD E,B	13
59	LD E,C	13
5A	LD E,D	13
5B	LD E,E	13
5C	LD E,H	13
5D	LD E,L	13
5E	LD E,(HL)	14
5F	LD E,A	13
60	LD H,B	13
61	LD H,C	13
62	LD H,D	13
63	LD H,E	13
64	LD H,H	13
65	LD H,L	13
66	LD H,(HL)	14
67	LD H,A	13
68	LD L,B	13
69	LD L,C	13

OBJECT CODE	MNEMONICS	PAGE #
6A	LD L,D	13
6B	LD L,E	13
6C	LD L,H	13
6D	LD L,L	13
6E	LD L,(HL)	14
6F	LD L,A	13
70	LD (HL),B	15
71	LD (HL),C	15
72	LD (HL),D	15
73	LD (HL),E	15
74	LD (HL),H	15
75	LD (HL),L	15
76	HALT	59
77	LD (HL),A	15
78	LD A,B	13
79	LD A,C	13
7A	LD A,D	13
7B	LD A,E	13
7C	LD A,H	13
7D	LD A,L	13
7E	LD A,HL	14
7F	LD A,A	13
80	ADD A,B	43
81	ADD A,C	43
82	ADD A,D	43
83	ADD A,E	43
84	ADD A,H	43
85	ADD A,L	43
86	ADD A,(HL)	44
87	ADD A,A	43
88	ADC A,B	46
89	ADC A,C	46
8A	ADC A,D	46
8B	ADC A,E	46
8C	ADC A,H	46
8D	ADC A,L	46
8E	ADC A,(HL)	46
8F	ADC A,A	46
90	SUB B	47
91	SUB C	47
92	SUB D	47
93	SUB E	47
94	SUB H	47
95	SUB L	47
96	SUB (HL)	47
97	SUB A	47
98	SBC A,B	48
99	SBC A,C	48
9A	SBC A,D	48
9B	SBC A,E	48
9C	SBC A,H	48
9D	SBC A,L	48
9E	SBC A,(HL)	48
9F	SBC A,A	48
A0	AND B	49
A1	AND C	49
A2	AND D	49
A3	AND E	49
A4	AND H	49
A5	AND L	49
A6	AND (HL)	49
A7	AND A	49
A8	XOR B	51
A9	XOR C	51
AA	XOR D	51
AB	XOR E	51
AC	XOR H	51
AD	XOR L	51
AE	XOR (HL)	51
AF	XOR A	51
B0	OR B	50
B1	OR C	50
B2	OR D	50
B3	OR E	50
B4	OR H	50
B5	OR L	50
B6	OR (HL)	50
B7	OR A	50
B8	CP B	52
B9	CP C	52
BA	CP D	52
BB	CP E	52
BC	CP H	52
BD	CP L	52
BE	CP (HL)	52
BF	CP A	52
C0	RET NZ	95
C1	POP BC	32
C28405	JP NZ,NN	86
C38405	JP NN	86
C48405	CALL NZ,NN	93
C5	PUSH BC	31
C620	ADD A,N	43
C7	RST 0	97
C8	RET Z	95
C9	RET	94
CA8405	JP Z,NN	86
CB00	RLC B	71
CB01	RLC C	71
CB02	RLC D	71
CB03	RLC E	71
CB04	RLC H	71
CB05	RLC L	71
CB06	RLC (HL)	71
CB07	RLC A	71
CB08	RRC B	74
CB09	RRC C	74
CB0A	RRC D	74
CB0B	RRC E	74
CB0C	RRC H	74
CB0D	RRC L	74
CB0E	RRC (HL)	74
CB0F	RRC A	74
CB10	RL B	73
CB11	RL C	73
CB12	RL D	73
CB13	RL E	73
CB14	RL H	73
CB15	RL L	73
CB16	RL (HL)	73
CB17	RL A	73

OBJECT CODE	MNEMONICS	PAGE #
CB18	RR B	75
CB19	RR C	75
CB1A	RR D	75
CB1B	RR E	75
CB1C	RR H	75
CB1D	RR L	75
CB1E	RR (HL)	75
CB1F	RR A	75
CB20	SLA B	76
CB21	SLA C	76
CB22	SLA D	76
CB23	SLA E	76
CB24	SLA H	76
CB25	SLA L	76
CB26	SLA (HL)	76
CB27	SLA A	76
CB28	SRA B	77
CB29	SRA C	77
CB2A	SRA D	77
CB2B	SRA E	77
CB2C	SRA H	77
CB2D	SRA L	77
CB2E	SRA (HL)	77
CB2F	SRA A	77
CB38	SRL B	78
CB39	SRL C	78
CB3A	SRL D	78
CB3B	SRL E	78
CB3C	SRL H	78
CB3D	SRL L	78
CB3E	SRL (HL)	78
CB3F	SRL A	78
CB40	BIT 0,B	81
CB41	BIT 0,C	81
CB42	BIT 0,D	81
CB43	BIT 0,E	81
CB44	BIT 0,H	81
CB45	BIT 0,L	81
CB46	BIT 0,(HL)	81
CB47	BIT 0,A	81
CB48	BIT 1,B	81
CB49	BIT 1,C	81
CB4A	BIT 1,D	81
CB4B	BIT 1,E	81
CB4C	BIT 1,H	81
CB4D	BIT 1,L	81
CB4E	BIT 1,(HL)	81
CB4F	BIT 1,A	81
CB50	BIT 2,B	81
CB51	BIT 2,C	81
CB52	BIT 2,D	81
CB53	BIT 2,E	81
CB54	BIT 2,H	81
CB55	BIT 2,L	81
CB56	BIT 2,(HL)	81
CB57	BIT 2,A	81
CB58	BIT 3,B	81
CB59	BIT 3,C	81
CB5A	BIT 3,D	81
CB5B	BIT 3,E	81
CB5C	BIT 3,H	81
CB5D	BIT 3,L	81
CB5E	BIT 3,(HL)	81
CB5F	BIT 3,A	81
CB60	BIT 4,B	81
CB61	BIT 4,C	81
CB62	BIT 4,D	81
CB63	BIT 4,E	81
CB64	BIT 4,H	81
CB65	BIT 4,L	81
CB66	BIT 4,(HL)	81
CB67	BIT 4,A	81
CB68	BIT 5,B	81
CB69	BIT 5,C	81
CB6A	BIT 5,D	81
CB6B	BIT 5,E	81
CB6C	BIT 5,H	81
CB6D	BIT 5,L	81
CB6E	BIT 5,(HL)	81
CB6F	BIT 5,A	81
CB78	BIT 6,B	81
CB71	BIT 6,C	81
CB72	BIT 6,D	81
CB73	BIT 6,E	81
CB74	BIT 6,H	81
CB75	BIT 6,L	81
CB76	BIT 6,(HL)	81
CB77	BIT 6,A	81
CB78	BIT 7,B	81
CB79	BIT 7,C	81
CB7A	BIT 7,D	81
CB7B	BIT 7,E	81
CB7C	BIT 7,H	81
CB7D	BIT 7,L	81
CB7E	BIT 7,(HL)	81
CB7F	BIT 7,A	81
CB80	RES 0,B	85
CB81	RES 0,C	85
CB82	RES 0,D	85
CB83	RES 0,E	85
CB84	RES 0,H	85
CB85	RES 0,L	85
CB86	RES 0,(HL)	85
CB87	RES 0,A	85
CB88	RES 1,B	85
CB89	RES 1,C	85
CB8A	RES 1,D	85
CB8B	RES 1,E	85
CB8C	RES 1,H	85
CB8D	RES 1,L	85
CB8E	RES 1,(HL)	85
CB8F	RES 1,A	85
CB90	RES 2,B	85
CB91	RES 2,C	85
CB92	RES 2,D	85
CB93	RES 2,E	85
CB94	RES 2,H	85
CB95	RES 2,L	85
CB96	RES 2,(HL)	85
CB97	RES 2,A	85
CB98	RES 3,B	85
CB99	RES 3,C	85

OBJECT CODE	MNEMONICS	PAGE #
CB9A	RES 3,D	85
CB9B	RES 3,E	85
CB9C	RES 3,H	85
CB9D	RES 3,L	85
CB9E	RES 3,(HL)	85
CB9F	RES 3,A	85
CBA0	RES 4,B	85
CBA1	RES 4,C	85
CBA2	RES 4,D	85
CBA3	RES 4,E	85
CBA4	RES 4,H	85
CBA5	RES 4,L	85
CBA6	RES 4,(HL)	85
CBA7	RES 4,A	85
CBA8	RES 5,B	85
CBA9	RES 5,C	85
CBAA	RES 5,D	85
CBAB	RES 5,E	85
CBAC	RES 5,H	85
CBAD	RES 5,L	85
CBAE	RES 5,(HL)	85
CBAF	RES 5,A	85
CBB0	RES 6,B	85
CBB1	RES 6,C	85
CBB2	RES 6,D	85
CBB3	RES 6,E	85
CBB4	RES 6,H	85
CBB5	RES 6,L	85
CBB6	RES 6,(HL)	85
CBB7	RES 6,A	85
CBB8	RES 7,B	85
CBB9	RES 7,C	85
CBBA	RES 7,D	85
CBBB	RES 7,E	85
CBBC	RES 7,H	85
CBBD	RES 7,L	85
CBBE	RES 7,(HL)	85
CBBF	RES 7,A	85
CBC0	SET 0,B	83
CBC1	SET 0,C	83
CBC2	SET 0,D	83
CBC3	SET 0,E	83
CBC4	SET 0,H	83
CBC5	SET 0,L	83
CBC6	SET 0,(HL)	83
CBC7	SET 0,A	83
CBC8	SET 1,B	83
CBC9	SET 1,C	83
CBCA	SET 1,D	83
CBCB	SET 1,E	83
CBCC	SET 1,H	83
CBCD	SET 1,L	83
CBCE	SET 1,(HL)	83
CBCF	SET 1,A	83
CBD0	SET 2,B	83
CBD1	SET 2,C	83
CBD2	SET 2,D	83
CBD3	SET 2,E	83
CBD4	SET 2,H	83
CBD5	SET 2,L	83
CBD6	SET 2,(HL)	83
CBD7	SET 2,A	83
CBD8	SET 3,B	83
CBD9	SET 3,C	83
CBDA	SET 3,D	83
CBDB	SET 3,E	83
CBDC	SET 3,H	83
CBDD	SET 3,L	83
CBDE	SET 3,(HL)	83
CBDF	SET 3,A	83
CBE0	SET 4,B	83
CBE1	SET 4,C	83
CBE2	SET 4,D	83
CBE3	SET 4,E	83
CBE4	SET 4,H	83
CBE5	SET 4,L	83
CBE6	SET 4,(HL)	83
CBE7	SET 4,A	83
CBE8	SET 5,B	83
CBE9	SET 5,C	83
CBEA	SET 5,D	83
CBEB	SET 5,E	83
CBEC	SET 5,H	83
CBED	SET 5,L	83
CBEE	SET 5,(HL)	83
CBEF	SET 5,A	83
CBF0	SET 6,B	83
CBF1	SET 6,C	83
CBF2	SET 6,D	83
CBF3	SET 6,E	83
CBF4	SET 6,H	83
CBF5	SET 6,L	83
CBF6	SET 6,(HL)	83
CBF7	SET 6,A	83
CBF8	SET 7,B	83
CBF9	SET 7,C	83
CBFA	SET 7,D	83
CBFB	SET 7,E	83
CBFC	SET 7,H	83
CBFD	SET 7,L	83
CBFE	SET 7,(HL)	83
CBFF	SET 7,A	83
CC8405	CALLZ,NN	93
CD8405	CALLNN	92
CE20	ADC A,N	46
CF	RST 8	97
D0	RET NC	95
D1	POP DE	32
D28405	JP NC,NN	86
D320	OUT (N),A	103
D48405	CALLNC,NN	93
D5	PUSHDE	31
D620	SUB N	47
D7	RST 10H	97
D8	RET C	95
D9	EXX	35
DA8405	JP C,NN	86
DB20	IN A,(N)	98
DC8405	CALLC,NN	93
DD09	ADD IX,BC	64
DD19	ADD IX,DE	64
DD218405	LD IX,NN	24
DD228405	LD (NN),IX	28

OBJECT CODE	MNEMONICS	PAGE #
DD23	INC IX	66
DD29	ADD IX,IX	64
DD2A8405	LD IX,(NN)	26
DD2B	DEC IX	67
DD3405	INC (IX+IND)	54
DD3505	DEC (IX+IND)	55
DD360520	LD (IX+IND),N	17
DD39	ADD IX,SP	64
DD4605	LD B,(IX+IND)	14
DD4E05	LD C,(IX+IND)	14
DD5605	LD D,(IX+IND)	14
DD5E05	LD E,(IX+IND)	14
DD6605	LD H,(IX+IND)	14
DD6E05	LD L,(IX+IND)	14
DD7005	LD (IX+IND),B	16
DD7105	LD (IX+IND),C	16
DD7205	LD (IX+IND),D	16
DD7305	LD (IX+IND),E	16
DD7405	LD (IX+IND),H	16
DD7505	LD (IX+IND),L	16
DD7705	LD (IX+IND),A	16
DD7E05	LD A,(IX+IND)	14
DD8605	ADD A,(IX+IND)	44
DD8E05	ADC A,(IX+IND)	46
DD9605	SUB (IX+IND)	47
DD9E05	SBC A,(IX+IND)	48
DDA605	AND (IX+IND)	49
DDAE05	XOR (IX+IND)	51
DDB605	OR (IX+IND)	50
DDBE05	CP (IX+IND)	52
DDCB0506	RLC (IX+IND)	72
DDCB050E	RRC (IX+IND)	74
DDCB0516	RL (IX+IND)	73
DDCB051E	RR (IX+IND)	75
DDCB0526	SLA (IX+IND)	76
DDCB052E	SRA (IX+IND)	77
DDCB053E	SRL (IX+IND)	78
DDCB0546	BIT 0,(IX+IND)	82
DDCB054E	BIT 1,(IX+IND)	82
DDCB0556	BIT 2,(IX+IND)	82
DDCB055E	BIT 3,(IX+IND)	82
DDCB0566	BIT 4,(IX+IND)	82
DDCB056E	BIT 5,(IX+IND)	82
DDCB0576	BIT 6,(IX+IND)	82
DDCB057E	BIT 7,(IX+IND)	82
DDCB0586	RES 0,(IX+IND)	85
DDCB058E	RES 1,(IX+IND)	85
DDCB0596	RES 2,(IX+IND)	85
DDCB059E	RES 3,(IX+IND)	85
DDCB05A6	RES 4,(IX+IND)	85
DDCB05AE	RES 5,(IX+IND)	85
DDCB05B6	RES 6,(IX+IND)	85
DDCB05BE	RES 7,(IX+IND)	85
DDCB05C6	SET 0,(IX+IND)	84
DDCB05CE	SET 1,(IX+IND)	84
DDCB05D6	SET 2,(IX+IND)	84
DDCB05DE	SET 3,(IX+IND)	84
DDCB05E6	SET 4,(IX+IND)	84
DDCB05EE	SET 5,(IX+IND)	84
DDCB05F6	SET 6,(IX+IND)	84
DDCB05FE	SET 7,(IX+IND)	84
DDE1	POP IX	33
DDE3	EX (SP),IX	36
DDE5	PUSHIX	31
DDE9	JP (IX)	90
DDF9	LD SP,IX	30
DE20	SBC A,N	48
DF	RST 18H	97
E0	RET PO	95
E1	POP HL	32
E2 8405	JP PO,NN	86
E3	EX (SP),HL	35
E4 8405	CALL PO,NN	93
E5	PUSHHL	31
E620	AND N	49
E7	RST 20H	97
E8	RET PE	95
E9	JP (HL)	89
EA8405	JP PE,NN	86
EB	EX DE,HL	34
EC8405	CALL PE,NN	93
ED40	IN B,(C)	98
ED41	OUT (C),B	103
ED42	SBC HL,BC	64
ED438405	LD (NN),BC	28
ED44	NEG	57
ED4455	RETN	96
ED46	IM 0	61
ED47	LD I,A	22
ED48	IN C,(C)	98
ED49	OUT (C),C	103
ED4A	ADC HL,BC	63
ED4B8405	LD BC,(NN)	26
ED4D	RETI	96
ED4F	LD R,A	23
ED50	IN D,(C)	98
ED51	OUT (C),D	103
ED52	SBC HL,DE	64
ED538405	LD (NN),DE	28
ED56	IM 1	61
ED57	LD A,I	21
ED58	IN E,(C)	98
ED59	OUT (C),E	103
ED5A	ADC HL,DE	63
ED5B8405	LD DE,(NN)	26
ED5E	IM 2	62
ED5F	LD A,R	22
ED60	IN H,(C)	98
ED61	OUT (C),H	103
ED62	SBC HL,HL	64
ED67	RRD	80
ED68	IN L,(C)	98
ED69	OUT (C),L	103
ED6A	ADC HL,HL	63
ED6F	RLD	79
ED72	SBC HL,SP	64
ED738405	LD (NN),SP	28
ED78	IN A,(C)	98
ED79	OUT (C),A	103
ED7A	ADC HL,SP	63
ED7B8405	LD SP,(NN)	26
EDA0	LDI	37
EDA1	CPI	41
EDA2	INI	99
EDA3	OUTI	104
EDA8	LDD	39
EDA9	CPD	42
EDAA	IND	101
EDAB	OUTD	106
EDB0	LDIR	38
EDB1	CPIR	41
EDB2	INIR	100
EDB3	OTIR	105
EDB8	LDDR	40
EDB9	CPDR	42
EDBA	INDR	102
EDBB	OTDR	107
EE20	XOR N	51
EF	RST 28H	97
F0	RET P	95
F1	POP AF	32
F28405	JP P,NN	86
F3	DI	60
F48405	CALL P,NN	93
F5	PUSH AF	31
F620	OR N	50
F7	RST 30H	97
F8	RET M	95
F9	LD SP,HL	29
FA8405	JP M,NN	86
FB	EI	60
FC8405	CALL M,NN	93
FD09	ADD IY,BC	65
FD19	ADD IY,DE	65
FD218405	LD IY,NN	25
FD228405	LD (NN),IY	29
FD23	INC IY	66
FD29	ADD IY,IY	65
FD2A8405	LD IY,(NN)	27
FD2B	DEC IY	68
FD3405	INC (IY+IND)	54
FD3505	DEC (IY+IND)	55
FD360520	LD (IY+IND),N	18
FD39	ADD IY,SP	65
FD4605	LD B,(IY+IND)	15
FD4E05	LD C,(IY+IND)	15
FD5605	LD D,(IY+IND)	15
FD5E05	LD E,(IY+IND)	15
FD6605	LD H,(IY+IND)	15
FD6E05	LD L,(IY+IND)	15
FD7005	LD (IY+IND),B	16
FD7105	LD (IY+IND),C	16
FD7205	LD (IY+IND),D	16
FD7305	LD (IY+IND),E	16
FD7405	LD (IY+IND),H	16
FD7505	LD (IY+IND),L	16
FD7705	LD (IY+IND),A	16
FD7E05	LD A,(IY+IND)	15
FD8605	ADD A,(IY+IND)	45
FD8E05	ADC A,(IY+IND)	46
FD9605	SUB (IY+IND)	47
FD9E05	SBC A,(IY+IND)	48
FDA605	AND (IY+IND)	49
FDAE05	XOR (IY+IND)	51
FDB605	OR (IY+IND)	50
FDBE05	CP (IY+IND)	52
FDCB0506	RLC (IY+IND)	72
FDCB050E	RRC (IY+IND)	74
FDCB0516	RL (IY+IND)	73
FDCB051E	RR (IY+IND)	75
FDCB0526	SLA (IY+IND)	76
FDCB052E	SRA (IY+IND)	77
FDCB053E	SRL (IY+IND)	78
FDCB0546	CP 0,(IY+IND)	82
FDCB054E	BIT 1,(IY+IND)	82
FDCB0556	BIT 2,(IY+IND)	82
FDCB055E	BIT 3,(IY+IND)	82
FDCB0566	BIT 4,(IY+IND)	82
FDCB056E	BIT 5,(IY+IND)	82
FDCB0576	BIT 6,(IY+IND)	82
FDCB057E	BIT 7,(IY+IND)	82
FDCB0586	RES 0,(IY+IND)	85
FDCB058E	RES 1,(IY+IND)	85
FDCB0596	RES 2,(IY+IND)	85
FDCB059E	RES 3,(IY+IND)	85
FDCB05A6	RES 4,(IY+IND)	85
FDCB05AE	RES 5,(IY+IND)	85
FDCB05B6	RES 6,(IY+IND)	85
FDCB05BE	RES 7,(IY+IND)	85
FDCB05C6	SET 0,(IY+IND)	84
FDCB05CE	SET 1,(IY+IND)	84
FDCB05D6	SET 2,(IY+IND)	84
FDCB05DE	SET 3,(IY+IND)	84
FDCB05E6	SET 4,(IY+IND)	84
FDCB05EE	SET 5,(IY+IND)	84
FDCB05F6	SET 6,(IY+IND)	84
FDCB05FE	SET 7,(IY+IND)	84
FDE1	POP IY	33
FDE3	EX (SP),IY	36
FDE5	PUSH IY	32
FDE9	JP (IY)	90
FDF9	LD SP,IY	30
FE20	CP N	52
FF	RST 38H	97

TRS-80 Software Exchange

- *Cash & royalties for original programs—science, business, games, education.*
- *No risk.*
- *Join our co-op & share your programs with others and vice-versa!*

Programs must be original!

For complete info, clip & mail to:

Software Exchange
P.O. Box 42407 ✓284
Portland, Oregon 97242

Name _____
Add. _____
City _____
State _____
Zip _____

QUALITY TRS-80 SOFTWARE

KEYWORD Indexing System

A series of programs that will create a data file on disc, build an index of all occurrences of "Keywords" in the text of the data file and allow inquiries or searches into the file using the indexed keywords. The system features:
- **flexible record lengths with location pointers**
- **deletion of non keywords from index by system**
- **"and" "or" "not" logic for inquiries**
- **interface for user written inquiries**

KEYWORD INDEX—2 disc 32K DOS system $39.95

SORTS for HOME and BUSINESS

No computer user should be without a versatile, easy to use sort program. The Northeast Microware in memory sort programs are written in Level II BASIC and have the following features:
- **Sort ALPHA or NUMERIC data**
- **Sort on up to 5 fields simultaneously**
- **In ascending or descending sequence**
- **Supports kb, video or tape I/O**
- **Supports seq. disk and printer I/O (SORT-IID)**
- **Supports user I/O routines**
- **User exits (SORT-IID only)**

SORT-II—16K Level II in memory sort $19.95
SORT-IID—32K DOS in memory sort $29.95

FOR the SERIOUS GAMBLER

BLACKJACK SIMULATOR. Allows you to simulate the playing of thousands of hands of BJ and analyze the results on tape in Level II BASIC. $19.95

Manuals for all programs available for $3.00 ea. (price deductible on purchase of program)

"TRS-80 is a registered trademark of TANDY CORP."

Northeast MICROWARE
BOX 2133, ✓74
BOSTON, MA. 02106

TRS-80 MODEL II

Professional Software NOW AVAILABLE!

WORD PROCESSING: Complete editing capability including center, right, left or full line justification, tabs, margin, length & width control. Lines automatically overflow from line to line. All file specifications stored on disk. Passwords used. All printer features used (per your printer). Auto insertion of names/date etc. from other data file(s). Disk index maintained for file control. You can display index: date/time created, changed or used & brief description. System LOG used. Files can be on other disk drives. Extract & build. A chain of different files can be printed along with multi-copy control & auto insertion. Interfacing with other systems for auto-data easily done.

Requires 64K & printer of your choice
Documentation * $10.00 Total = $299.00

BASIC CROSS REFERENCE: Prepares a listing of your BASIC program. Heading contains program name, date, time, & page #. All 'REM' statements print ELONGATED & are easy to spot. The cross-reference report is then printed. It shows you at a GLANCE what line #'s within your program are referenced & where, all variable names used & where. Know what is available. Find DEAD spots. We wrote this for ourselves . . . you can use it too . . . . !

Documentation * $10.00 Total = $59.99

DISK SORT: Sorts thousands of 'random file' records. Capacity is dependent on your disk space. Efficient use of strings. Sorts any data area from 1 thru 255 contiguous bytes within any part of your record. Specifications are input using the question & answer method. They can be stored & used automatically in your system job stream or you can one-shot sort. Input files are not clobbered by the sort. All stored specs can be displayed, printed or changed.

Single or multiple drives & 64K required
Documentation * $10.00 Total = $69.99

COMING SOON: General Ledger, Accounts Receivable/Payable, Inventory Control & more.

CUSTOM SYSTEMS: If you have a special need, send us a letter. We can do it.

ANADEX PRINTERS. .DP-9500/9501 $1,650.00 NEW!
Send for documentation & order form.

GOOD-LYDDON Data Systems
5486 Riverside Dr., Chino, CA. 91710 ✓218

*Deductible on software purchases.
TRS-80 is a registered trademark of Tandy Corp.

Use this program to replace your columnar work sheets when doing the books.

Accountants Aid

James H. Sheats
2036 Headland Drive
East Point, GA 30344

From time to time accountants, bookkeepers, analysts and the rest of the number-scribbling fraternity (by whatever name called) pick up a sheet of columnar work paper, print a report title and date at the top, print columnar headings across the page, and start filling in lines and columns of figures.

```
10 REM "SPREAD SHEET"
20 REM PROGRAMMED BY JAMES H. SHEATS
30 REM                2036 HEADLAND DRIVE
40 REM                EAST POINT, GEORGIA 30344
50 REM                404-766-0857
52 CLEAR2000
53 DEFDBL C,T
55 CLS:LPRINT CHR$(31):LPRINT:LPRINT
60 PRINT"SPREAD SHEET PROGRAM"
65 INPUT"REPORT NAME";R$:LPRINT TAB(30)R$:LPRINT:LPRINT
68 INPUT"DATE";D$:LPRINT TAB(35)D$:LPRINT:LPRINT
70 INPUT"INPUT LINE NAME";L$
75 INPUT" NUMBER OF COLUMNS WANTED ";N
76 DIM C$(N),C(N),CT(N)
77 LPRINT USING"%           %"; L$;
80 FOR X=1 TO N
90 INPUT"COLUMN NAME";C$(X)
100 LPRINT USING"%        %";C$(X);
120 NEXT
125 LPRINT"TOTAL"
130 PRINTL$:INPUT L
140 IF L=999 THEN 200
144 LPRINT USING"##########";L;
145 T=0
150 FOR X=1 TO N
155 C(X)=0
160 PRINT C$(X),:INPUT C(X):T=T+C(X)
165 LPRINT USING"#######.##";C(X);
170 CT(X)=CT(X)+C(X)
180 NEXT X
185 PRINT "TOTAL";T:LPRINT USING"#######.##";T
190 GOTO 130
200 CLS:LPRINT: PRINT "TOTALS":LPRINT"TOTALS     ";:FOR X=1 TO N
204 PRINT C$(X),CT(X),
205 TT=TT+CT(X)
208 LPRINT USING"#######.##";CT(X);
210 NEXT X
220 PRINT "GRAND TOTAL ";TT
230 LPRINT USING"#######.##";TT
240 END
```

Program Listing

Usually these sheets have both line and column totals, which should be equal when cross-footed. After considerable work with an adding machine and an eraser they usually are. Finally.

The Accountant's Writeup Aid is designed to eliminate some of the pain associated with this process. The program can be adapted to a number of purposes in its present state and can be customized to your own needs.

This program is written for a TRS-80, Level II, with a 132 column line printer (in the author's case, an IDS Paper Tiger). 4K of memory is plenty, since the program is very short, about 874 bytes.

The Program

The program uses both screen and printer output, but users without printers can eliminate all LPRINT statements and still have a useful program.

The command on Line 55, LPRINT CHR$ (31), is a Paper Tiger control command that adjusts the line length to 132 characters. It may not be necessary with other printers. Lines 65 and 68 allow you to input a Report Name and Date. Both of these lines are unnecessary without a printer.

Line 70 is the reference name. This can be Date, Check Number, Invoice Number or other suitable reference. This entry is not used for any computations.

In Line 75, input the number of columns that you want for a particular task. This version of the program is written with 10 characters per column and will print the reference column, 11 data columns and a line total column. (See Fig. 1.) You may customize your LPRINT USING statements for more or fewer columns.

Lines 80-125 form a routine to input heading names for the columns.

In Lines 130-190, numerical data is input. Each entry may be positive, negative or zero. After accepting an entry for each column, the program prints a line

total, and the routine is repeated for the next line. If an input error is made, the same reference number can be re-entered, zero quantities entered for the unchanged columns, and corrections made in the erroneous columns. This procedure is demonstrated in Fig. 1 for day 4.

This program loop is exited by inputting a reference number of 999, but you may establish your own loop exit. Upon exit from the loop, the program prints column totals and a grand total. At that point, the program terminates. This routine is in Lines 200-240.

One Disadvantage

One disadvantage to this program is that an entry must be made in each column, each time. However, a zero or an ENTER will do. No heading routines for second and subsequent pages are provided, either.

Still, for the computer owner/businessman, this simple program has a great deal of flexibility and should be in his library along with the amortization, checkbook balancing, depreciation and all the rest of the so-called "business" programs. ■

TRAVEL EXPENSE SUMMARY

NOVEMBER 1979

DATE	BREAKFAST	LUNCH	DINNER	TIPS	LAUNDRY	POSTAGE	PHONE	SUPPLIES	TAXI	PLANE	ROOM	TOTAL
1	2.15	3.50	3.25	2.00	0.00	0.75	1.20	3.25	2.50	350.00	45.00	413.60
2	2.15	2.75	2.75	1.50	3.50	0.60	0.60	12.18	2.55	0.00	45.00	73.58
3	2.50	2.90	18.95	5.00	0.00	0.60	1.20	3.50	6.75	0.00	45.00	86.40
4	200.00	2.25	3.25	1.50	6.75	0.60	1.20	3.50	2.75	350.00	0.00	571.80
4	-200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-200.00
4	7.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.00
5	0.00	0.00	6.15	1.25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	7.40
TOTALS	8.80	11.40	34.35	11.25	10.25	2.55	4.20	22.43	14.55	700.00	135.00	954.78

Fig. 1.

iMi

INTERACTIVE MICROWARE, INC.
P.O. BOX 771
STATE COLLEGE, PA. 16801

✓202

iMi

MEANS IMAGINATION

TRS-80 LEVEL II/16K $25.00

BASEX COMPILER AND LOADER

BY PAUL K. WARME

A powerful, easy-to-learn language that runs up to 20 times faster than BASIC. This 8K interactive compiler works much like BASIC and makes very compact programs. Features include arrays, strings, 16 bit math, block move and search, subroutines, fast graphics and tape I/O, 97-page manual, $8 extra.

MIRRORAYS 16K/LII $7.95
Flash rays of light into a black box in order to locate hidden mirrors, which light up and reflect the rays when hit.

LUNAR LANDER SIMULATOR 16K/LII $7.95
This program provides REAL-TIME simulation and control of the Lunar Module through continuous keyboard interaction.

COMPACT GRAPHICS INTERPRETER 4K/LII $7.95
Elaborate graphic designs can be created and constructed by this interpreter with a simple set of numbers.

BATTLEGRID 4K/LII $7.95
A REAL-TIME game of speed and strategy, enabling two players to attack each other's forces.

Add $.75 postage per order. FREE brochure with full description of each program.

FILE MANAGEMENT SYSTEM

Business/Personal Use

●**CREATES**—describe the length and name of each field in a disk file and the FMS system allows you to create and update the file without any programming.
●**UPDATES**—descriptive prompting and length checking for each field are automatically performed by the system when adding or updating records.
●**REPORTS**—FMS allows variable report format and headings as specified by you; reports go to display and/or line printer.
●**SORTS**—files can be sorted on any field in ascending or descending sequence.

INCLUDES: programs on diskette, sample files and extensive step-by-step documentation.
REQUIRES: TRS-80, disk, 32K.

✓289

order FMS from

"the Business Software Co."

609 Sapphire St.
Redondo Beach, CA 90277

SPECIAL OFFER $19.95

please add $1.00 for postage & handling. Calif. residents add 6% sales tax. Add 3% for VISA or Master Charge.

Let Your TRS-80® Teach You ASSEMBLY LANGUAGE

Tired of buying book after book on assembly language programming and still not knowing your **POP** from your **PUSH**?

REMSOFT proudly announces a more efficient way, using your own TRS-80®, to learn the fundamentals of assembly language programming --at YOUR pace and at YOUR convenience.

Our unique package, "**INTRODUCTION TO TRS-80® ASSEMBLY PROGRAMMING**", will provide you with the following:

- Ten 45-minute lessons on audio cassettes.
- A driver program to make your TRS-80® video monitor serve as a blackboard for the instructor.
- A display program for each lesson to provide illustration and reinforcement for what you are hearing.
- A textbook on TRS-80® Assembly Language Programming.
- Step-by-step dissection of complete and useful routines to test memory and to gain direct control over the keyboard, video monitor, and printer.
- How to access and use powerful routines in your Level II ROM.

This course was developed and recorded by Joseph E. Willis and is based on the successful series of courses he has taught at Meta Technologies Corporation, the Radio Shack Computer Center, and other locations in Northern Ohio. The minimum system required is a Level II, 16K RAM.

REMASSEM-1 only $69.95

REMSOFT, Inc.
571 E. 185 st.
Euclid, Ohio 44119
(216)531-1338

Include $1.50 for shipping and handling.
Ohio residents add 5½% sales tax.

✓70

TRS-80® is a trademark of the Tandy Corp.

!!NOW AVAILABLE!!

INDEX SEQUENTIAL ACCESS METHOD

★ Get and Put Records to Disk File by "KEY"
★ Read File in Key Sequence Without Sorting
★ Delete Records Without Recopying File
★ Add Records to Disk Files in Any Sequence
★ Variable Key Length From 1 to 50 Characters

BUSINESS APPLICATION ADVANTAGES

- Improved Disk Utilization
- Easier Program Development
- Improved Operating Characteristics
- Reduce or Eliminate Sorting
- Improved Performance

ISAM SUBROUTINES **Documentation**
ISAM UTILITIES On Diskette $50.00

PLUS - Free Mailing List Sample Application
Add 6% Sales Tax for California Orders

✓85

TRS-80® **MODEL I & II** SOFTWARE FROM:

Johnson Associates -or- 24 Hour Order Line
P.O. Box 1402M For Bank Cards Sales
Redding, CA 96099 (916) 221-0740

-WRITE FOR FREE CATALOG-

TRS-80® Registered Trademark of the TANDY CORP

Display your buffer contents in hex, ASCII or decimal.

Buffer Analysis

Robert M. Chambers
74 Stinson Ave.
Nepean, Ontario
Canada K2H 6N4

In my efforts to discover the various TRS-80 tape formats, I found that I had to write several assembler and BASIC programs to do little bits and pieces of the work.

To overcome the awkwardness of frequently loading the different programs, I decided to write one program which would do all the jobs.

Buffer Analyser is a program which displays the TRS-80's I/O buffer in ASCII, decimal or hexadecimal format.

The whole idea of this program is to read a record into the I/O buffer and display it on the screen in hex, decimal or ASCII. Using the I/O buffer overcomes the problem of truncated data which often occurs when a string variable is used.

According to the memory map provided in the Level II BASIC Reference Manual, the address of the I/O buffer begins at 16870 and ends at 17127. Using the PEEK instruction within FOR-NEXT loops and referencing this area, one byte at a time is accessed and processed for the chosen display format.

When the command menu is displayed, you press A for ASCII, H for hexadecimal, D for decimal, N to read the next tape record, C to clear the buffer and X to stop the run.

Hexadecimal display is most useful for my purposes and I have, therefore, supplied the list of compression codes in that (Table 1) form. This list is useful in analyzing BASIC program tapes and useful information to use for writing programs to renumber or change BASIC programs. These codes are used in memory and on tapes to reduce the amount of storage needed for BASIC programs.

The Level II manual also mentions that each line of BASIC code contains a carriage return, a two-byte line pointer and a two-byte line number. The TRS-80 Microcomputer Technical Reference Handbook says that a CSAVE will generate 128 zero bits, an A5 hex byte for synchronizing a read, a two-byte start address, a two-byte end address, the data and, finally, a one-byte check sum. The check sum is the sum of all the data.

When you examine the buffer you will not see a lot of this. A BASIC program in hex will start 00 2C D3 D3 D3. Presumably, this portion follows the sync byte A5, which is not shown. Using the code compression table below, you can find the start of the program statements and proceed to decipher the program. ■

ABS	D9	GET	A4	PUT	A5
AND	D2	GOSUB	91	RANDOM	86
ASC	F6	GOTO	8D	READ	8B
ATN	E4	IF	8F	REM	93
AUTO	B7	INKEY$	C9	RESET	82
CDBL	F1	INP	DB	RESUME	9F
CHR$	F7	INPUT	89	RESTORE	90
CINT	EF	INSTR	C5	RETURN	92
CLEAR	B8	INT	D8	RIGHT$	F9
CLOAD	B9	KILL	AA	RND	DE
CLOSE	A6	LEFT$	F8	RSET	AC
CLS	84	LEN	F3	RUN	8E
CMD	85	LET	8C	SAVE	AD
CONT	B3	LINE	9C	SET	83
COS	E1	LIST	B4	SGN	D7
CSAVE	BA	LLIST	B5	SIN	E2
CSNG	F0	LOAD	A7	SQR	DD
CVD	E8	LOC	EA	STEP	CC
CVI	E6	LOF	EB	STOP	94
CVS	E7	LOG	DF	STR$	F4
DATA	88	LPRINT	AF	STRING$	C4
DEF	B0	LSET	AB	TAB(	BC
DEFDBL	9B	MEM	C8	TAN	E3
DEFINT	99	MERGE	A8	THEN	CA
DEFSNG	9A	MID$	FA	TIME$	C7
DEFSTR	98	MKD$	EE	TO	BD
DELETE	B6	MKI$	EC	TROFF	97
DIM	8A	MKS$	ED	TRON	96
EDIT	9D	NAME	A9	USING	BF
ELSE	95	NEW	BB	USR	C1
END	80	NEXT	87	VAL	F5
EOF	E9	NOT	CB	VARPTR	C0
ERL	C2	ON	A1	+	CD
ERR	C3	OPEN	A2	−	CE
ERROR	9E	OR	D3	*	CF
EXP	E0	OUT	A0	/	DO
FIELD	A3	PEEK	E5	↑	D1
FIX	F2	POINT	C6	>	D4
FN	BE	POKE	B1	=	D5
FOR	81	POS	DC	<	D6
FRE	DA	PRINT	B2		

Table 1. Level II BASIC Compression Codes.

Program Listing.

```
1 CLEAR1000
5 A$="0123456789ABCDEF"
10 CLS:PRINTCHR$(23):PRINT@528,"BUFFER ANALYZER";:FORZ=
    1TO1200:NEXTZ
15 GOTO30       REM >>>>>>> TO MAIN LINE START <<<<<<<<
20 CLS:AF$=CHR$(0):PRINT@530,"PRESS A KEY TO READ THE N
    EXT RECORD";
25 AF$=INKEY$:IFAF$<CHR$(1)THEN25ELSECLS:PRINT@534,"TAP
    E RECORD BEING READ";:INPUT#-1,B$
30 AF$=CHR$(0):CLS:PRINT@412,"PRESS";:PRINT@515,"A FOR
    ASCII, H FOR HEX, D FOR DECIMAL N FOR NEXT OR X TO
     END";:PRINT@658,"PRESS C TO CLEAR THE BUFFER";
35 AF$=INKEY$:IFAF$<CHR$(1)THEN35
40 IFAF$="A"THENGOSUB176:GOTO500
45 IFAF$="H"THENGOSUB95: GOTO500
50 IFAF$="D"THENGOSUB200:GOTO500
55 IFAF$="N"THEN          GOTO20
60 IFAF$="X"THENCLS:     GOTO999
65 IFAF$="C"THENGOSUB700:GOTO30
90 GOTO30
94 '*************************************************
    *****
95 '***** THE CONVERT BUFFER AND DISPAY IN HEX ROUTINE
    *****
96 '*************************************************
    *****
100 CLS
150 FORX=16870TO17127:A=PEEK(X)
```

```
155 B=FIX(A/16):C=B*16:D=A-C
160 PRINTMID$(A$,B+1,1);MID$(A$,D+1,1);" ";
165 NEXTX
170 RETURN
175 '************************************************
     *****
176 '***** THE READ BUFFER AND DISPLAY IN ASCII ROUTINE
     ****
177 '************************************************
     *****
180 CLS
185 FORX=16870TO17127:PRINTCHR$(PEEK(X));" ";:NEXTX
190 RETURN
199 '************************************************
     *****
200 '**** THE READ BUFFER AND DISPLAY IN DECIMAL ROUTIN
    E ***
201 '************************************************
     *****
205 CLS
210 FORX=16870TO17127:PRINTPEEK(X);:NEXTX
234 RETURN
235 '************************************************
     *****
500 '******** THE DELAY AT END OF DISPLAY ROUTINE *****
     *****
501 '************************************************
     *****
505 AF$=CHR$(0)
510 AF$=INKEY$:IFAF$<CHR$(1)THEN510
515 GOTO30:       REM BACK TO MAIN LINE
599 '************************************************
     *****
700 '*************** CLEAR BUFFER ROUTINE **************
     *****
701 '************************************************
     *****
702 CLS:PRINT@540,"CLEARING";
705 FORX=16870TO17127:POKEX,0:NEXTX
706 CLS:PRINT@540,"CLEARED!";:FORZ=1TO333:NEXTZ
710 RETURN
997 '***************** THE END ROUTINE **************
     *****
998 '************************************************
     *****
999 END
1000 '************************************************
     *****
```


MULLEN Computer Products

NEW TRS-80* CONTROL BOX

- 8 reed relay - OUTPUTS
- 8 opto-isolated - INPUTS
- Selectable port address
- Power supply
- Assembled cable & connectors

Special introductory price
M-80 OCTOPORT
$159. Assm/Tested



*TRS-80 is a trademark of Tandy Radio Shack Corp.

ASSEMBLED BURNED-IN & TESTED

Use your TRS-80, and our M-80 control box to program control energy savings devices at home or in your business. Send for our free application notes today.

MULLEN COMPUTER PRODUCTS, BOX 6214, HAYWARD, CA 94544
OR PHONE (415) 783-2866. VISA/MASTERCHARGE ACCEPTED.
INCLUDE $1.50 FOR SHIPPING & HANDLING. CALIFORNIA RESIDENTS ADD TAX.
✓285
Order Direct or Contact your Local Computer Store.

SOFTWARE CPU™

Machine language modules linking with TBUG

Super STEP: Single-step/TRACE/Disassembler for TBUG; the successor of TSTEP with the features of EMU, and more! Variable speed TRACE mode lets you run any Z80 machine language program under total control, absolutely invaluable for analysis or debugging.

- Disassembler posts Z80 mnemonic in scrolling field.
- Single-stepper displays selectable before/after Z80 Programming Models, stack elements and flag status.
- Variable speed TRACE mode animates Z80 Models and Disassembler under dynamic user control.
- Intelligent RAM Window Shows selected local RAM environments or user designated RAM area.
- Foreground/background breakpointing.
- Implicit keypad includes Backspace, Relative space, Block RAM displays, local editing, faster ^P and ^L, CLEAR, more.
- Super TLEGS relocates for total address space access.

Direct or single-step execution of CALLs and RSTs, fully independent display suppression, big booklet of instructions and examples. Super STEP is a Z80 **Software CPU™**.
16K Level II TRS-80, TBUG required. No. BL-0 ..... $19.95

EMU 02: Software emulation of the 6502 microprocessor. TBUG displays byte, EMU takes it from there. Now you can write, debug and execute 6502 programs **on your TRS-80.**

- Disassembler posts 6502 mnemonic in scrolling field.
- Single-stepper displays 6502 Processor Model, stack, flag status in before/after form.
- 4-Speed TRACE mode animates 6502 models, activates a keyboard scan port accessible to 6502 instructions.
- **Fast** interpretive RUN mode for realistic execution.
- Implicit keypad with Backspace, Relative space, more.

How to have a 6502 without having a 6502! Compare, contrast, learn a powerful programming language distinct from Z80 or BASIC, read Apple, PET code. A 6502 **Software CPU™**
16K Level II TRS-80, TBUG required. No. BL-1 ..... $24.95

Super TLEGS: Onboard relocator for TBUG, TSTEP, Super STEP
16K Level II TRS-80, TBUG required. No. LL-0 ..... $9.95

TSTEP: Single-stepper for TBUG, totally reifies your Z80.
16K Level II TRS-80, TBUG required. No. LL-1 ..... $11.95

Include .75 each postage, CA add 6%

ALLEN GELDER SOFTWARE
Box 11721 Main Post Office
San Francisco, CA 94101

TRS-80, TBUG tm Radio Shack/Tandy Corp.
Software CPU tm Allen Gelder Software.
✓79

TRS-80*

	Reg.	Our Price
● Level II-16K	849.00	749.00
● Expansion Interface	299.00	264.00
● Centronics Printers		799.00 & up
● Verbatim Diskettes		3.20 ea. or 32.00 box of 10
● Pertec Disk Drives		389.00
● TRS-80 Disk Drives		449.00

Business Software by

- Robitron
- Data Access Corp.
- Newdos + by Apparat

Specialist in complete business computer systems.

Garner's

Computer Center
615 East Avenue
Cedartown GA 30125 ✓206
404-748-3614 or 748-8585

*TRS-80 is a trademark of the Radio Shack Division of Tandy Corporation.

GIN!

YOUR TRS-80 CAN BE A TOUGH OPPONENT

GIN RUMMY 2.0 plays a strong game, good enough to challenge an expert player. Plays a full regulation game, keeps score to game level, allows rearrangement of player's hand, and changes strategy to counter its opponent's play. Hours of good card playing, a fascinating program, one you'll enjoy playing against and trying to beat. MGR-1 $14.95

CHECKBOOK PLUS solves the problem of monthly bank statement reconciliation. No cumbersome tape record keeping. Just do your checkbook once a month and let Checkbook Plus handle all the details and find the errors. MCB-1 $9.95

CALCULATOR PLUS is an on-screen or printing calculator, with chain and mixed calculations, memories for answer storage or calculations with constants. Item count and on-screen or printed review of long add-and-subtract operations. Optional dollar format. MPC-1 $9.95

CHECKBOOK PLUS and **CALCULATOR PLUS** both on one cassette. MC-2 $14.95

THE LISTMAKER Powerful, versatile program allows entry of 400 names with codes in 16K. Lists by code on-screen or to printer. Sorts, provides editing of name or code, dumping, loading lists. Ideal for clubs, organizations, small businesses, individuals. MLM-1 $9.95

✓90

MANHATTAN SOFTWARE, Inc.
P.O. Box 5200 Grand Central Station
New York City, New York 10017

✓Reader Service—see page 162

Lots of data to display?
Try these techniques for a tidier screen.

Display Formatting

Allan S. Joffe W3KBM
1005 Twining Road
Dresher PA 19025

The time will soon arrive when you wish to display large numbers of data bits on your monitor. You have been aware of the formatting aids, such as the four printing zones and the TAB function, built into the TRS-80. As a start, enter Listing 1 and Listing 2 and run first one and then the other for comparison.

You may have to carefully examine Listing 2 to fathom how you got the same 40 numbers that Listing 1 gave you. The item of concern is really the difference in format. In Listing 1 the consecutive numbering is basically horizontal, while in Listing 2 the consecutive numbering pattern is basically vertical. While it is a matter of choice, I prefer the Listing 1 approach when formatting data on the video screen.

Modifications

Now consider this slightly revised version of Listing 1. If you are working with this article at your computer (which is the way to fly), just make the appropriate changes in the listing on your screen (see Example 1). In line 7 there are three spaces between each X, X↑3 couplet.

When you run this program, you will see we have added some data to illustrate the formatting look. Beside each value of X (1 to 40) we now show the cube of each X value. If your TRS-80 has the same firmware quirk that my machine has, it will show a value of 8000.01 as the cube of 20. Now look at Example 2.

Line 70 may be a momentary headscratcher, but if you worked out how line 70 in Listing 2 functioned, the new line 70 in Example 2 will fall into place. Once again the difference in formats is a matter of taste and what you are used to. I personally opt for Listing 2.

Another formatting aid is shown in Listing 3. The equation in line 20 is a centigrade (Celsius) to Fahrenheit conversion based on the fact that −40 degrees is a point of numerical equality for both systems. Line 10 prints out Celsius temperatures from 0 to 102 degrees in steps of 2 degrees (in conjunction with line 30), and with the further aid of line 30, prints the corresponding Fahrenheit temperature beside the Celsius temperature.

The real value you get from this effort will only come if you enter the programs into your computer. Once you have a feel for and an understanding of the methods outlined here, then comes the fun. You can experiment and improvise, and in so doing you are in great danger of becoming a better programmer. Don't say I didn't warn you! ■

```
5  CLS
10 FOR X = 1 TO 40
20 PRINT X,
30 NEXT X
40 END
```

Listing 1.

```
50 CLS
60 FOR X = 1 TO 10
70 PRINT X,X + 10,X + 20,X + 30
80 NEXT X
90 END
```

Listing 2.

```
5  CLS
7  PRINT @0,"X  X↑3","X  X↑3","X  X↑3","X  X↑3"
10 FOR X = 1 TO 40
20 PRINT X; X↑3,
30 NEXT X
40 END
```

Example 1.

```
50 CLS
55 PRINT @0, "X  X↑3", "X  X↑3", "X  X↑3", "X  X↑3"
60 FOR X = 1 TO 10
70 PRINT X;X↑3,X + 10;(X + 10)↑3,X + 20;(X + 20)↑3, X + 30;(X + 30)↑3
80 NEXT X
90 END
```


Example 2.

```
5  CLS
10 FOR C = 0 TO 24 STEP 2
20 F = ((C + 40)•1.8) − 40
30 PRINT C;F,C + 26;F + 46.8,C + 52;F + 93.6,C + 78;F + 140.4
40 NEXT C
```

Listing 3.

The CONNECTION™

Telecommunication on *All* TRS-80's with or *Without* an Expansion Interface— For ONLY $249.00!

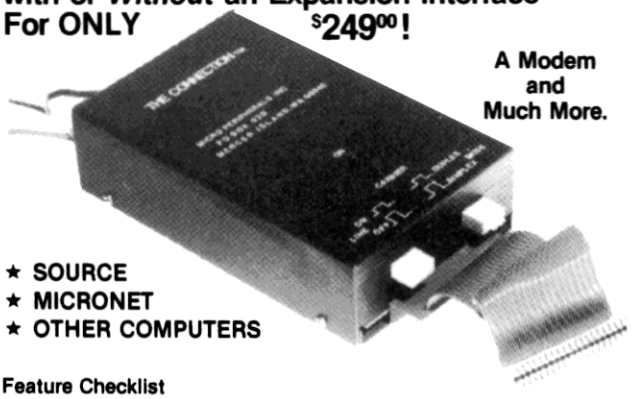

A Modem and Much More.

★ SOURCE
★ MICRONET
★ OTHER COMPUTERS

Feature Checklist

Direct connection between all TRS-80's (Level I 4K to Level II, 48K) and the telephone network without accoustic coupling.

RS-232 input / output operates printers and other serial interface devices.

Accurate performance at 300 baud (Bell 103 compatable).

Connects to two-way radio equipment for computer communications "over the air".

Supplied with software and documentation. Extensive optional software available.

For more information or to order:

the microperipheral corporation ✓306

P.O. Box 529 ▪ Mercer Island ▪ WA 98040

206 ▪ 454 3303

TRS-80* is a registered trademark of Tandy Corp.

TMCONNECTION is a trademark of The Microperipheral Corp.

Q W O R D F O R M A T T E R R B G C Y P Q G Z I V J B P C E B
S H N O B T X A D O F R E E I D E A S E E D S R P V Y X X O N
V L T W G Y R O S G R E D P V J K L M R H E C T V X H N A F H
B J E L F E Q A Z G Z P P C R Y P T O U P Z A X Z Q J E J T S
Z D Q I N K F S N A G T H L G F J S E Y W T V N P F J V Z V C
B V L F G U L M N S N E K O T T S C Y M B C G W B Q O F M P O
U O V Z K B F I O E P U Y A S E X M O L E R Z J X A C H Y R U
P K B M Y U C W O C G L D M R X S E W M C Z T I O N G U L Y K
Z M H O U P X B L K A C A P J J U K B F L I P C N E F Q A F E
J W T A Y C J G W H E T M N H A Q Z Q J L O W E R C A S E T H
H R S S K V C D G C B O A P T G T H T X T P M L E I L R E T Q
E Y I N D L X X C B C V X D Z H O P R Y V Y P R V A D N T O L

FREE IDEA SEEDS!™

Have you ordered yours? If not, you better reconsider. More than 5000 happy subscribers think you don't know what you are missing. These are FREE programs for your TRS-80 and all you have to do to get them is send us a legal size SASE. That is all there is to it. Simple? You bet! Every month there's a new program and you really don't want to miss any of them! When you stop and think about it there are only three ways to build your software library. One way is to write the program yourself. Another way is to purchase programs. The best way is to have the programs given to you and that is just what we are doing! All FREE IDEA SEEDS are our own original programs and we want you to have them to use, rewrite, and expand.

Send your legal size SASE to:

CECDAT, Inc. ✓62 PO Box 8963 Moscow, ID 83843

$29.00 1st 1,000 PAID ORDERS PER PACKAGE

ALL FOUR $99.00

SOPHISTICATED ACCOUNTING SOFTWARE

OSBORNE & ASSOC.
CBASIC, G/L, P/R, AR, AP (4 pkgs)
CONVERSION — TRS-80

East Coast Office
(703) 573-7300

West Coast Office
(801) 225-0497

FULL SERVICE ACCOUNTING & PROCESSING
5423 Crows Nest Ct. ✓133
Fairfax, VA 22030

M/C • VISA

**Regular price $49/$196*
Media & Manual Separate

You will appreciate this accessory every time you turn your computer on!

READ THIS

- Give your CRT the luminous green characters found on the very expensive computer systems.
- Add a professional look to your system and your programs.
- Dramatically improved contrast for easier reading and improved graphics.

We manufacture an optically correct, 1/8" plexiglas® screen that mounts easily over the CRT on your video monitor. This is a quality accessory that enables your TRS-80* monitor to produce the luminous green characters identical to those found on expensive terminals. For business applications this means enhanced appearance and reduced eye strain, for the hobbyist, graphics are brighter and bolder. The screen may be easily removed – no modification to monitor.

Screen for Model I $19.95
Screen for Model II $24.95
✓142 VISA - Mastercharge

We ship within 24 hours.
30-day money back guarantee


National Tricor, Inc. / 3335 Greenleaf Blvd., Kalamazoo, MI 49008 / 616-375-7519

Call us, **Write** us, or **Circle** our reader service #

If you like to receive mail related to the TRS-80* Model I or Model II, then send us your name and address. Companies and individuals all across the country have products and programs they want to tell you about. Products that will enable you to use and enjoy your computer more.

Each day a trip to your mailbox can bring you useful, interesting information on accessories, business programs, game programs, hardware, supplies, etc.

And by mailing directly to you the companies can go into greater detail on their products and services. So send your name and address today. Tell us if you own a Model I or Model II and if your interest is in personal/hobby or business use.



TRS-80* Reg. Trademark of Radio Shack

✓216

National Tricor, Inc./3335 Greenleaf Blvd./Kalamazoo, MI 49008/616-375-7519

Use your 80 to check test measurements automatically.

Testing 1, 2, 3

D. C. Nelson
4733 E. Linden
Tucson, AZ 85712

Have you ever wanted to use your computer as part of a measurement system? Soon after getting a computer, I began to wish that I could use it for recording and analyzing measurements from test instruments.

The thought of my computer functioning as a data logging tool was enticing, but the thought of having to manually key in the data was not. There had to be a better way!

Parallel Ports

Fortunately there is a better way. I am referring to the parallel port, that neglected feature commonly used for little more than reading keyboards or driving printers.

You can create both the hardware and software necessary to link your computer to outside measuring instruments without having to learn assembly language, since everything can be done under BASIC.

Although most of what is presented is oriented toward the TRS-80, it is by no means limited to it. The S-100 bus computers are equally usable. Let's look at some of the requirements for linking test equipment to a computer.

First, the data must be in a computer recognizable format and at TTL compatible levels. However, this does not mean that we are restricted to using only binary numbers. Binary code makes the most efficient use in space of a given number of bits but it is not always the easiest code to use.

By redefining the meaning of each bit position in an eight-bit-word, we can make the code easier to work with in terms of the outside world. This is called binary coded decimal, or BCD for short.

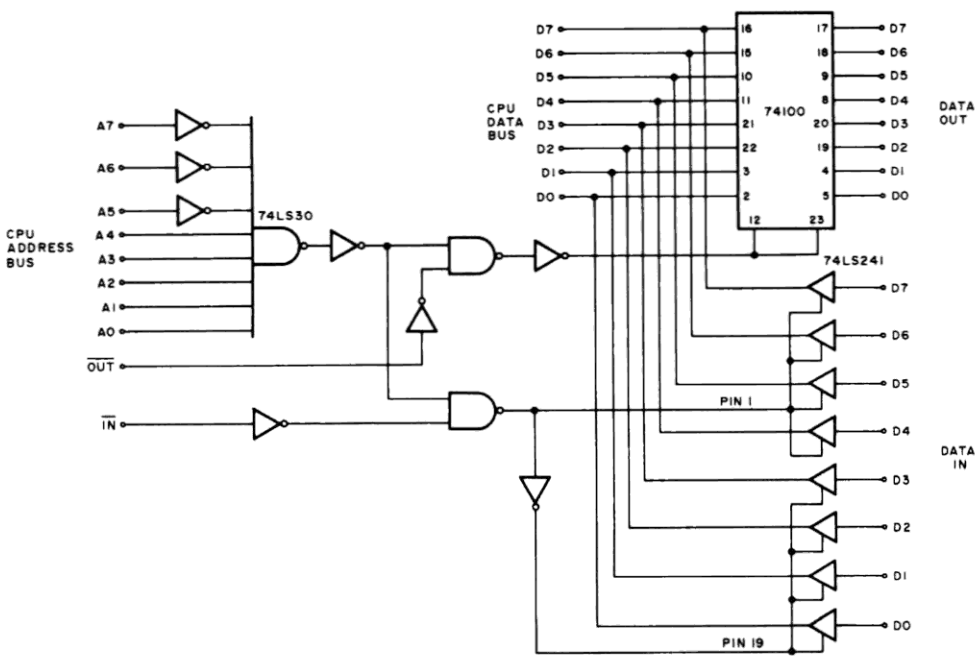


Fig. 1. One Parallel I/O Port. This example shows address 31 decoded.

BCD Data

A single eight-bit-word can express any binary value from 00000000 to 11111111, or from 0 to 255 decimal. In a single-decimal-digit, it takes four bits to specify any of the possible values from 0 to 9. The remaining binary combinations from 11 to 15 are discarded.

Since the computer operates on eight-bit-data, it is only logical to use the remaining four bit positions to represent another digit. Thus an eight-bit-word can be used to represent any number between 0 and 99 in BCD format. Unlike a straight binary format, we now have some bit patterns that are illegal. Example 1 shows how this process works.

Why go to BCD? A quick look through an IC catalog will give part of the answer. Many common components such as counters, A/D converters, and clock chips have BCD outputs already available. Many commercially available measuring instruments have auxiliary outputs that are BCD coded.

In addition, it is easier to tailor your computer to the number of digits you wish to resolve by using BCD.

BCD also has some disadvantages. First is the need for a method of converting between BCD and binary.

Second, to have a large number of BCD interfaces you must also have a large number of interconnections. Remember that each digit requires four bits, therefore four leads will be needed. For a six-digit frequen-

cy counter this means 24 bulky connections. (Multiplexing can cut this down but that gets more complicated.)

Hardware

Let's look at what it takes to get parallel data in and out of our computer. The TRS-80 has an edge connector on the back left that provides access to the CPU bus inside.

An explanation of the pinout can be found in the back of the Level I manual. Oddly enough, this diagram was omitted from the Level II manual in the system I worked on. You will need Level II BASIC to make both the hardware and software function properly.

The parts of the bus that interest us are the address lines, the data lines and the two control lines labelled $\overline{IN}$ and $\overline{OUT}$. The Z-80 CPU can address up to 256 I/O ports. When this is done in the TRS-80, the CPU places the port address (0-255) on the lower eight address lines and issues the appropriate $\overline{IN}$ or $\overline{OUT}$ control command at the rear connector.

If a word is being written to the port, the data bus will contain the byte being output and the $\overline{OUT}$ line will be strobed low. If an input byte is requested, the data bus is tri-stated to allow the input port hardware to place its byte on the bus and the $\overline{IN}$ line is strobed low.

Whether a specific port number is used for input or output depends upon the design of the external hardware. It can be both.

The first requirement in setting up a parallel port is for the computer to recognize its port address. This means we must decode a particular address. At the same time we must check to see if either the $\overline{IN}$ or $\overline{OUT}$ line is valid. These control lines tell us that the address is a port and not a memory.

Fig. 1 shows an example of how this works. First we must pick an address that is not already in use. Let's use 31 as an example.

The address bus has the appropriate lines inverted to make the inputs to the eight input NAND gate high when address 31 is given. This signal is inverted and gated with the inverted $\overline{OUT}$ command to form a strobe pulse for the latch.

For an input port we decode the address in the same way except we use the $\overline{IN}$ line. Instead of a latch, we must now use a tri-state buffer to place the input byte on the data bus. Note that it is possible for an input and an output port to have the same numerical address. The control lines tell which of the two is to be active.

Multiple Ports

Obviously, a single I/O port will not suffice for all measurement applications. In order to address at least four, and preferably eight ports, the address is decoded differently.

First, we will say that all port addresses will be contiguous, or numerically sequential. The lowest address will be the boundary of the block. Since eight ports will require three bits for the address within the block, this leaves five bits to define the block boundary.

Addressing a specific port now requires three events to be true: The proper boundary as defined by A3-A7; the proper three-bit address as defined by A0-A2; and the $\overline{IN}$ or $\overline{OUT}$ command as appropriate. Fig. 2 illustrates this. (There are other ways of implementing parallel I/O ports. This method is shown because of its simplicity and the low cost of the parts.)

If a full eight ports are placed on the bus, it should be buffered. If not, there is the possibility of overloading the bus with all the additional decoding and latching circuitry.

Also, if you locate your interface at the end of several feet of cable, you can introduce error causing reflections onto the bus. As a final thought, consider the consequences if something goes haywire externally; you end up damaging some ICs and your connections are straight onto the bus. Need I say more?

I built my buffer using tri-state gates on a small card that plugged straight into the edge connector. The buffer in turn had its own edge connector where the cable from the expansion interface was attached. I retained full use of the extra memory and the disk drive.

Circuit speed posed no problem. The $\overline{IN}$ and $\overline{OUT}$ signals are 1.4 microseconds wide, more than adequate settling time.

Incidentally, the manual showed one of the pins on the edge connector providing +5 volts. Check before you use it as mine turned out to be a ground. Because of the power draw of an eight port interface, plan on building a separate power supply.

(If you are working with an S-100 computer, see the article on building parallel port interfaces in the Oct. '77 issue of *Microcomputing*, pp. 102-108. Although the mechanics of decoding differ slightly, all other

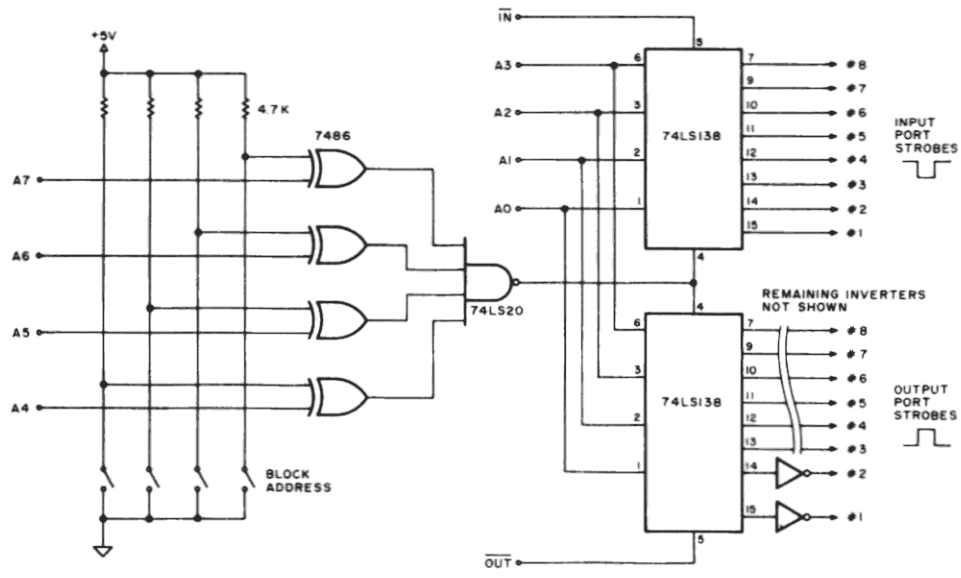


Fig. 2. Decoding 8 Parallel I/O Ports. Input & output circuits are the same as Fig. 2.

BINARY	BCD	DECIMAL
01010010	10000010	82
01001101	01111001	79
00000011	00000011	3
10000000	ILLEGAL	128

01010110 BCD = 56 DECIMAL

Example 1. Binary, BCD and Decimal Equivalents. One byte can represent any two digit number.

```
1000 REM BCD SUBROUTINE
1010 N = INP(8)                    N = 10010101 = 95 BCD
1020 N1 = N AND 15                 N1 = 00000101 = 5
1030 N2 = N AND 240                N2 = 10010000 = 9
1040 N2 = N2/16
1050 N = 10 * N2 + N1              N = 10 * 9 + 5 = 95
1060 RETURN
```

Example 2. Subroutine to read an decode two BCD digits. Bit masking and shifting are employed.

principles remain the same.)

Check your work by instructing the processor to write a specific byte to a port. Verify this with any instruments, from an LED to an oscilloscope.

At the same time make sure that none of the other output ports are affected.

To check an input port, selectively ground each bit and verify that the binary number returned changes by the appropriate power of two.

Software

Now that the hardware has been resolved, let's look at the necessary software. Under Level II BASIC we will make use of some special commands. The first are INP(X) and OUT(X,Y).

The statement A = INP(8) instructs the computer to read input port #8 and equate the value there to the variable A. (Note that at this time A can be from 0 to 255 decimal.)

To write to a port, tell the computer to OUT 8,Y and the value of Y in binary (not BCD) will appear on port #8. In the examples I am describing we cannot handle floating point numbers.

Now we need the ability to selectively examine specific bits for deciphering the incoming BCD data. Earlier I said that one byte, and therefore one port, can represent two BCD digits. Since the computer uses binary and we are using BCD, some translating will be necessary.

Assume we are using port #8 and that it contains the BCD representation of the number 95. Our program must read the port and return the number 95 in binary to the processor.

The first step reads the port and places the number in the variable N. Next we mask off, or zero, the four most significant bits, leaving only the units digit. This is directly equated to the variable N1 for temporary storage.

Then the four least significant bits of N are masked and the remaining bits are shifted right four places. This number is directly equated to N2 for storage. An artificial binary number is now created from each half of the BCD byte. Since the four least significant bits equate directly to 0-9 (not counting the illegals), the interpreted digit must lie in the four least significant bit positions. Anything else will give an erroneous result.

The final step is to multiply N2 by 10, add it to N1 and return the number as N. If this process is made into a subroutine, any portion of the program can get a two-digit number from port #8.

Example 2 shows the mechanics and the coding in more detail. Try it longhand to convince yourself that it works.

```
1000 REM 6 DIGIT BCD READ
1010 N1 = INP(8)
1020 N2 = INP(9)
1030 N3 = INP(10)
1040 N1 = N1 AND 15 + (N1 AND 240)/16 * 10
1050 N2 = N2 AND 15 + (N2 AND 240)/16 * 10
1060 N3 = N3 AND 15 + (N3 AND 240)/16 * 10
1070 N = N1 + 100*N2 + 10000*N3
1080 RETURN
```

Example 3. 6 digit BCD read subroutine.

Masking

The masking process is the key step in the conversion. Using the AND command makes it possible to selectively turn off any combination of bits in a word and leave the remainder unchanged.

Think of each bit in the input byte as one input to an AND gate and the other gate input as being the corresponding bit position in the mask word. If the mask bit is high, the gate output equals the second input bit.

If the mask bit is a zero, then the gate output is a zero, regardless of the state of the other bit. This command will act on all eight bits at once.

To determine the numerical value of the mask word, add the binary weight of the bit positions you want left unchanged.

Following the masking process (which leaves the tens digit), the shift right by four is accomplished through dividing by 16. Since dividing by two is the same as shifting every bit position right by one, it follows that a division by 16 will produce four shifts to the right. The code in Example 2 is shown one step at a time for clarity.

To obtain more than two digits of resolution (one part in a hundred is inadequate in many cases) use some of the additional ports to give whatever amount is necessary.

Each port is treated as in Example 2 except that the decoded numbers are scaled by the appropriate power of ten before being added. Remember when I said how easy it was to scale the system for any number of digits? All you have to do is to allocate sufficient ports and do the appropriate decimal scaling on the numbers. Example 3 shows a subroutine for reading a six-digit frequency counter connected to three input ports.

Output ports can be used to control relays, triacs, D/A converters, etc. One port can be used to control eight separate circuits by means of TTL compatible reed relays or optical isolators. The OR command controls any specific bit without affecting the others.

To establish how fast I could transfer values in and out I tried a couple of benchmark programs. In each case the program transferred 1000 values to a single port in a FOR NEXT loop while doing nothing else. The output was finished in 6.4 seconds while the input took 7.3 seconds. Using the subroutine in Example 3 took 115 seconds.

Obviously the calculations

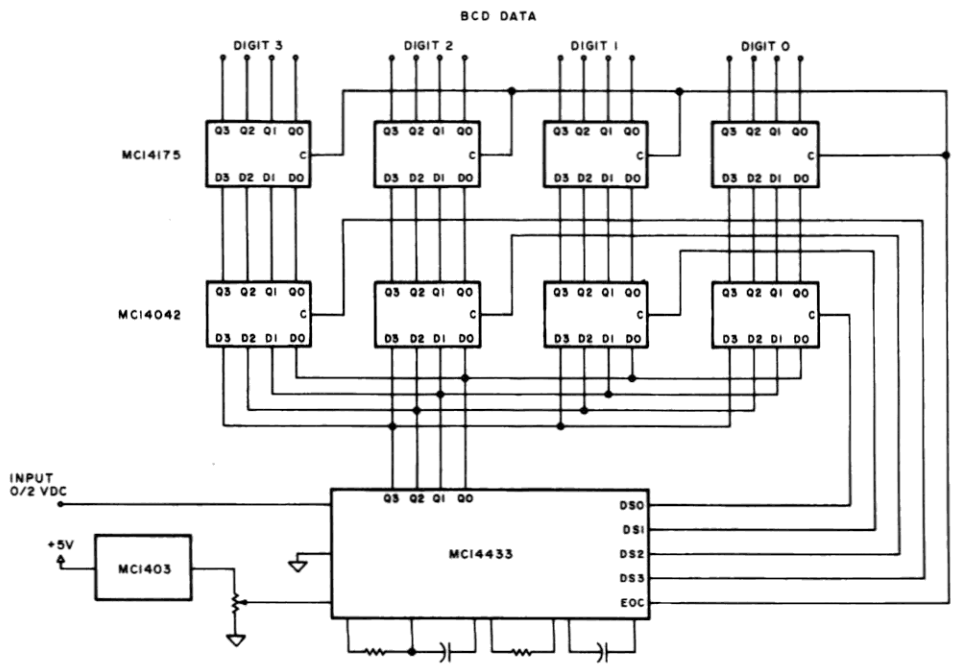


Fig. 3. Interfacing a DVM chip. Multiplexed data is in latched parallel format.

take their toll in speed. Consider however, the application you will be involved with, and if your experience echoes mine, the comparatively low speed is of little matter.

What is important is that the computer is now doing more work and the programmer less! Also, it is almost always necessary for the computer to wait idly while the external instrument makes its measurement.

A do nothing FOR NEXT loop can be used as a timer for such occasions. I have found that 340 iterations take one second.

Examples

Let's look at a circuit that uses the methods I have described. Fig. 3 shows an analog to a digital converter using the Motorola MC14433 IC. This chip is the basic building block for a 3½ digit DVM.

Note that most of the parts are used to convert the multiplexed BCD output to parallel latched BCD, which is compatible with the software described. This is a typical requirement for most instruments. In this application the multiplexing works against us. It is possible to directly read a multiplexed output, but it requires an intimate knowledge of the timing of both the instrument and the computer.

To do this, the computer must test the digit position it needs to read. When that digit is enabled, it must be read before the scan continues. All digits must be read in one scan so that an erroneous reading will not be returned. This would occur if the measuring instrument updated its reading to a new value while the computer was still trying to read the remainder of the original one.

Taking two readings and comparing them before returning to the calling program is a worthwhile check, if BASIC reads the data.

The circuit shown in Fig. 3 illustrates a typical requirement for latching multiplexed data. If you intend to build it, or need more information on this particular device, consult the Motorola CMOS manual.

You can also call a machine-language program from BASIC to demultiplex the data in software and POKE the digit pairs into successive memory locations. This eliminates the demultiplexing hardware.

The subroutine in BASIC would then be modified to PEEK the memory locations as a source of data. Since the final program will depend on the specific instrument being interfaced I will leave the rest to you. ■

lc lower case

ADD LOWER CASE TO YOUR CENTRONICS 779 or RADIO SHACK LINE PRINTER I with the 779 UPPERCASE/LOWERCASE "conversation kit" from SERVICE TECHNOLOGIES

Now you can expand the capabilities of your line printer to include WORD PROCESSING with a full 96 ASCII upper and lowercase character set. You can even change the slash zero to a standard zero.

Installs in minutes with an ordinary screwdriver.

Postage Paid only $1 25

Service Technologies, Inc.

32 NIGHTINAGLE ROAD
P.O. BOX 1426
NASHUA, NH 03061
(603) 883-5369

✓297

BUSINESS/ACCOUNTING SOFTWARE

Flexible **client write-up/general ledger system** designed by a CPA and developed by a computer specialist for CPA's, accountants and general businessmen provides large-scale computer features at micro-computer software costs:

* *designed for use by present employees*
* *allows for up to 500 accounts*
* *departmental financial statements including budgets*
* *retains standard journal entries*
* *automatic balancing of transactions*
* *fast entry & posting of transactions*
* *easy to follow audit trail*
* *conventional accounting symbols used*

For 9-program package on diskette with user manual send $495 to:

TASK COMPUTER APPLICATIONS
Dayton, Ohio PO Box 24001
45424
(513) 233-2118

✓147

MOVIE QUIZ

Never-ever repeats games
Hundreds of questions
3 levels—built in timer
Personal score each game
Movies from 20's to 80's
Entertains any age
TRS-80-16K-LEVEL II
Academy awards.....$ 9.95
Famous movies.....$ 9.95
Both casettes.....$14 95

QUARP PUB'S
P.O. Box 7416
Oxnard Ca. 93031

✓304

TRS-80 SPEEDUP BOARD / REVERSE VIDEO

SPEED MOD—You don't have to spend $3,500 on a TRS-80 Model II to get faster computing. Now you can speedup your Level II TRS-80—Disk systems included! —by up to 100% (50% guaranteed) with our speedup board. The result is more animated graphics, shorter program run times, and generally far greater computing power for your dollar. Change between normal and faster operation by using a simple BASIC statement. The contents of memory are not affected by speed changes and a switch is not required (a switch may be installed if manual speed select is desired). Changes are provided for NEWDOS, DOS 2.2, and DOS 2.3 that allow disk systems to run reliably at both the normal and accelerated rate. Buy the most versatile, easiest to install, and most publicly recognized speed mod on the market today. Recommended by *Interface Age*, January, 1980 issue.

ASSEMBLED & TESTED $24.95

REVERSE VIDEO is finally here! If you're tired of going blurry-eyed looking at your video display, then you are ready for reverse video. It provides dark black characters and graphics on an all white screen for a much crisper and much easier to read presentation. Change between normal and reverse by simultaneously pressing a combination of three keys on the keyboard.

ASSEMBLED $23.95

Add 5% for postage and handling
California residents add 6% sales tax

Archbold Electronics

Dept 80 • P.O. Box 7123 • Sacramento, CA 95826
(916) 362-3627

✓122

CHECK US OUT!

Order any of the software or books below from this ad and receive absolutely free, an issue of the Alternate Source (newsletter) and details on several great offers!

- **Z80ZAP** — the machine language monitor for accessing and modifying disk files. **$29.95**
- **TRS-80 Disk and Other Mysteries** — compliments Z80ZAP very well even though written for another monitor! **$22.50**
- **Disassembler 2.0** — for disk users. **$20.00**
- **Disassembler 1.2** — for Tape users. **$15.00**

(both 1.2 and 2.0 create output files that can be loaded with EDTASM!)

- **Packer** — Z80 compression for BASIC programs, move blocks, Renumber and more! Very useful for Level II or DOS! **$29.95**
- **Disassembled Handbook for the TRS-80** — (by Richcraft Engineering) Volume 1: **$10.00**/Volume II: **$15.00**
- **Structured Basic Translator** — a utility that enables you to use structured design techniques even with Basic! (disk only) **$29.95**

Please add $.50 per program and $1.00 per book for first class postage. We also handle NEWDOS+ and NEWDOS80 (which may or may not be officially announced by the time you read this). Call for more info. Box of 10 Verbatim Diskettes w/ Storage box — **$31.00** postpaid. Order directly from this ad! Mail to: The Alternate Source, 1806 Ada, Lansing, MI 48910. Phone six days! 517/487-3358. Michigan residents add 4¼% sales tax. TRS-80 is a trademark of the Tandy Corporation. The Alternate Source handles products for the TRS-80 exclusively, none of which are in any way affiliated or approved by Tandy.

✓138

BIDAM NOW AVAILABLE FOR TRS-80

Basic Indexed Direct Access Method (BIDAM) is a disk access method designed to simplify programming of disk applications, reduce disk I/O and space requirements and improve response time, while maintaining a key-sequenced index to a data file. **BIDAM** permits programmers to place emphasis on applications rather than file accessing techniques, sorting, searching and disk space management.

BIDAM functions are performed by invoking basic subroutines which include: key searching, changing, addition and deletion. Each subroutine returns a status code indicating the completion status of the requested function and a record number to enable direct retrieval of any record on file with one (1) I/O operation.

BIDAM ON DISKETTE WITH SAMPLE APPLICATION $79.00

TRS-80 is a trademark of the Radio Shack Division of Tandy Corporation.

TASK COMPUTER APPLICATIONS
Dayton, Ohio PO Box 24001
45424
(513) 233-2118

✓220

We haf veys of making you tell us the information, you, keyboard, you!

Keyboard Interrogation

Michael R. Yarbrough
14 Carmel Terrace
Hampton VA 23666

James B. Vosteen
1765A 11th Street
Hampton VA 23665

Have you ever wanted to do something over and over, while holding a key down? You found INKEY a little frustrating right? INKEY senses each key only once and then the key must be pressed again.

What about the time you designed a real-time two-player video game and tried to process several keys at once? Again you were left hanging, since INKEY only processes the last key pressed. You can overcome these INKEY limitations by directly accessing your keyboard memory, PEEKing.

The Keyboard

The TRS-80 keyboard consists of 53 single-pole single-throw normally open keys. The keyboard is designed as an 8 by 8 matrix with the eight address lines (A0-A7) running horizontally and the eight data lines (D0-D7) running vertically (Fig. 1).

The keys are divided into eight groups, most of them having eight keys per group. Each key represents an intersection of one address line and one data line. The CPU scans the data lines looking for an 'on' condition (logical 1); once this is found it begins scanning the address lines for a similar 'on' condition.

For example, if C is pressed the data value eight is stored into decimal address 14337; likewise if 5 is pressed the data value 32 is stored into decimal address 14352. This informatoin is then processed by the Level II ROM which checks to see if the shift key has been pressed and then converts the code into the correct ASCII equivalent.

Program Listing 1 generates Fig. 1 using Level II BASIC. Use it in the future when a program requires direct access to keyboard memory.

The reason direct access to keyboard memory is so useful is because a key's value can be repeated. The instant a key of a certain group is held down the address of that group will continue to have that key's data value as long as the key is held down. Once the key is let up, the value in that address immediately goes to zero. As long as a certain data value is contained within a group address you can execute a set of instructions. This function eliminates the frustration of using INKEY in your quick interactive games.

Another INKEY weakness is that it can only return one keystroke at any given time. Using PEEK you can detect two, three or even more keys being held down.

There are two ways of doing this depending on what type of processing you need. If you need speed, design your program to use keys of the same group—one PEEK and several IF statements in a row.

When looking for a single key pressed, use whatever data value is associated with that particular key. To check for two keys being pressed at the same time, take the data value of both keys, add them together and that is the value to check for.

For example, suppose we want to make a game that moves a rocket up and down the left side of the screen and fires to the right from wherever it is currently located. The program might work as follows: to go up, press the up arrow; to go down, press the down arrow; to fire, press both the up and the down arrows.

Note that the arrows are located in key group A6. The keyboard routine might look something like this:

```
100 Z = PEEK(14400)
200 IF Z = 8 GOTO 600
300 IF Z = 16 GOTO 700
400 IF Z = 24 GOTO 800
500 GOTO 100
    REM CONTINUE KEYBOARD
```

```
10 CLS:PRINT TAB(21)"KEYBOARD INTERROGATION":PRINT
20 PRINT"ADDRESS":X=14337:D=1:C=64:Z=192:V=Z
30 FORI=1TO4:GOSUB500:NEXTI
40 C=48:FORI=1TO2:GOSUB500:NEXTI
50 PRINT@V,X:V=V+8:PRINT@V,"ENTER  CLEAR  BREAK";
60 C=91:V=V+23:FORI=1TO4:PRINT@V,CHR$(C);
70 C=C+1:V=V+7:NEXTI
80 PRINT@V-2,"SPACE";:Z=Z+64:X=X+D
90 PRINT@Z,X:PRINT@Z+8,"SHIFT";
100 PRINT@731,"DATA VALUE";
110 V=777:D=1
120 FORI=1TO8:PRINT@V,D:D=D*2:V=V+7
130 NEXTI
140 GOTO140
500 PRINT@V,X:V=V+3:FORJ=1TO8
510 V=V+7:IFC>90THEN PRINT@V," ":GOTO530
520 PRINT@V,CHR$(C):C=C+1:IFC=60 THEN C=44
530 NEXTJ:Z=Z+64:V=Z:X=X+D:D=D*2
540 RETURN
550 END
```

Program Listing 1.

```
1000 CLS
1100 DIMH(8):H(1)=32:H(2)=32:H(3)=32:X=16349:V=0
1200 PRINT@ 1,"  *                THIS PROGRAM DEMONSTRATES              *"
1300 PRINT@ 65,"  ***          >>>  ALTERNATE KEYBOARD SCAN  <<<          ***"
1400 PRINT@129,"***** >>>  SIMULTANEOUS PROCESSING OF MULTIPLE KEYS  <<< *****"
1500 PRINT@193,"  ***          >>>  SINGLE AND REPEAT KEY FUNCTION  <<<    ***"
1600 PRINT@257,"   *           >>>  ALL USING THE BASIC PEEK FUNCTION  <<<  *"
1700 PRINT@402,CHR$(91)" - MOVES ROCKET UP"
1800 PRINT@466,CHR$(92)" - MOVES ROCKET DOWN"
1900 PRINT@530,CHR$(93)" - MOVES ROCKET LEFT"
2000 PRINT@594,CHR$(94)" - MOVES ROCKET RIGHT"
2100 PRINT@654,CHR$(91)" + "CHR$(93)" - MOVES ROCKET UP AND LEFT"
2200 PRINT@718,CHR$(91)" + "CHR$(94)" - MOVES ROCKET UP AND RIGHT"
2300 PRINT@782,CHR$(92)" + "CHR$(93)" - MOVES ROCKET DOWN AND LEFT"
2400 PRINT@846,CHR$(92)" + "CHR$(94)" - MOVES ROCKET DOWN AND RIGHT"
2500 POKEX-1,H(1):POKEX,H(2):POKEX+1,H(3)
2600 X=X+V:H(1)=PEEK(X-1):H(2)=PEEK(X):H(3)=PEEK(X+1)
2700 POKEX-1,188:POKEX,143:POKEX+1,188
2800 GOSUB3600
2900 IFX+V-1<15360ANDV=-67THENV=-3
3000 IFX+V-1<15360ANDV=-61THENV=3
3100 IFX+V-1<15360THENV=0
3200 IFX+V+1>16383ANDV=67THENV=3
3300 IFX+V+1>16383ANDV=61THENV=-3
3400 IFX+V+1>16383THENV=0
3500 GOTO2500
3600 Z=PEEK(14400)
3700 IFZ=8THENV=64
3800 IFZ=16THENV=64
3900 IFZ=32THENV=-3
4000 IFZ=64THENV=3
4100 IFZ=40THENV=-67
4200 IFZ=72THENV=61
4300 IFZ=48THENV=61
4400 IFZ=80THENV=67
4500 IFZ=0THEN3600
4600 RETURN
```

Program Listing 2.

600 Process up arrow and GOTO 100
700 Process down arrow and GOTO 100
800 Process both arrows and GOTO 100

Two or more keys pressed that are not in the same group must be checked separately. For example, if you are looking for the A and L keys pressed at the same time you can check it as follows:

```
X = PEEK(14337)
Y = PEEK(14338)
IF X = 2 AND Y = 16 GOTO ____
```

Keyboard Interrogation

Program Listing 2 is a demonstration of keyboard memory interrogation. The following is a brief description of each routine in Program 2:

1000-2400	Set up screen
2500-2700	Saves next rocket position Restores old position Moves rocket to next position
2800	Call keyboard scan
2900-3400	Make sure rocket doesn't go off top or bottom
3500	Continue looping
•••••	KEYBOARD SCAN
3600	Get data value
3700	Checks for up arrow
3800	Checks for down arrow
3900	Checks for left arrow
4000	Checks for right arrow
4100	Checks for up and left arrows
4200	Checks for up and right arrows
4300	Checks for down and left arrows
4400	Checks for down and right arrows
4500	Checks for no input—branches if true

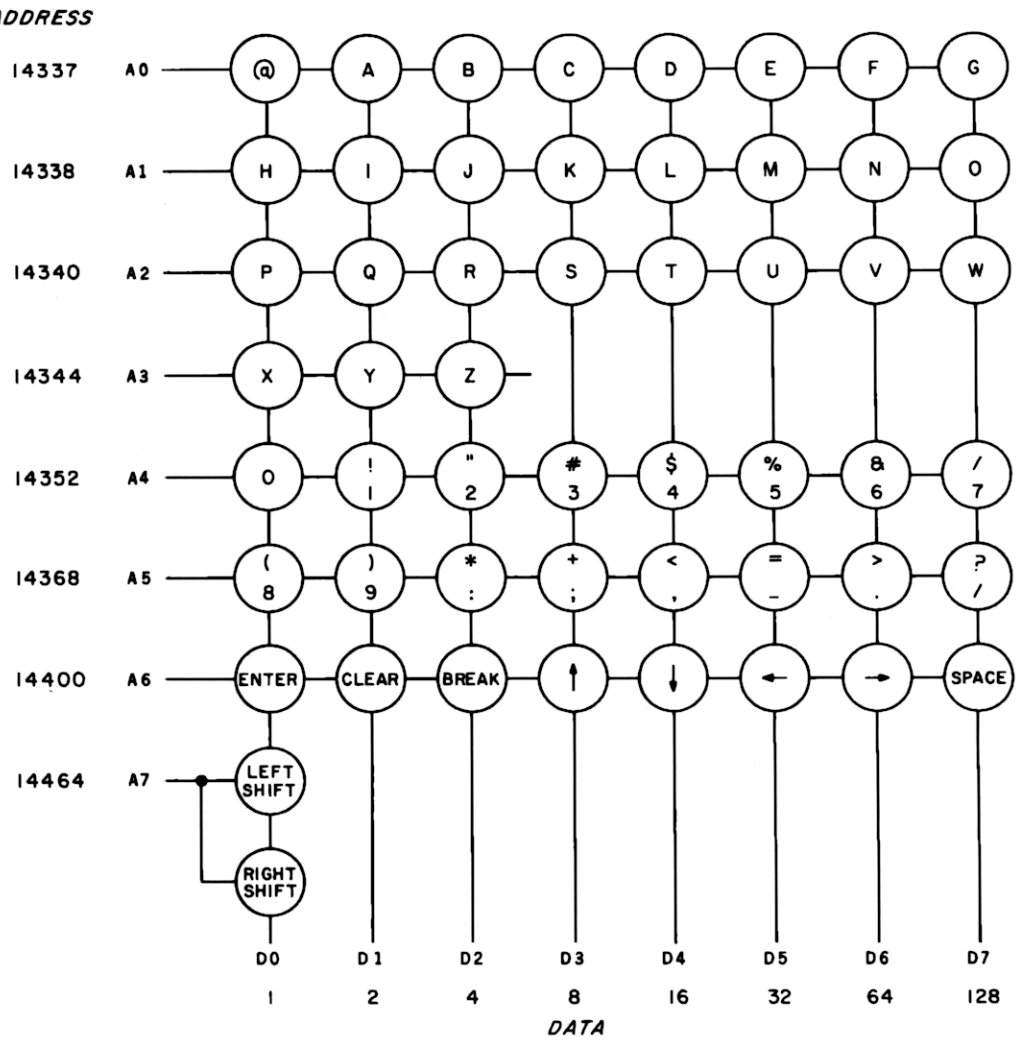


Fig. 1.

4600 Return to main program

Conclusion

In order to receive a response using the PEEK function, the key must be held down at the time the PEEK statement is executed. You will receive the same response as long as you hold down the key.

You can access all the keys using PEEK, except for BREAK and CLEAR. The reason being the Level II ROM Interpreter is constantly checking these keys and has priority over them.

INKEY remains a powerful function that allows input of an ASCII character (string) that can be used without further processing. Using a combination of INKEY and directly accessing the keyboard memory, PEEK, you will be able to meet most of your programming needs. ■


Subscribe to 80 microcomputing™

fill out the postage paid reply card on page 162

announcing the ***new***

PC80 INSTRUMENTATION INTERFACE

designed for the TRS-80*

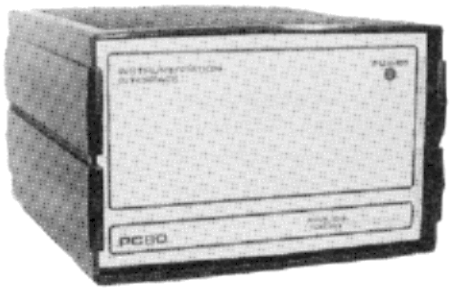

Applied Micro Technology introduces the first truly powerful Instrumentation Interface designed for use with TRS-80* microsystems.

The **PC80** connects directly to the Expansion Port Edge Card, and accomodates up to 4 of Applied Micro's Z-80* based special function circuit cards.

Circuit cards presently available are:

- **32-Channel A/D Converter** (12-bit resolution)
- **8-Channel D/A Converter** (1 to 5/10v, 4-20mA)
- **Programmable Clock** (w/battery back-up)
- **Floating Point Arithmetic Processor** (AM9511 based)
- **2-Channel Serial I/O** (RS-232C or current loop)
- **48-Bit Parallel I/O** (user configurable)

For complete information, contact

APPLIED MICRO technology ✓236

1842 W. Grant Road / Tucson, Arizona 85705
(602) 622-8605

* TRS-80 is a registered trademark of Tandy Corp.
* Z-80 is a registered trademark of Zilog Corp.

Use a Model 33 with your TRS-80, with no hardware modifications to your CPU.

Teletype Interface

Peter E. Noeth
6906 Lenwood Way
San Jose CA 95120

Perhaps, like myself, you don't have a line printer to obtain hard copy from your TRS-80 but do have access to a Model 33 Teletype. The following circuit and assembly language program provides the necessary interface to the TRS-80 CPU (keyboard) through a 40-pin ribbon cable without making any modifications to the unit. It requires the Level II ROM modification.

Whenever you power up your TRS-80, this program must be entered and started. If a program you are running crashes and you get "memory size" displayed on your screen, the program must be restarted because the normal initialization routine within the ROM will place the regular line printer pointer (058DH) in location 4026H and 4027H. If this happens, the teletype will still print but will not provide a line feed for each carriage return.

The Circuit

The address decoder section, made up of the 74LS30, 74LS139, 74LS155 and one gate of the 74LS04, decodes the address 37E8H. This is the memory mapped address for the line printer. When it is available on the address bus and RD line is pulsed low, pin-5 of the 74LS155 goes low enabling the Tri-State Buffer 74LS367. This places the binary bits 0011 or 3H on data lines D4-D7. The printer status routine within the ROM is looking for this combination to determine that the printer is ready for a character. The four bits are associated to the logic within the TRS-80 line printer. This interface only requires the use of one bit to indicate the printer is busy with an output.

If the WR is pulsed low when the address is decoded, pin-11 of the 74LS155 goes low taking pin-25 (TBRL) low on the UART. This loads the character on the data lines into the UART's internal buffer. Then, it is transferred to the transmit register for output as serial data on pin-25 (TRO).

The Intersil IM6402 UART that I used has two signals which indicate this activity.

Pin-22 (TRBE) goes low when the buffer is being loaded. Pin-24 (TRE) goes low for the duration of the output of the character on Pin-25 (TRO).

These two signals are ANDed together by the 74LS03. Its output is used to indicate "busy" status to the TRS-80. See Fig. 1 for the timing diagram.

The UART's reset is tied to the TRS-80 system reset line so that when you hit the reset button on your TRS-80, the UART will also be reset and will clear its internal registers.

The NE555 timer chip is used to provide the necessary clock input to the UART. The clock rate is 16 ×, therefore, an input frequency of 1.76 KHz will provide serial output of 110 Baud. The adjustment can be made with a frequency meter on pin-3 of the timer, if you have one, or can be adjusted using the teletype itself as follows: input the following basic program and enter run.

```
10 LPRINT "This is a test"
20 GOTO 10
```

This provides a continuous output to the teletype. Adjust the 50K potentiometer until the teletype begins to type the line correctly. Continue to turn the potentiometer until the teletype stops printing the message correctly. Noting the number of turns between these two points, readjust the potentiometer to a point midway. This should then provide the proper Baud rate.

The output at Pin-25 (TRO) is input to a gate of the 74LS04 which is used as a buffer for the 20MA current loop circuit. The two points marked + and − should be tied to the printer magnets in your Model 33 teletype using its instruction manual for the proper connections.

Hardware


I built my interface on a general purpose wirewrap card with a 44-pin card edge connector using sockets for all ICs. The ribbon cable was soldered to a 44-pin card edge connector as were the connections for the teletype and external +5V power supply.

The only caution with this interface is the IM6402 UART which is a CMOS device and requires the normal grounding for static when handling. Also, remember not to insert or remove this device with the power turned on.

The parts can be purchased

Quantity	Description
1	UART—Intersil IM6402
1	74LS139 2-line to 4-line decoder
1	74LS155 2-line to 4-line decoder
1	74LS04 Hex Inverter
1	74LS03 2-input nand-open col.
1	74LS30 8-input nand gate
1	74LS367 Tri-state buffer
1	NE555 Timer
1	2N3638 PNP transistor
2	4.7K 1/4W Carb. Comp. Resistor
2	100 ohm 1/4W Carb. Comp. Resistor
1	470 ohm 1/4W Carb. Comp. Resistor
1	10K 1/4W Carb. Comp. Resistor
1	10K 5% 1/4 Carb. Comp. Resistor
1	50K 20-turn P.C. Board Pot
2	.01 uf Mylar caps
1	.001 µf Mylar caps
	Misc.
1	40-Pin IC socket
3	16-Pin IC socket
3	14-Pin IC socket
1	8-Pin IC socket
1	General purpose 4.5 in. P.C. Board w/44-Pin card edge connector
1	44-Pin card edge connector
A/R	.1 uf Bypass caps (for I.C.s)
1	40-Pin ribbon cable w/connector
1	+5V 1 amp Power Supply

Parts list.

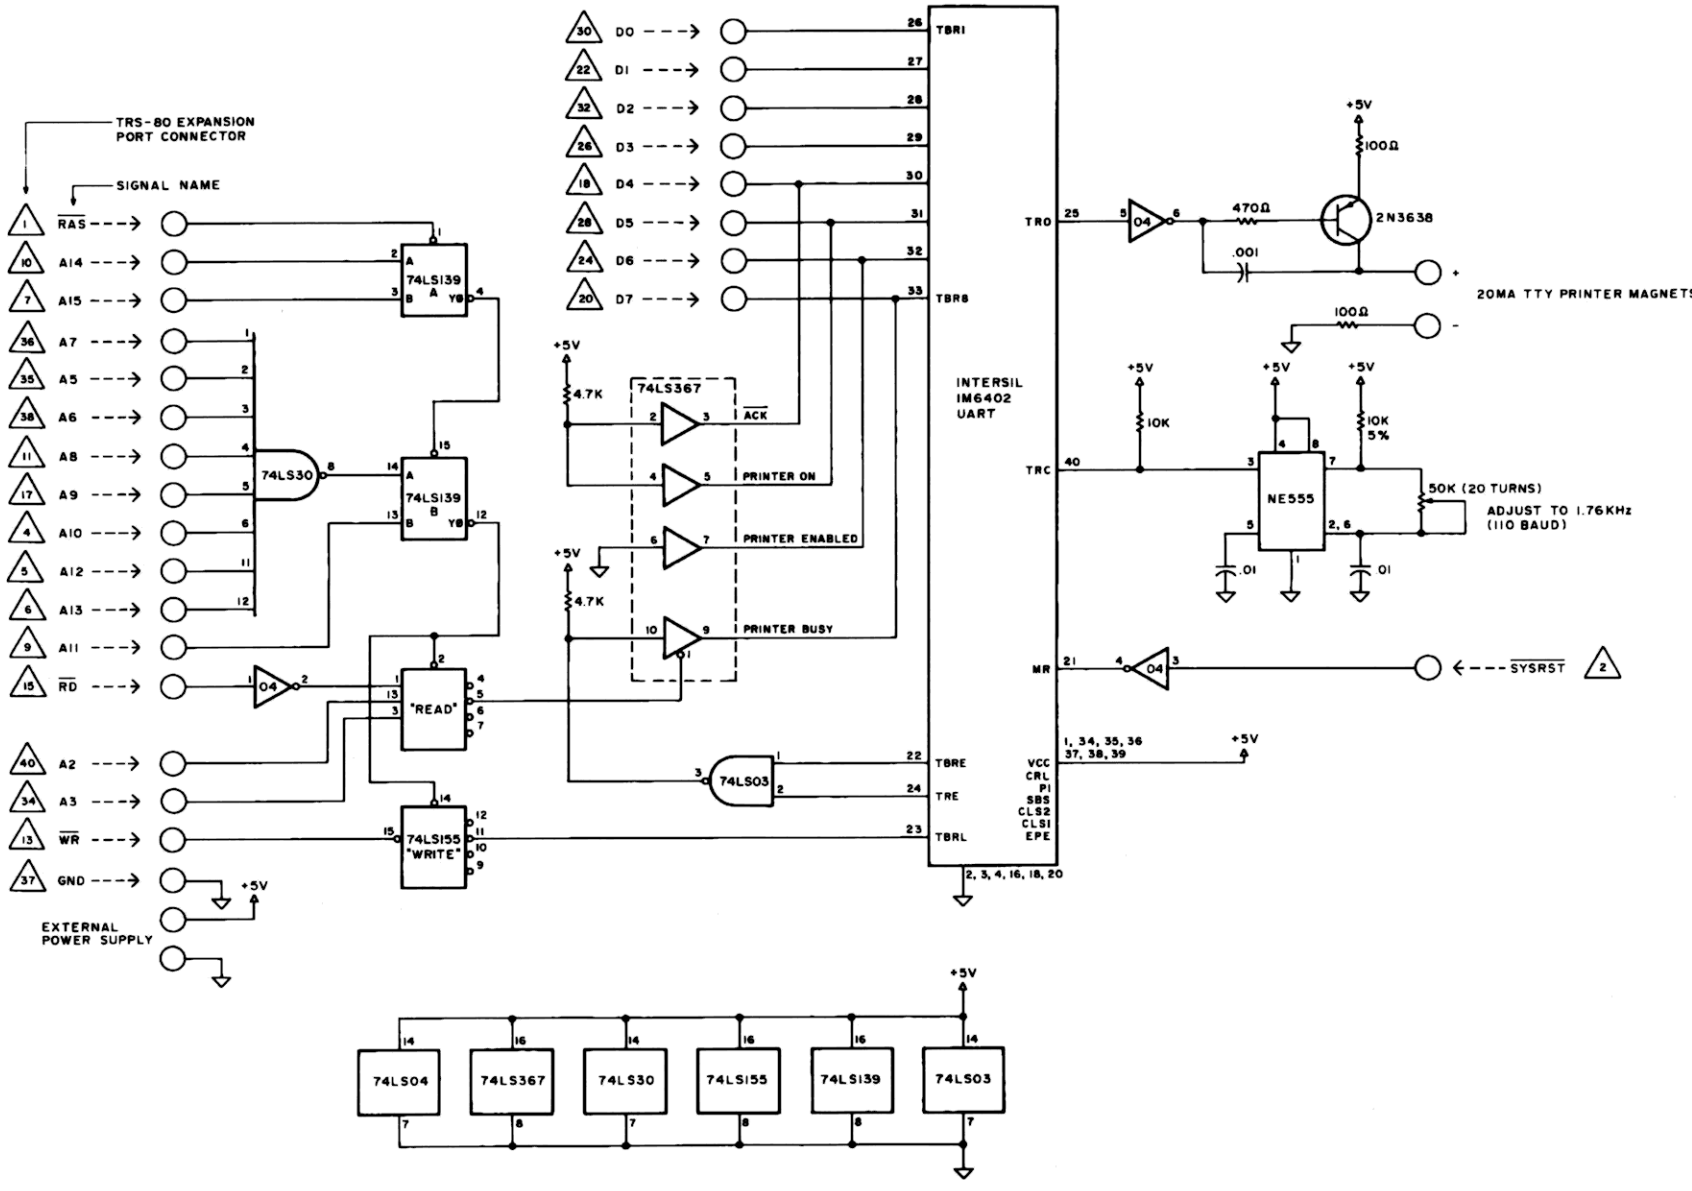

TRS-80 Teletype Interface.




Fig. 1. UART timing diagram.

from most of the suppliers who advertise in *80-Microcomputing*. All parts, except the UART and the ribbon cable can also be purchased from any Radio Shack store. A three-foot ribbon cable with 40-Pin card edge connector can be purchased from Electronic Systems, San Jose CA, part number 3CAB40 and the IM6402 UART from Advanced Computer Products, Irvine CA.

Any +5V DC power source can be used or a small one can be built. Don't attempt to borrow +5V from your computer because with the Level II modification and 16K RAM the power output is running close to maximum.

```
                    ORG     7F62H           ;32610 DECIMAL
7F62    267F        LD      H,7FH
7F64    2E6F        LD      L,6FH
7F66    22264Ø      LD      (4Ø26H),HL      ;NEW LINE PRINTER POINTER ADDRESS
7F69    3E39        LD      A,39H           ;56 LINES/PAGE
7F6B    32284Ø      LD      (4Ø28H),A
7F6E    CAØØ4Ø      JP      4ØØØH           ;REENTER BASIC WITH "SYNTAX ERROR"
                                            ;DISPLAYED ON SCREEN

7F6F    79          LD      A,C
7F7Ø    B7          OR      A
7F71    CAD1Ø5      JP      Ø5D1H           ;PRINTER STATUS ROUTINE IN ROM
7F74    F5          PUSH    AF
7F75    CDD1Ø5      CALL    Ø5D1H
7F78    2ØFB        JR      NZ,$-3          ;LOOP UNTIL PRINTER IS READY
7F7A    F1          POP     AF
7F7B    32E837      LD      (37E8H),A       ;OUTPUT THE CHARACTER
7F7E    FEØD        CP      ØDH             ;IS IT A "CR"?
7F8Ø    CØ          RET     NZ
7F81    CDD1Ø5      CALL    Ø5D1H           ;YES, WAIT UNTIL PRINTER IS READY
7F84    2ØFB        JR      NZ,$-3
7F86    3E8A        LD      A,ØAH           ;ASCII LINE FEED
7F88    32E837      LD      (37E8H),A       ;OUTPUT A "LF"
7F8B    DD34Ø4      INC     (IX+Ø4)         ;INCREMENT LINE COUNTER
7F8E    DD7EØ4      LD      A,(IX+Ø4H)
7F91    DDBEØ3      CP      (IX+Ø3H)        ;COMPARE TO LINES/PAGE (56)
7F94    79          LD      A,C
7F95    CØ          RET     NZ              ;IF NOT 56 LINES CONTINUE
7F96    DD36Ø4ØØ    LD      (IX+Ø4H),ØØH    ;ZERO THE LINE COUNTER
7F9A    Ø6Ø9        LD      B,Ø9H           ;LOOP COUNT FOR 9 LINE FEEDS
7F9C    CDD1Ø5      CALL    Ø5D1H
7F9F    2ØFB        JR      NZ,$-3
7FA1    3E8A        LD      A,ØAH
7FA3    32E837      LD      (37E8H),A       ;OUTPUT "LF"
7FA6    1ØF4        DJNZ    7F9CH           ;LOOP UNTIL (9) LF'S ARE OUTPUT
7FA8    C9          RET
```

Fig. 2. Assembly language program to interface a teletype to a TRS-80 16K, Level II.

Software

The assembly language program is shown in Fig. 2. The initialization routine loads the new line printer pointer into location 4026H and 4027H as well as changes the lines per page to 56. The routine checks for printer status (call 05D1H) and outputs the character when ready. It checks each character for a carriage return (0DH) and if it is found, outputs a line feed (0AH). It then increments the lines/page counter, compares it to the line/page number (39H) and if 56 lines have been printed, zeros the line counter and outputs nine line feeds. This extra line feed activity creates a typed page consisting of a top margin of nine spaces, and 56 lines of type for a sheet length of 11.0 inches. I have also included the routine in BASIC for those who do not have either "TBUG" or the "EDITOR/ASSEMBLER" to enter this program. See Fig. 3.

After turning on the CPU answer the memory size question with "/32610." This protects the interface program from any BASIC program you enter. Enter the interface program, using either BASIC or assembly language. Enter the "System" command and answer the prompt with "/32610". The display will return a "SN ERROR" and a READY> prompt.

This is because of the JP 4000H in the initialization routine. (I have not as yet found the entry point in ROM which returns a "ready" without re-initializating the various pointers in RAM.) The program is now ready and use of LPRINT and LLIST provides a line feed after each carriage return. ■

```
 1Ø REM *  Teletype Interface - 16K TRS-80 Level II*
 2Ø REM *  P.E. Noeth, San Jose, CA. May, 1979*
 3Ø REM *  Answer Memory Size? -- 3261Ø*
 4Ø REM *  Run this Program - Enter System Command*
 5Ø REM *  Answer Prompt with /3261Ø*
 7Ø For I = 3261Ø to 32680
 8Ø Read D
 9Ø Poke I, D
1ØØ Next I
11Ø End
12Ø Data   38, 127, 46, 111, 34, 38, 64, 62, 57, 50, 40, 118, 121, 183
13Ø Data   202, 209, 05, 245, 205, 209, 05, 32, 251, 241, 50, 232, 55
14Ø Data   254, 13, 192, 205, 209, 05, 32, 251, 62,  1Ø, 50, 232, 55
15Ø Data   221, 52, 04, 221, 126, 04, 221, 190, 03, 121, 192, 221
16Ø Data   54, 04, Ø, 06, 09, 205, 209, 05, 32, 251, 62, 1Ø
17Ø Data   50, 232, 55, 16, 244, 201
```

Fig. 3. BASIC program to interface a teletype to a TRS-80.

Scanned by Ira Goldklang - www.trs-80.com

THE TIME SAVER...



JPC Products Announces a New High Speed Cassette System
"The Poor Man's Floppy" for the TRS-80*
$90 Kit - $120.00 fully assembled.

The TRS-80* is a great small computer. But its cassette recording system can be very frustrating, particularly if you can't read an important cassette. JPC Products Company has developed an improved cassette system that uses your present cassette recorder but operates much faster with better reliability. The TC-8 plugs into the expansion connector on the back of the keyboard and saves and loads 5 times faster! Less than ONE BAD LOAD in a MILLION BYTES! With the VOLUME CONTROL ANYWHERE BETWEEN 1 AND 8. The TC-8 is available in an easy to assemble kit or fully assembled. JPC has an exclusive "can't fail" kit guarantee. If you build the TC-8 and for any reason it doesn't work, we will make it work at NO COST. All you have to pay is the shipping. We guarantee it. The TC-8 magic is partly done in software. So you have to load a small program in upper memory. It is usually out of the way there. We provide the software on a cassette that comes with the TC-8. Just load it in. Here's how you order. Send $90.00 for the kit ($120.00 fully assembled) plus $3.50 postage and handling to JPC Products Co., 12021 Paisano Court, Albuquerque, NM 87112 (N.M. Res. add 4% sales tax.) Credit card orders accepted by phone or mail.

JPC PRODUCTS CO.

✓190

*Trademark of Tandy Corporation

Phone: (505) 294-4623 12021 Paisano Ct. Albuquerque, N.M. 87112

✓Reader Service—see page 162

Treat assembly language tapes like BASIC with this interesting technique.

CLOAD Assembly Language

Alfred S. Baker, II
2327 S. Westminster St.
Wheaton, IL 60187

Have you used the Radio Shack T-BUG program, In Memory Information program or Editor/Assembler? If you have, then you are probably wondering how these programs steal the computer away from Level I BASIC. You type CLOAD, load the tape, and then the unexpected happens. Instead of getting the READY message, you are suddenly running the program on the tape. What happened to BASIC? Where did it go? How did Radio Shack do that?

I had to find out. Beyond simple curiosity, I needed to do it myself. In this article you will see the detection process I used to discover how Radio Shack uses the CLOAD command to load assembly language programs. I also provide a section of program code that will help you do the same thing with your assembly language programs.

Why Bother?

There are two ways to load an assembly language tape on a Level I TRS-80. The way Radio Shack tells you to do it is crazy. First, set the tape volume for Level I tapes and CLOAD the Editor/Assembler System tape. Next, change the volume to handle Level II tapes, type in the name of the assembly program's object file, and load that tape. And now comes the good part. The program should now be in the machine, but you still have to run it. To do this, type a slash (/) followed by the memory address of the program . . . in *decimal*, no less!

I had written a simple assembly language game for my two-year-old to play. My wife knows nothing about computers. Can you imagine me explaining this to her? Can you imagine the look she'd give me if I tried? You can also imagine how often she would do it. I'll pass her most likely comment on to Radio Shack: "You've got to be kidding!"

Fortunately, there is another way of doing it. The Editor/Assembler System tape, as well as the other programs I mentioned above, are all written in assembly language. They are all loaded with the CLOAD command. Unfortunately, how this is done is not documented. If my son was to enjoy the "benefits" of a computer-assisted education, then I had to figure it out.

The first step was to go to my friendly Radio Shack store and buy the T-BUG program. This useful little product lets the user look around in memory and, in general, find out what is going on. If you plan to write very many assembly programs, I recommend that you get it.

If I was going to figure out how to successfully abuse the CLOAD command, I needed an hypothesis.

The one I developed was based on the way I write large programs for Z-80-type computers. I assumed that the CLOAD routine gets control from the statement-reading routine via standard Z-80 CALL-RET Logic.

The statement routine reads the word CLOAD from the keyboard and does a CALL to the CLOAD routine. The CALL instruction in the Z-80 places the address of the next instruction in the statement-reading routine on the stack.

When the CLOAD routine has finished reading in a tape file, it issues a RET instruction. This instruction takes the top address off the stack and branches to it. This takes the computer back to the statement-reading routine.

Suppose the program being CLOADed replaces the address on the stack with its own address? Once the CLOAD routine is done it will pick up this new address and return to it. Voila! The CLOADed program has taken control of the computer away from BASIC!

There were two problems though. I didn't know where BASIC kept its stack, and even if I did, I still didn't know where on the stack the CALL instruction would place the return address from the CLOAD routine. If I was going to replace it, I had to know where it was.

First I had to find the stack. This turned out to be simple. At the back of the Editor/Assembler manual is a list of the addresses for important routines. One of the addresses, 01C9H, is the entry point for Level I BASIC. I loaded T-BUG and, using its MEMORY command, looked at the routine beginning at 01C9H. One of the first things BASIC would have to do would be to set up the location of its stack. The first three bytes at this location were 310042. Paydirt!

If you know your Z-80 machine language (or have a reference book), you'll recognize these three bytes as the in-

```
;REPLACE THE CORRECT STACK LOCATION.
41FE            00100    ORG 41FEH
41FE 0042       00200 TESTAD DEFW TEST
;SET UP THE LOOP VALUES:
;   HL->TV SCREEN
;   A= THE LOWEST CHARACTER VALUE
0000            00300 TEST DEFS 0
4200 21003C     00400    LD HL,3C00H ;TV
4203 97         00500    SUB A
;NOW FOR THE LOOP.  EACH SUCCESSIVE
;CHARACTER IS PLACED IN EACH
;SUCCESSIVE SCREEN POSITION UNTIL WE
;ARE BACK TO CHARACTER 00.
0000            00600 LOOP1 DEFS 0
4204 77         00700    LD (HL),A
4205 23         00800    INC HL
4206 3C         00900    INC A
4207 20FB       01000    JR NZ,LOOP1
;THE PROGRAM IS DONE.  PROVE IT BY
;LOOPING FOREVER.
0000            01100 LOOP2 DEFS 0
4209 18FE       01200    JR LOOP2
0000            01300    END
```

Fig. 1. Testing the CLOAD hypothesis.

```
;DEFINE THE PROGRAM START AND OTHER
;IMPORTANT SYSTEM ADDRESSES.
4400            00100   ORG 4400H
0000            00200 BEGIN DEFS 0
0FE9            00300 CASON EQU 0FE9H
0F4B            00400 CASOUT EQU 0F4BH
0EF4            00500 CASIN EQU 0EF4H
01C9            00600 BASIC EQU 01C9H
4200            00700 BSTACK EQU 4200H
; SET UP THE TWO ENTRY POINTS. THE
;FIRST IS USED TO RUN THE PROGRAM FROM
;TBUG. THE SECOND IS USED TO CREAT A
;CLOADABLE TAPE.
4400 C35044     00800   JP RUN
4403 C31144     00900   JP CREATE
;THE LOAD ROUTINE IS READ IN BY THE
;CLOAD COMMAND BEGINNING WITH THE
;INSTRUCTION LABELED LOADAD. ONCE
;LOADED,IT GETS CONTROL AND LOADS IN
;THE REST OF THE PROGRAM AND EXECUTES
;IT.
4406 0642       01000 LOADAD DEFW BSTACK
0006            01100 LOAD DEFS 6
4408 CD E90F    01200   CALL CASON
440B CD F40E    01300   CALL CASIN
440E C35044     01400   JP RUN
003B            01500 LOA100 EQU $-LOADAD
;THE CREATE ROUTINE DOES ALL THE SETUP
;WORK. IT MOVES THE LOAD ROUTINE DOWN
;TO LOCATION 41EFH AND THEN CREATES
;THE CLOADABLE TAPE FOUR TIMES FOR
;SAFETY. EACH OF THE FOUR SETS CON-
;SISTS OF TWO FILES: THE LOAD ROUTINE
;AT 41FEH AND THE ENTIRE PROGRAM AT
;4400H
;
;FIRST, THE LOAD ROUTINE IS MOVED:
0000            01600 CREATE DEFS 0
4411 31 8444    01700   LD SP,ENDIT+32
4414 21 0644    01800   LD HL,LOADAD
4417 11 FE41    01900   LD DE,BSTACK-2
441A 01 0800    02000   LD BC,LOA100
441D ED B0      02100   LDIR
;NOW SET UP FOR FOUR COPIES.
441F 06 04      02200   LD B,4
0006            02300 CRE100 DEFS 6
4421 C5         02400   PUSH BC

;WRITE THE FIRST FILE: THE LOADER.
4422 CD E90F    02500   CALL CASON
4425 21 FE41    02600   LD HL,BSTACK-2
4428 21 0942    02700   LD DE,BSTACK-2+
                                LOA100
442B CD 4B0F    02800   CALL CASOUT
;NOW WAIT A BIT
442E 21 0000    02900   LD HL,0
0000            03000 CRE150 DEFS 0
4431 23         03100   INC HL
4432 7C         03200   LD A,H
4433 B5         03300   OR L
4434 20 FB      03400   JR NZ,CRE150
;OUTPUT THE REAL THING: THE PROGRAM
4436 CD E90F    03500   CALL CASON
4439 21 0044    03600   LD HL,BEGIN
443C 11 5044    03700   LD DE,ENDIT
443F CD 480F    03800   CALL CASOUT
;WAIT A BIT AGAIN
4442 21 0000    03900   LD HL,0
0000            04000 CRE200 DEFS 0
4445 23         04100   INC HL
4446 7C         04200   LD A,H
4447 B5         04300   OR L
4448 20 FB      04400   JR NZ,CRE200
;THE BOTTOM SIDE OF THE 4 TIMES LOOP
444A C1         04500   POP BC
444B 10 D4      04600   DJNZ CRE100
444D C3 C901    04700   JP BASIC
;THIS IS THE PROGRAM START LOCATION:
0000            04800 RUN DEFS 0
;
;
;       PLACE THE PROGRAM TO BE
;       CLOADED HERE.
;
;
0000            04900 ENDIT DEFS 0
0000            05000   END
```

Listing 1. The instructions needed to prepare an assembly- language program for loading with the CLOAD command.

struction "LD SP,4200H." SP is the stack register and 4200H is where the BASIC stack is located. One down and one to go.

Now I had to find out which address on the stack I had to replace. Again, a little thought presented me with an easy answer. I had just loaded T-BUG, hadn't I? T-BUG is one of those enigmatic programs that already was doing what I was trying to do. *If* it didn't use the same stack and *if* it didn't cover its trail, then somewhere on the BASIC stack should be the starting address for T-BUG, 40B1H.

This address is provided in the Editor/Assembler documentation. I took a look at the addresses on the BASIC stack using the T-BUG memory command. Again success! The T-BUG starting address was sitting at location 41FEH, the first position on the BASIC stack.

Into the Lab

So far, I only thought I knew what was going on. Now I had to run an experiment. The test I decided on was quick, but it presented a slight gamble. I assumed that T-BUG didn't use the 13 bytes between memory locations 41FEH and 420AH. Using the memory command, I hand loaded the machine language code for the program in Fig. 1. I then used the T-BUG tape Punch command to put it on tape. I had a tape that *should* CLOAD on a Level I TRS-80.

Studying the program in Fig. 1 will tell you that it prints out the entire set of characters on the TV screen and then loops forever. I turned off the computer and then turned it back on. I wanted to make sure that the test wouldn't be fouled by anything left in memory.

Next, I CLOADed my test tape. It suddenly became difficult to read the screen. It was filled up with a large collection of characters. Not only that, but the keyboard wouldn't respond. The computer had gone into a loop. I had successfully CLOADed a home grown assembly language program.

Doing It Right

So much for the prototype. I needed a "production" version of this code. I needed a program or routine that could be used to create a CLOAD-able version of any assembly language program. Listing 1 contains the result. I place this piece code at the beginning of each of my assembly language programs. It divides the program into three logical components: CREATE, LOAD and RUN.

The easiest way to describe this program addition is to take the three parts in reverse order. The RUN component is the original assembly language program unchanged. The only difference is that the line ENDIT DEFS 0 is added just before the END line.

The LOAD routine contains three statements. It turns on the cassette tape, reads in a file and then jumps to the RUN program. Which file does it read in? Oddly enough, it is reading in everything: the CREATE, LOAD and RUN programs. How can a program read itself in? This is handled by the first component of the program.

The CREATE routine performs the actual magic of this act. First, it copies the LOAD routine down to locations 41FEH to 4208H. The condition for CLOADing an assembly program has been met. The location on the stack that must be replaced, 41FEH, now points to 4200H. Location 4200H now contains a routine that will load a tape file containing the RUN routine and jump to it.

Now that the conditions have been set up, a tape must be prepared. The tape is written out four times. I never trust data on tape just once. The repeated section of code generates two tape files separated by a time delay loop. The first file is the LOAD routine beginning at location 41FEH. The second file is the complete program. We now have a tape of an assembly language program that can be loaded with the CLOAD command.

Why didn't I let the entire program begin at location 41FEH instead of moving a load routine down to that location? I had two reasons. I use T-BUG, which sits in locations 4000H to 43FFH. Also, when I flip between my program and BASIC, BASIC destroys the contents of 41FEH. That is where its stack is, remember?

Conclusion

What have we learned? First, even with a computer with poor or missing system documentation, such as the TRS-80, it is still possible to learn a lot about the behind-the-scenes software. All that is needed is a little careful thought and some diligent experimentation. You must also have at least a few simple tools to work with, but without the former, they are nearly useless.

Finally, we now have a simple method for loading TRS-80 assembly language programs. A process that Radio Shack made too complicated can now be done by my six-year-old daughter. As for two-year-old Nathan, his mother is having a ball teaching him on "her" computer.■

Use your disks to store questions and answers.

Quiz Master

Richard R. Eckert
Colegio De Ciencias
Universidad Catolica
de Puerto Rico
Ponce, PR 00731

Because of the microcomputer revolution presently occurring, it is feasible for individual departments of universities or colleges to purchase sophisticated computing equipment that can be used in a myriad of different applications.

One such application creates question and answer files for exams and quizzes. Such a technique is used by the Physics and Chemistry Departments of the Catholic University of Puerto Rico in multi-section introductory courses.

The university recently purchased a Radio Shack TRS-80 microcomputer with expansion interface, dual mini-floppies and a friction feed line printer. The total cost was slightly more than $3000.

Two computer programs written in TRS-80 Disk BASIC form the heart of our exam-creation technique. The first program (Listing 1) permits a professor or secretary to add questions to a file on a mini-diskette. The second program (Listing 2) is used to prepare a quiz with questions selected from a given file either at random or by the professor.

Once the questions have been selected, they are printed out on a ditto master on the line printer. The professor can then run off as many copies of his quiz as he desires.

File Creation

The first program reserves string space for all of the string variables used in the program, including 255 bytes for the characters used in a question. This number was determined by our decision to use just one physical record (255 bytes) for each question.

In practice our courses are divided into chapter-size units with common objectives. We create one file for each unit, which usually means some 50 to 100 questions. Since the capacity of a Radio Shack formatted data diskette is 85,760 bytes, we can place up to 335 questions on one disk. This means some three to six course units per disk, and, depending on the course, some four to eight diskettes for all of the questions in a course. (Since our project has just begun, we have actually created only four question files on one diskette.)

After clearing string space, the first program gives the user instructions. First, he is told to place the correct diskette in position and then asked the name of the file (course unit) to which he is going to add questions. The variable used for this name is Y$. The program requests the number of the last

Program Listing 1.

```
10 REM  <THIS PROGRAM WAS WRITTEN BY RICHARD R. ECKERT>
20 REM  <BOX 145, STATION 6, PONCE, PUERTO RICO  00731>
30 REM  <ITS PURPOSE IS TO STORE QUIZ QUESTIONS IN A DI
    SKETTE FILE>
40 CLS
50 CLEAR1000
60 PRINT
70 PRINT"PUT THE CORRECT DISKETTE IN DISK DRIVE # 1"
80 PRINT"TELL ME THE NAME OF THE QUESTION FILE YOU WISH
    TO USE"
90 INPUTY$
95 Y$=Y$+":1"
100 PRINT"WHAT IS THE NUMBER OF THE LAST QUESTION FILED
    ";
110 INPUTN
120 PRINT"HOW MANY QUESTIONS DO YOU WANT TO FILE NOW";
130 INPUTM
140 PRINT
150 PRINT"WHEN YOU ARE ENTERING A QUESTION, DO NOT USE
    THE <ENTER>"
160 PRINT"KEY UNTIL YOU HAVE FINISHED IT.  IF YOU COME
    TO THE END"
170 PRINT"OF A LINE BEFORE THE END OF THE QUESTION, USE
    THE DOWN ARROW"
180 PRINT"IN ORDER TO CONTINUE ON THE NEXT LINE.  WHEN
    YOU HAVE FIN-"
190 PRINT"A QUESTION, HIT <ENTER>, AND THE COMPUTER WIL
    L ECHO BACK EX-"
200 PRINT"ACTLY WHAT IT HAS RECEIVED.  YOU WILL THEN HA
    VE THE CHANCE"
210 PRINT"TO ENTER THE QUESTION AGAIN IF THERE ARE ERRO
    RS."
220 PRINT
230 PRINT"WHEN YOU SEE THE SIGN ==>, BEGIN TO ENTER A Q
    UESTION."
240 PRINT"HERE WE GO."
250 PRINT
260 FORI=1TOM
270 PRINT"QUESTION #";I+N
280 PRINT"==>";
290 LINEINPUTA$
300 CLS
310 PRINTA$
320 PRINT
330 PRINT"ARE THERE ANY ERRORS (YES OR NO)";
340 INPUTC$
350 IFC$="YES"THEN270
360 PRINT
370 PRINT"NOW WE'LL FILE THE QUESTION"
379 REM  <OPEN THE FILE AS A RANDOM ACCESS FILE USING B
    UFFER # 1>
380 OPEN"R",1,Y$
389 REM  <FIELD THE BUFFER---HERE WE MAKE ALL 255 BYTES
    AVAILABLE FOR THE QUESTION>
390 FIELD1,255 AS D$
399 REM  <PLACE THE QUESTION IN THE BUFFER>
400 LSETD$=A$
409 REM  <PUT THE CONTENTS OF THE BUFFER INTO RECORD NU
    MBER I+N OF THE FILE>
410 PUT1,I+N
420 CLOSE
430 NEXT
```

question filed (N); if it is a new unit he should answer with a zero. The next few print statements describe the way in which the user should enter questions.

The important point here is that when the user comes to the end of a line, but not the end of the question, he should use the down arrow instead of the ENTER key. This is necessary since the LINEINPUT instruction (used later in the program) terminates the input of a string when it receives an ENTER (ASCII code 10 or 13). The down arrow (ASCII code 26) causes the computer to jump to the next line without terminating the input of the string.

After the program finishes giving the user instructions, the loop beginning at line 260 asks for a question, receives it in the variable A$ through the LINEINPUT instruction (line 290), prints the question as received and asks if there are errors or not (lines 300 to 330). If so, the user must enter the question again. If not, lines 370 to 420 file the question A$ in the appropriate record (I + N) of the appropriate file Y$. The file is then closed, and the loop repeats.

Selecting Questions

The second program selects questions from a file and prints them on a ditto master in the line printer. The user must insert the correct diskette, give the computer the name of the question file desired (Y$), the total number of questions in the file (N), the number of questions to be selected for the quiz (M), and whether they are to be chosen at random or by the user.

If they are to be selected at random, the computer will make the selection without duplications (lines 260 to 320), print out the numbers chosen, and ask whether they are satisfactory (lines 330 to 370). If not, it will choose another random group. If the user wishes to choose his own questions, the computer will request the numbers desired (lines 210 to 240).

The program finally instructs the user to place a blank ditto master in the line printer, and, when everything is ready, proceeds to get the selected questions from the file and prints out the quiz (lines 410 to 520).

General Comments

Although we are just starting to use the exam-creation technique it seems especially helpful to those instructors who have many sections of the same course and wish to give frequent quizzes without duplicating questions.

Also in small departments which do not have a full-time secretary (such as in our Physics Department), the technique can be of enormous value, as countless hours of typing time are saved.

In the near future we hope to modify the technique so that the question files can be created on cassette tape using a simple TRS-80 Level II BASIC system. Entering these questions is really time-consuming! ■

Program Listing 2.

```
10 REM  <THIS PROGRAM WAS WRITTEN BY RICHARD R. ECKERT>
20 REM  <ITS PURPOSE IS TO SELECT QUESTIONS FROM A DISK
    ETTE FILE AND>
30 REM  <TO PRINT THEM ON A DITTO MASTER IN THE LINE PR
    INTER.">
40 PRINT
50 DIMZ(20)
60 CLS
70 CLEAR1000
80 PRINT"PLACE THE CORRECT DISKETTE IN DISK DRIVE # 1."
90 PRINT"TELL ME THE NAME OF THE QUESTION FILE YOU WISH
    TO USE."
100 INPUTY$
110 PRINT"WHAT IS THE NUMBER OF QUESTIONS IN THE FILE";
120 INPUTN
130 PRINT"HOW MANY QUESTIONS DO YOU WANT IN YOUR QUIZ";
140 INPUTM
150 PRINT
160 PRINT"NOW WE'LL SELECT THE QUESTIONS---IF YOU WANT
    THEM AT RANDOM,"
170 PRINT"ANSWER WITH AN  'R'"
180 PRINT"IF YOU WANT TO SELECT THEM YOURSELF, USE ANY
    OTHER KEY."
190 INPUTC$
200 IFC$="R"THEN260
210 PRINT"ENTER THE NUMBERS OF THE QUESTIONS YOU DESIRE
    ---ONE BY ONE"
220 FORJ=1TOM
230 INPUTZ(J)
240 NEXT
250 GOTO400
259 REM  <THE FOLLOWING ROUTINE SELECTS THE QUESTIONS A
    T RANDOM>
260 FORJ=1TOM
270 Z(J)=RND(N)
280 IFJ=1THEN320
290 FORL=1TOJ-1
300 IFZ(L)=Z(J)THEN270
310 NEXTL
320 NEXTJ
330 PRINT"THE QUESTIONS CHOSEN WERE:"
340 FORJ=1TOM
350 PRINTZ(J)
360 NEXTJ
370 PRINT"IS THE SELECTION SATISFACTORY (YES OR NO)";
380 INPUTE$
390 IFE$="NO"THENPRINT"WE'LL TRY AGAIN":GOTO260
400 PRINT
410 PRINT"NOW WE'LL GET THE QUESTIONS FROM THE FILE AND
    PRINT THEM"
420 PRINT"ON A DITTO MASTER IN THE LINE PRINTER."
430 PRINT"PUT THE DITTO MASTER IN THE PRINTER AND TURN
    IT ON."
440 PRINT"WHEN YOU'RE READY HIT ANY KEY."
450 INPUTF$
459 REM  <OPEN THE FILE AS A RANDOM ACCESS FILE USING B
    UFFER # 1>
460 OPEN"R",1,Y$
469 REM  <FIELD THE BUFFER---ALL 255 BYTES FOR A QUESTI
    ON, AS IN THE FILING PROGRAM>
470 FIELD 1, 255 AS D$
479 REM  <BEGIN LOOP TO GET AND PRINT THE QUESTIONS CHO
    SEN>
480 FORJ=1TOM
489 REM  <GET RECORD # Z(J) FROM THE FILE AND PLACE IT
    IN THE BUFFER>
490 GET1,Z(J)
499 REM  <PRINT OUT ON THE LINE PRINTER THE QUESTION SE
    LECTED>
500 LPRINTD$
510 NEXT
520 CLOSE
```


"TRS-80 is a registered trademark of TANDY CORP."

Call about our fantastic price on 4-drive complete system.

Level II 4K	$557.10
Level II 16K (w/o num. keypad)	$750.00
Expansion Interface	$269.00
Expansion Interface 16K	$403.20
Expansion Interface 32K	$524.00
16K Memory Kit for TRS-80 or Apple	$79.95



TRS-80 & NORTH STAR ADD-ON DRIVES

CUSTOM ENCLOSURE



CABLE INCLUDED

Single drive system in custom enclosure	$414.12
Single drive system in metal enclosure	$375.00
Double drive system in custom enclosure	$824.14
MPI	$279.00
MPI, B52, dual headed	$349.00
Shugart SA400	$286.00
Shugart SA800	$479.00
Tandom single sided	$279.00
Tandom double sided	$425.00
Siemen 8" drive	$430.00
Single tier w[illegible] enclosure for Shugart	$27.00
Double tier [illegible] enclosure for Shugart	$45.00
Atari 400 [illegible]	$548.49
Atari 800 [illegible]	$994.49
Hazeltine [illegible] warranty	$649.95
Centronics PI [illegible] (TRS-80 add on)	$398.95
Centronics 779-3 [illegible] (TRS-80 add on)	$1049.95
TI Printer	$1599.00
Base 2	$599.00
Horizon 1, 32K	$2290.00
Superbrain	$2695.00

SPECIAL! MINI FLOPPY DISKS, box of 10 (with plastic box) only $28.00 (without plastic box) only $26.50. Box of 10. 8" disks (in plastic box $30.00). Centronic 779 ribbons $3.50 each. ↙303

WE ACCEPT BANK AMERICARD, VISA, MASTER CHARGE

29-02 23RD AVENUE ASTORIA, NEW YORK 11105

(800) 221-1340 (212) 728-5252 Telex #420001 ETLX

↙Reader Service—see page 162

THE ORIGINAL MAGAZINE FOR OWNERS OF THE TRS-80™* MICROCOMPUTER

SOFTWARE FOR TRS-80™ OWNERS

MICRO COMPUTRONICS INC.

MONTHLY NEWSMAGAZINE FOR TRS-80™ OWNERS

MONTHLY NEWSMAGAZINE
Practical Support For Model I & II

- PRACTICAL APPLICATIONS
- BUSINESS
- GAMBLING • GAMES
- EDUCATION
- PERSONAL FINANCE
- BEGINNER'S CORNER
- NEW PRODUCTS
- SOFTWARE EXCHANGE
- MARKET PLACE
- QUESTIONS AND ANSWERS
- PROGRAM PRINTOUTS

. . . . AND MORE

PROGRAMS AND ARTICLES PUBLISHED IN OUR FIRST 12 ISSUES INCLUDE THE FOLLOWING:

- A COMPLETE INCOME TAX PROGRAM (LONG AND SHORT FORM)
- INVENTORY CONTROL
- STOCK MARKET ANALYSIS
- WORD PROCESSING PROGRAM (FOR DISK OR CASSETTE)
- LOWER CASE MODIFICATION FOR YOUR VIDEO MONITOR OR PRINTER
- PAYROLL (FEDERAL TAX WITHHOLDING PROGRAM)
- EXTEND 16 DIGIT ACCURACY TO TRS-80™ FUNCTIONS (SUCH AS SQUARE ROOTS AND TRIGONOMETRIC FUNCTIONS)
- NEW DISK DRIVES FOR YOUR TRS-80™
- PRINTER OPTIONS AVAILABLE FOR YOUR TRS-80™
- A HORSE SELECTION SYSTEM***ARITHMETIC TEACHER
- COMPLETE MAILING LIST PROGRAMS (BOTH FOR DISK OR CASSETTE SEQUENTIAL AND RANDOM ACCESS)
- RANDOM SAMPLING***BAR GRAPH
- CHECKBOOK MAINTENANCE PROGRAM
- LEVEL II UPDATES***LEVEL II INDEX
- CREDIT CARD INFORMATION STORAGE FILE
- BEGINNER'S GUIDE TO MACHINE LANGUAGE AND ASSEMBLY LANGUAGE
- LINE RENUMBERING
- AND CASSETTE TIPS, PROGRAM HINTS, LATEST PRODUCTS COMING SOON (GENERAL LEDGER, ACCOUNTS PAYABLE AND RECEIVABLE, FORTRAN 80, FINANCIAL APPLICATIONS PACKAGE, PROGRAMS FOR HOMEOWNERS, MERGE TWO PROGRAMS, STATISTICAL AND MATHEMATICAL PROGRAMS (BOTH ELEMENTARY AND ADVANCED) AND

FREE

WORD PROCESSING PROGRAM
(Cassette or Disk)
For writing letters, text, mailing lists, etc., with each new subscriptions or renewal.

LEVEL II RAM TEST
(Cassette or Disk)
Checks random access memory to ensure that all memory locations are working properly.

DATA MANAGEMENT SYSTEM
(Cassette or Disk)
Complete file management for your TRS-80™

CLEANUP
(Cassette or Disk)
Fast action Maze Game.

FREE

* TRS-80™ IS A TRADEMARK OF TANDY CORP

SEND FOR OUR NEW 48 PAGE SOFTWARE CATALOG (INCLUDING LISTINGS OF HUNDREDS OF TRS-80™ PROGRAMS AVAILABLE ON CASSETTE AND DISKETTE). $2.00 OR **FREE** WITH EACH SUBSCRIPTIONS OR SAMPLE ISSUE.

MICRO COMPUTRONICS INC.
MATHEMATICAL APPLICATIONS SERVICE™

Box 149 New City, New York 10956

24 HOUR ORDER LINE
(914) 425-1535

ONE YEAR SUBSCRIPTION $24 .....
TWO YEAR SUBSCRIPTION $48 .....
SAMPLE OF LATEST ISSUE $ 4 .....
START MY SUBSCRIPTION WITH ISSUE .....
(#1 - July 1978 • #7 - January 1979 • #12 - June 1979 • #18 - January 1980)
NEW SUBSCRIPTION ..... RENEWAL .....

CREDIT CARD NUMBER _____ EXP. DATE _____

SIGNATURE _____

NAME _____

ADDRESS _____ STATE _____ ZIP _____

*** ADD $6/YEAR (CANADA, MEXICO) - ADD $12/YEAR AIR MAIL - OUTSIDE OF U.S.A., CANADA & MEXICO ***

H&E COMPUTRONICS INC.

•••EVERYTHING FOR YOUR TRS-80™•••

TRS-80 is a trademark of the Radio Shack Division of Tandy Corporation

★ *All Orders processed within 24-Hours*
★ *Free Shipping within U.P.S. areas (add $3 for orders outside of the U.S.A. or U.P.S. areas).*
★ *30-Day Money Back Guarantee on all Software (less a $3 penalty for handling).*
★ *10-Day Money Back Guarantee on Disk Drives and Printers* **PLUS** *120-Days Free Service.*

- **LEARNING LEVEL II** by David Lien
The Original Author Of The Level Manual
A Step By Step approach to Learning Level II especially geared to new TRS-80™ Owners
$15.95

- **TRS-80 DISK AND OTHER MYSTERIES $19.95 ($22.95 after 2/1/80).** Over 100 pages of indespensible information for disk owners. Learn to recover information from bad disks, how to make Basic programs unlistable and 12 more chapters of never published tips and information. Written by H.C. Pennington. (For all Disk Owners)

NEW SBSG BUSINESS SYSTEM FOR MODEL I OR MODEL II - IN STOCK
- General Ledger
- Accounts Receivable
- Accounts Payable
- Payroll
- Inventory Control With Invoicing
• Each module can be operated individually or as a coordinated **SYSTEM.** Turn-Key error catching operation for beginners
• Complete manual and documentation accompany each program
• Minimum System requirements 2-Disk Drives for Model I...1-Disk Drive for Model II
• Each module can be formatted to span data on Upto 4-Disk Drives
• Free 30-Day telephone consultation
• Call for complete specifications
• Model I Version $125 per module $495 per System
• Model II Version $225 per module $995 per System

DATA MANAGEMENT SYSTEMS
- DMS replace index cards or any data requiring long lists of information.
• TBS In-Memory Information System (for cassette systems) $24.50
• TBS Disk Data Manager (requires 1 or more disk drives)...Set up fast random access files in minutes. Stores up to 320K of information on 4 Drives. Up to 10 fields and 255 characters per record. Supports upper and lower case RS-232 or TRS-232... Features complete editing $49.50
• Personal Software CCA Data Management System...Completely user oriented, menu drive, 130 page Step by Step Manual... capable of inventory control, sorting data, reporting data in nearly any form (for reports and mailing labels). Sorts data by up to 10 fields for zip code, balance due, geographic location or whatever. Prints reports with subtotals and totals automatically calculated. Fast random access $75.00

FROM RACET COMPUTES
- **REMODEL-PROLOAD** - Renumbers program lines, combines programs. The only renumber program that will renumber the middle of a program. Specify 16K, 32K or 48K. Works with Cassette or Disk . . . **$34.95**
- **GSF** - Use in your Basic Programs for Instant Sorting (will sort 1000 items in 9 seconds). Other commands include Compress and Uncompress Data, Duplicate Memory, Display Screen Controls and Fast Graphic Controls . . . **$24.95** (For Cassette or Disk, specify 16K, 32K or 48K)
- **DOSORT** - All G.S.F. commands plus special Multiple Disk Sorting Routines . . . **$34.95** (Specify 32K or 48K)
- **INFINITE BASIC** - Adds 70 commands to your TRS-80 including Instant Sort, Matrix Commands, String Commands, Left and Right Justification, String Centering, Simultaneous Equations, Upper and Lower Case Reverse and more . . . **$49.95** (For Cassette or Disk)
- **INFINITE BUSINESS** (Requires Infinite Basic) - Eliminate Round-off error, 127-Digit Calculation Accuracy, Insert New Elements in Sorted Arrays, Automatic Page Headings, Footings, and Pagination, Multiple Precision Arithmetic and more . . . **$29.95.** (For Cassette or Disk)
- **COPSYS** - Copy Machine Language Programs . . . **$14.95** (For Cassette only)

FROM SMALL SYSTEM SOFTWARE
- **RSM-2** Machine Language Monitor . . . **$26.95**
- **RSM-2D** Disk Version of RSM-2 . . . **$29.95**
- **DCV-1** Converts Machine Language Programs from tape to disk . . . **$9.95**
- **AIR RAID** - The ultimate TRS-80 game converts your TRS-80 into a real time shooting gallery . . . **$14.95**
- **BARRICADE** - A fast pong style game . . **$14.95**
- **CPM** - $150 (for Disk only)
- **TRS-232 INTERFACE** - Interface with Software driver RS-232 printers to your TRS-80 . . . **$49.95**
- **TRS-232 FORMATTER** - Additional (optional) Software for TRS-232 owners. Ads many printer commands to your TRS-80 . . . **$14.95** ($9.95 with purchase of TRS-232)

- **MAIL PAC** - For Model I or Model II Disk Systems only . . . **$99.95.** Quick-sorting full user control over mailing list from Gallactic Software

FROM ADVENTURELAND INTERNATIONAL
- **ADVENTURE #1 - #8** by Scott Adams . **$14.95 each** . . . available on Cassette or Disk

SARGON II
THE CHESS CHAMP
$29.95

FROM APPARAT
NEW DOS + $99.95
35, 40 and 77 Track Versions available

FROM THE BOTTOM SHELF
- **CHECKBOOK II** (for Cassette or Disk) . . **$18.50**
- **INFORMATION SYSTEM** (for Cassette or Disk . . . **$24.50**
- **SYSTEM DOCTOR** (a complete diagnosis of your TRS-80 . . . checks memory, video, cassette, disk, ROM and all other parts of your system) - for Cassette or Disk . . . **$28.50**
- **CHECKBOOK REGISTER ACCOUNTING SYSTEM** (requires 2 disk drives) . . **$49.50**
- **LIBRARY 100** - 100 established business, game and educational programs plus **FREE** Tiny Pilot all for . . . **$49.50**
- **BASIC TOOL KIT** - lists all variables, GOTO's and GOSUB's in your program . . . **$19.80**

- **SOUNDWARE** - Ads sound to your TRS-80. Just plug it in . . . **$29.95.** Sample programs included.
- **TING TONG** - Can be used with Soundware for a **Sound** version of pong . . . **$9.95.**

- **VIC-The Carta Visual Instructional** $19.95 **Computer Program**
The **Level II** 16K Cassette is designed to teach beginners the Basics of Machine Language and Assembly Language Programming. See every Machine Language Instruction Display on your Video.
VIC includes a Step By Step 55 page manual.

VISTA V80 DISK DRIVE
110 K OF STORAGE
$395
Add $29.95 for Cable
(Free with Purchase of Two Disk Drives).
— 10 Day Money Back Guarantee —

FROM HOWE SOFTWARE
MON-3 - Machine Language Programming for Beginners. **MON-3** is a Complete System Monitor with Users Manual . . . **$39.95**
MON-4 - Disk Version of **MON-3** . . . **$49.95**

LEVEL III BASIC . . . $49.95 FROM MICROSOFT - Now Cassette owners can add Disk Commands to their TRS-80 without owning a Disk Drive.

- **BRAND NEW OLIVETTI PRINTER . . . $2495** Business Letter quality print, Automatic Line Justification (on request), Quick Printing, can be used as a Memory Typewriter, plugs right into your TRS-80 without any modification or software.

THE ELECTRIC PENCIL
Cassette . . . $99.95
Disk . . . $150.00

- **HORSE SELECTOR II** by Dr. Hal Davis . . . **$50.** The TRS-80 version updated for the TRS-80 and originally reviewed in Systems and Methods.

H&E COMPUTRONICS INC.
MATHEMATICAL APPLICATIONS SERVICE

Box 149 New City, New York 10956

✓9

48-Page Catalog $2 **FREE** *With Any Order*

Order by Phone or Mail
No Shipping Charge
Add $3 for C.O.D.
Add $3 for all Foreign and non-UPS shipments
Add $3 for UPS Blue Label

24 HOUR ORDER LINE
(914) 425-1535

✓Reader Service — see page 162

THE COMPUTRONICS INC.

...EVERYTHING FOR YOUR TRS-80™...

TRS-80 is a trademark of the Radio Shack Division of Tandy Corporation

SMALL BUSINESS SYSTEMS GROUP

COORDINATED BUSINESS SYSTEMS

- EACH MODULE CAN BE OPERATED INDIVIDUALLY OR AS A COORDINATED SYSTEM.
- TURN-KEY ERROR CATCHING OPERATION FOR BEGINNERS
- FREE 30-DAY TELEPHONE CONSULTATION WITH SBSG
- EACH MODULE CAN BE FORMATTED TO SPAN DATA ON UPTO 4 DISK DRIVES.
- COMPLETE MANUAL AND DOCUMENTATION ACCOMPANY EACH MANUAL
- MINIMUM SYSTEM REQUIREMENTS - 2 DISK DRIVES FOR MODEL I...1-DISK DRIVE FOR MODEL II

ACCOUNTS PAYABLE

The accounts payable system receives data concerning purchases from suppliers and produces checks in payment of outstanding invoices. In addition, it produces cash management reports. This system aids in tight financial control over all cash disbursements of the business. Several reports are available and supply information needed for the analysis of payments, expenses, purchases and cash requirements. All A/P data feeds General Ledger so that data is entered into the system just once. These programs were developed 5 years ago for the Wang micro-computer and have been tested in many environments since then. The package has been converted to the TRS-80™ and is now a well documented, on-line, interactive micro-computer system with the capabilities of (or exceeding many larger systems.

CAPABILITIES

★ menu driven; easy to use; full screen prompting and cursor control
★ invoice oriented; everything revolves around the invoice; handles new invoice or credit memo or debit memo
★ invoice information recorded; invoice #, description, buyer, check register #, invoice date, age date, amount of invoice, discount (in %), freight, tax ($), total payable
★ transaction print and file maintenance procedures insure accuracy
★ flexible check calculation procedure; allows checks to be calculated for a set of vendors - or - for specific vendors
★ program prints your checks; contiguous computer checks with your company letterhead can be purchased from SBSG
★ reports include (samples on back):
  - open item listing/closed item listing - both detail and summary
  - debit memo listing/credit memo listing
  - aging
  - check register report (to give an audit trail of checks printed)
  - vendor listing and vendor activity (activity of the whole year)
★ fully linked to GENERAL LEDGER; each invoice can be distributed to as many as five (5) different GL accounts; sysem automatically posts to cash and A/P accounts

ACCOUNTS RECEIVABLE

The objective of a computerized A/R system is to prepare accurate and timeley monthly statements to credit customers. Management can generate information required to control the amount of credit extended and the collection of money owed in order to maximize profitable credit sales while minimizing losses from bad debts. The programs composing this system were developed 5 years ago, especially for small businesses using the Wang Microcomputer. They have been tested in many environments since then. Each module can be used stand alone or can feed General Ledger for a fully integrated system.

CAPABILITIES

★ menu driven; easy to use; full screen prompting and cursor control
★ invoice oriented; invoices can be entered before ready for billing, when ready for billing, after billing or after paid
★ allows entry of new invoice, credit memo, debit memo, or change/delete invoice
★ allows for progress payment
★ transaction information includes:
  - type of A/R transaction
  - customer P.O. #
  - description of P.O.
  - billing date
  - general ledger account number
  - invoice amount
  - shipping/transportation charges
  - tax charges
  - payment
  - progress payment information
  - transaction print and file maintenance procedures insure accuracy
★ customer statements printed; computer statements with your company letterhead can be purchased from SBSG
★ reports include; (samples on back)
  - listing of invoices not yet billed
  - open items (unpaid invoices)
  - closed items (paid invoices)
  - aging
★ fully linked to General Ledger; will post to applicable accounts: debits A/R, credits account you specify

PAYROLL

Payroll invoices many complex calculations and the production of reports and documents, many of which are required by government agencies. It is an ideal candidate for the computer. With this Payroll system in-house, you can promptly and accurately pay your employees and generate accruate documents/reports to management, employees, and appropriate government agencies concerning earnings, taxes, and other deductions. The package has been converted to the TRS-80™ and is now a well documented, on-line, interactive micro-computer system with the capabilities of (or exceeding) many larger systems.

CAPABILITIES:

★ performs all necessary payroll tasks including:
  - file maintenance, pay data entry and verification
  - computation of pay and deduction amounts
  - printing of reports and checks
★ can handle salaried and hourly employees
★ employees can receive:
  - hourly or salary wage
  - vacation pay
  - holiday pay
  - piecework pay
  - overtime pay

(Continued on next page)

(PAYROLL CAPABILITIES CONTINUED)

- ★ employees can be paid using any combination of pay types (except, hourly cannot receive salary & salary cannot receive hourly)
- ★ special non-taxable or taxable lump sums can be paid regularly or one time (bonus, reimbursements, etc)
- ★ health & welfare deductions can be automatically calculated for each employee
- ★ earnings-to-date are accumulated and added to permanent records; taxes are computed and deducted: US income tax, Social Security tax, state income tax, other deductions (regular or one time)
- ★ paychecks are printed; computer checks with your company letterhead can be purchased from SBSG
- ★ calculations are accumulated for; employee pay history, 941A report, W-2 report, insurance report, absentee report
- ★ fully linked to General Ledger. Each employee's payroll information can be distributed to as many as (12) twelve different GL accounts; system automatically posts to cash account.

INVENTORY/CONTROL INVOICING

- OVER 1000 ITEMS ON MODEL I
- OVER 3000 ITEMS ON MODEL II
- LOW STOCK ALARM
- INVOICING DEDUCTS FROM INVENTORY
- COMPLETE INVENTORY REPORTS
- REORDER POINT REPORT
- QUICK ITEM ACCESS

CLIENT BILLING, STOCK CONTROL, DENTAL BILLING, COMMODITIES
Medicare/Medicaid billing also available

MODEL I **$125 Per Module**
$495 Complete System

MODEL II **$225 Per Module**
$995 Complete System

WE ARE THE ONLY SOFTWARE COMPANY THAT OFFERS A REFUND WITHIN 30 DAYS ON ALL SOFTWARE (H & E COMPUTRONICS MONTHLY NEWSMAGAZINE SUBSCRIBERS ONLY). WE DO CHARGE A $3 PENALTY TO COVER POSTAGE AND HANDLING.

GENERAL LEDGER

The General Ledger accounting system consolidates financial data from other accounting subsystems (A/R, A/P, Payroll, direct posting) in an accurate and timely manner. Major reports include the Income Statement and Balance Sheet and a "special" report designed by management. The beauty of this General Ledger system is that it is completely user formatted. You "customize" the account numbers, descriptions, and report formats to suit your particular business requirements. These programs were developed 5 years ago for the Wang micro-computer and have been tested in many environments since then. The package has been converted to the TRS-80™ and is now a well documented, on-line, interactive micro-computer system with the capabilities of (or exceeding) many larger systems.

CAPABILITIES

- ★ more than 200 chart of accounts can be handled
- ★ account number structure is user defined and controlled
- ★ more than 1,750 transactions may be entered via:
  - direct posting; done by hand; validated against the account file before acceptance
  - external posting; generated by A/R, A/P, Payroll or any other user source
- ★ data is maintained and reported by:
  - month
  - quarter
  - year
  - previous three quarters
- ★ reports (samples on back) include:
  - trial balances
  - income statement
  - balance sheet
  - special accounts reports and more . . . .
- ★ user formats reports with the following designed as you wish:
  - titles
  - headings
  - account numbers
  - descriptions
  - subtotals
  - totals
  - skip lines
  - skip pages
- ★ up to eight levels of totals - fully user designated
- ★ menu driven; easy to use; full screen prompting and cursor control

COMPUTRONICS MATHEMATICAL APPLICATIONS SERVICE ✓9

Box 149 New City, New York 10956

24 HOUR ORDER LINE
(914) 425-1535

PLEASE SEND ME:

MODEL I $125 PER MODULE _____
$495 COMPLETE SYSTEM _____

MODEL II $225 PER MODULE _____
$995 COMPLETE SYSTEM _____

CREDIT CARD NUMBER _____ EXP. DATE _____

SIGNATURE _____

NAME _____

ADDRESS _____ STATE _____ ZIP _____

*** ADD $6/YEAR (CANADA, MEXICO) - ADD $12/YEAR AIR MAIL - OUTSIDE OF U.S.A., CANADA & MEXICO ***

✓Reader Service—see page 162

Fit an external fuse to your power supply.

Fuse Fix

William P. Winter Jr.
O'Higgins 3168
1429 Buenos Aires
Argentina

Having just purchased a TRS-80 keyboard/CPU, adding a TV monitor and cassette recorder, I had the system up and running, when—poof!—a fuse blew.




Fig. 1. Original PC Board.

Off went the TRS-80.

To get to the fuse I cut open the plastic power supply case (badly designed by Radio Shack). The fuse, soldered to the printed circuit board, has pigtails. I soldered leads to a similar fuse and then turned on the TRS-80 again. (Radio Shack had incorrectly installed fast blow fuses, instead of the required slow blow, in a production run.)

Everything worked fine for a half hour or so and then off it went.

During the next few days the story repeated itself, and each time the fuse went, so did whatever program I was working on.

Change Your Fuse

I knew the fuse was there to protect the expensive chips and that the TRS-80 designers probably wanted to keep inexperienced users from installing too heavy a fuse. However, it was also impractical to send the unit to a service center every half hour from Argentina.

If you have similar trouble you can remedy the situation by following these steps:

1. Remove the fuse and solder a jumper wire in its place.
2. Remove the line cord lead from the printed circuit board and insert an in-line fuse holder in series with the line cord lead just removed. Cut one lead of the fuse holder long enough to pass through the opening at the base of the supply and solder this lead to the hole previously occupied by the line cord lead.




Fig. 2. Modified PC Board.

You can now solder the other fuse holder lead to the line cord, or do as I did and solder the line cord directly to the contact inside the fuse holder. This requires more work but makes for a much neater job.

3. Replace the fuse with a slow blow fuse of the same current rating.
4. You can now glue the case back together. Use the special plastic cement available at toy and hobby shops.

Since performing this minor surgery, I haven't blown a single fuse.■

MICROPHASE SYSTEMS
Announces
WORDSCRIBE for TRS-80's

Let **WORDSCRIBE** transform your Model I or Model II TRS-80 into a high quality word processing system.

WORDSCRIBE features include: full screen editing, margin justification, line insertion, line deletion, block move, block copy, find, change, and much much more.

Model II $149.95
req. 1 disk, 64k mem.
Model I disk version .....$ 99.95
req. 1 disk, 48k mem.
Documentation only .....$ 9.95
(can be applied to later purchase)

STOCK MARKET DATA TAPES for TRS-80 Model I !!

Each tape cassette contains one months data for the NYSE or AMEX stock of your choice. Data includes daily high, low, close, and volume information. Can be read by any Level II Basic program with simple input statements. Available for Jan. 1979 to present. Please specify month and stock name.

one months data .....$ 5.95
charting program $49.95
(plots high, low, close and 2 moving avgs.)

MicroPhase Systems
11223 E. 45 St. So. #314 ✓123
Tulsa, Ok. 74145

DISASSEMBLED HANDBOOK FOR TRS-80
VOLUME 1—$10. POSTPAID
Using ROM Calls in assembly language programming
Self-programmed learning course—10 Chapters
All BASIC ROM Calls—ROM ancillary functions
CINT, CSNG & CDBL arith/trig/log/etc. demo pgms
VOLUME 2—$15. POSTPAID
Advanced assembly language course—13 Chapters
Storing video in MEM for later use & recall
Split-screen video with scroll/store/recall
Decoding single & double precision numbers
COMMENTS
COMPUTER INFORMATION EXCHANGE—ship 100 Vol. 2
George Blank—Vol. 1 good intro. to ROM CALLs
SOFTSIDE—will reprint 3000 copies of Vol. 1
Alan Moluff—I especially recommend this book
S-80 BULLETIN—A must for every 80 bookshelf
Charles Butler—most informative and accurate
INTERFACE—save you 1 year's assy. lang. study
Joni Kosloski—we sold over 500 first 30 days
THE ALTERNATE SOURCE—std. text for using ROM
Miller Microcomputing—ship us a carton ASAP
CHICATRUG—ship us another carton via Air Mail
Bill McLaughlin—ship another 300 air freight
RICHCRAFT ENGINEERING LTD. ✓276
Drawer 1065, Wahmeda Industrial Park
Chautauqua, New York 14722
phone (716) 753-2654 for COD orders

accounts receivable

This program was developed for our family business. The goal was an orderly transition from hand-kept books to computerized bookkeeping. Accounts receivable including sales tax was the most time consuming, thus the beginning. Time spent on accounts receivable has been cut in half. More detailed statements sent earlier have decreased the outstanding receivables.

This program is designed for business people, not computer or accounting experts. All inputs are structured for fast and efficient operation. If a math check is required, extensions and totals are checked faster than with a calculator. If a math check is not required, only the amount of sale, less any tax, is entered. The program stores sales tax information on all customers and will display the proper tax, if any is required. Non-taxable customers making a taxable purchase, customers from a tax district other than the place of business, picking up at the place of business are easily handled by the program. Amount of tax and taxable sales are compiled and stored for up to 100 sales tax districts.

Every entry can be edited at any time. If an incorrect or missing transaction is found after statements are printed, the corrections can be made and the statement reprinted. Sales tax and monthly data in disk files are adjusted by this process.

Rate of service charge and customers to receive service charge are selected by the user.

Overview and Sample Reports.....$5.00
Documentation.....$25.00
Program Disk & Documentation.....$300.00

solutions 80
✓277 Route 55
La Grangeville, New York 12540

America's Largest Mail-Order Computer Store

HOBBYWORLD® ELECTRONICS, INC.

↙23

Call Toll-Free: USA (800) 423-5387
In Calif: (800) 382-3651
Local & Outside USA:
(213) 886-9200

BETTER BUSINESS BUREAU MEMBER




Backgammon Challenger $109.95

You will be challenged and intrigued by this game. Uses all strategies of the game, including a running game, hit and run, blocking and bear off games. YOU handle the dice! Choose offense or defense. Computer responses vary every game. Weight 3 lbs.
Cat No. 2411

Chess Challenger "7" Chess "VOICE" Challenger

If you're into chess you will love Chess Challenger! 7 levels of play. "Mate in Two" and "Chess by Mail". Like to have your opponent call out the moves? Try "Voice" Chess Challenger. 96,000 Bits of Read Only Memory, and over 8,000 bits of Random Access Memory. Can be used by the blind as the game will audibly call every move, capture, and repeat board position.



Cat No. 2399	**Chess Challenger "7"**	**Wt. 3 lbs.**	**$112.25**
Cat No. 2398	**Chess Voice Challenger**	**Wt. 4 lbs.**	**$336.95**

ATARI® Home Video System

The nation's best selling home video entertainment center is here! Currently supports a library of twenty video game cartridges with over 1300 variations and options. Comes with interchangeable joystick and paddle controllers, special circuits to protect home TV, realistic sound effects and produces crisp, bright colors on your TV screen. Also includes ATARI's "Combat" game with 108 variations and options.

CAT NO.	DESCRIPTION	WT.	PRICE
2375	ATARI Video Computer System	8 lb.	$179.95
2206	Driving Controller-Pair	2 lb.	$ 19.95
2207	Paddle Controller-Pair	2 lb.	$ 19.95
2208	Joystick Controller-Pair	2 lb.	$ 19.95

ATARI Game Cartridges

CAT NO.	DESCRIPTION	WT.	PRICE	CAT NO.	DESCRIPTION	WT.	PRICE
2376	Starship	6 oz.	$15.95	2390	Bowling	6 oz.	$19.95
2377	Black Jack	6 oz.	$15.95	2391	Skydiver	6 oz.	$19.95
2378	Space War	6 oz.	$15.95	2392	Fun With Numbers	6 oz.	$19.95
2379	Surround	6 oz.	$15.95	2393	Brain Game	6 oz.	$19.95
2380	Slot Machine	6 oz.	$15.95	2394	Superman	6 oz.	$26.95
2381	Outlaw	6 oz.	$17.95	2395	Casino	6 oz.	$26.95
2382	Slot Racer	6 oz.	$17.95	2396	Backgammon	6 oz.	$44.95
2383	Video Olympics	6 oz.	$17.95	2397	Video Chess	6 oz.	$44.95
2384	Breakout	6 oz.	$17.95				
2385	Canyon Bomber	6 oz.	$19.95				
2386	Street Racer	6 oz.	$19.95				
2387	Homerun	6 oz.	$19.95				
2388	Basketball	6 oz.	$19.95				
2389	Football	6 oz.	$19.95				

NOTE: Not for use with ATARI Programmable Computers

TRS-80/APPLE/EXIDY 16K Memory Add-On Kit $88.00

Everything needed to upgrade your TRS-80, Apple or Exidy! An additional 16K includes illustrated instructions, RAMS and preprogrammed jumpers. No Special tools required. Wt. 4 oz.

CAT NO.	DESCRIPTION
1156	TRS-80 Keyboard Unit
1156-A	TRS-80 Exp. Interface (prior to 4/1/79)
1156-B	TRS-80 Exp. Interface (after 4/1/79)
1156-C	for APPLE II
1156-D	for EXIDY

STAR TREK III

One of the most advanced Star Trek games ever. Locate the 5 Class M Planets, battle Klingons, but watch out for black holes and pulsars. This version is 3 dimensional, not flat like other versions. Watch the Enterprise phasers hit and explode the Klingons! Extensive use of graphics throughout. At the end, return to Star Fleet command, where the data in the ships computer evaluates and rates your performance. Takes about 2 hours to play a game.
Cat No. 1041 TRS-80 level II/16K $14.95

ADVENTURE

Explore an almost endless maze of treasures and pitfalls. Challenging and fun!
TRS-80 L1/L2 16k
Cat No. 1723 $14.95

BARRICADE


Similar to breakout. A real time game, with options of speed balls, angle, etc.
TRS-80 L1/L2 16k
Cat No. 1362 $14.95

SARGON II

Hayden
The champ of champs! Surpasses Microchess, and even Sargon I! Offers complex moves, 7 levels of play, activity indicator, a special "hint" mode, plus more! The best chess program ever!

Cat No. 2082	**TRS-80**	**$29.95**
Cat No. 2083	**Apple II**	**$29.95**

NOVATION "CAT" ACOUSTIC MODEM



The FIRST compact modem designed for the small computer user. Transmits data over standard telephone lines . . Exchange data or programs with other systems. Data transfer rate up to 30 char/sec. Complete and ready to use. Requires 110 VAC, 60 Hz.
Cat No. 1480 **Weight 3 lbs.** **Price: $189.00**

MATCHLESS MS-80 TRS-80 MINI DISK DRIVE



Plugs into the expansion interface. Complete factory tested drive includes installation instructions and software listing to access 3 times faster than Radio Shack drives. 40 tracks instead of 35. Existing 35 track software completely compatable.

Cat No.	Description	Weight	Price
1375	MS-80 Disk Drive	8 lbs.	$395.00
2964	2 Drive Cable	8 oz.	$ 19.95
1396	4 Drive Cable	8 oz.	$ 39.95
1938	Accessing Software, tracks 36-40	4 oz.	$ 10.00
1485 D	MS-80 MPI 51 Manual	2 oz.	$ 1.50
1147	Verbatim Diskettes, (box of 10)	8 oz.	$ 33.00

VERBATIM 5¼" DISKETTES

10 per box

CAT NO.	TYPE	DESCRIPTION	PRICE
1147	525-01	soft sector, TRS-80, Etc.	$33.00
1148	525-10	10 hole, hard, Apple, North star	$33.00
1149	525-16	16 hole, hard, micropolis	$33.00
2330	577-01	soft sector certified	$49.95
2331	577-10	10 hole, hard, certified	$49.95
2332	577-16	16 hole, hard, certified	$49.95

MICRO SQUARED M2-250 DOUBLE SIDED DISK DRIVES



Two "double sided" drives yield 358k Bytes on TRS-80, 875k Bytes on S-100 systems. Fast transfer rate of 250k Bytes/Sec. No modification of hardware or software necessary. Complete with Power Supply and Cabinet. Factory tested. Life Expectancy 20,000 hours, average media life 3 million passes on a single-track. Pertec drives.

Cat No.	Description	Weight	Price
2054	M2-250 Disk Drives	15 lbs.	$1195.00
2329	#550-16 Hard Sector Diskettes	10 oz.	10 Box/$59.95



Page after page of exciting products. Computerized toys and games, personal computers, disk drives, integrated circuits, semi conductors. Add new dimension to your Apple, Atari, TRS-80, etc. with our special application boards and comprehensive software library. Hundreds of products available at terrific Hobbyworld prices. Circle our reader service number or write/phone for your free illustrated flyer today.

TRS-80 To S-100 BUS ADAPTOR-MINI 8100

Mini size, mini price, but maxi-performance. Available with adaptor circuitry and four slot shielded motherboard for direct S-100 use, or with adaptor on S-100 card to plug into external S-100 mainframe. Opens up the vast world of S-100 Bus products to TRS-80 owners. Wt. 3 lb.

Cat No.	Description	Price
1905	Kit w/motherboard, one S-100 Conn.	$115.00
1906	A&T, Motherboard, 4 S-100 Conn.	$155.00
1907	kit, plugs into S-100 mainframe	$ 95.00
1908	A&T, plugs into S-100 mainframe	$125.00

TRS-80 Lower Case Modification Kit

Modifies your machine to display both upper and lower case. Installs in minutes! Requires drill, soldering iron and screw-driver. With complete instructions.
Cat No. 1550 $19.00

TRS-80 is a registered trademark of the Tandy Company.

HOW TO ORDER

Pay by check, Mastercharge, Visa, or C.O.D. Charge card orders please include expiration date. Payment in U.S. dollars only. Order by phone, mail or at our retail store. MINIMUM ORDER $10.00. Please include phone number and magazine issue you are ordering from. Prices valid thru last day of cover date. SHIPPING: USA: Add $2.00 for first 2 lbs., 35¢ each addt'l lb. for ground. For AIR add $3.00 first 2 lbs., 75¢ each addt'l lb. FOREIGN: surface: $3.00 first 2 lbs., 60¢ each addt'l lb. AIR: $11.00 first 2 lbs., $5.00 each addt'l lb. CODs: add $1.25 addt'l. Not responsible for typographical errors. Some items subject to prior sale or quantity limitations. 120 day guaranteed satisfaction. Exception: partially assembled kits.

19511 Business Center Drive Dept. V6 Northridge, Ca. 91324

↙Reader Service—see page 162

Scanned by Ira Goldklang - www.trs-80.com

. . . We have them ALL

All the Disks and Printers that interface to the TRS-80®

5¼" Drives — 8" Drives — Single and Double Density — and Hard Disk Systems with up to 40 megabytes!

TRS-80 Disk Drive

SAVE OVER $100

Vista, Percom, Lobo, and others

Fully compatible with expansion interface and TRSDOS Software

Some as Low as

$359

CP/M® OPERATING SYSTEM
for Mod. I List $145. . . . . $129
for Mod. II List $170. . . . . $149
Complete line of CP/M Software available at discount prices.

CENTRONICS PRINTERS

NEW 730
w/friction and tractor




$679 †

737 parallel, friction, tractor, List $995 . . . $849
779-1 (TRS-80 Line Prtr. 1), List $1245 949*
779-2 with tractor, List $1350 . . . . . 1049*
702-2 120 cps, bi-directional, tractor, VFU 1995
703-2 185 cps, bi-directional, tractor, VFU 2395
(shipped freight collect)


ANADEX

80-COL. DOT MATRIX PRINTER

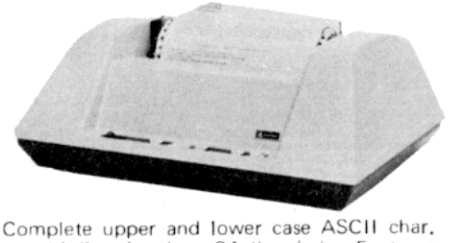

Complete upper and lower case ASCII char. set, bi-directional at 84 lines/min. Features RS232 20/60 mil current loop and Centronix parallel interface. Ideal for use with TRS-80, Sorcerer, Cromemco, and North*Star systems.


OUR PRICE ONLY $749
(shipping $10)



Bi-directional; 150 cps; logic seeking; adjustable tractor. Available with lower case compressed print; forms length control or vertical forms control option. Centronics style parallel interface also available.

T.I. 810 with serial/parallel interface
List 1940 . . . . OUR PRICE $1735
T.I. 810 printer outperforms Line Printer III.

PAPER TIGER®

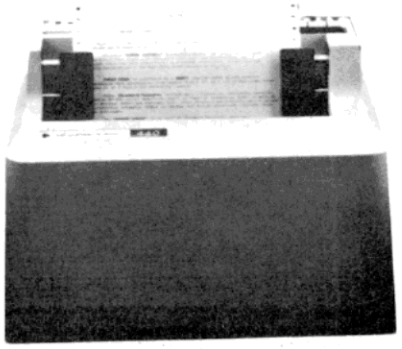

Paper Tiger, List $995 ONLY $895
w/graphics options, incl. buffer, $1194 . . . $989
IP-225 w/1210, 1250 options, List $984 834
IP-225 w/tractor, 1210*, 2K buffer, & graphics options, List $1098 899
TRS-80 cable 45
*1210 option is expanded/compressed print.

NEC SPINWRITER™



The Fantastic Letter-Quality Printer at 55 cps

— CALL FOR PRICES —

Printers for TRS-80 require Level II machines. Printer cables extra. Call for price and order number.
* Same as Line Printer I
† Same as Line Printer II

CORVUS 10 megabyte hard disk for Mod. I or II
ONLY $4795

CONVERT YOUR EXISTING SELECTRIC TYPEWRITER TO A PRINTER . . .

Power Supply & electronics, assembled & tested. You make only a simple solenoid installation (or have the factory do it). Manufactured by Escon.
Parallel version, List $575 . . . . . ONLY $514
TRS-80 cable (specify MOD I or MOD II) $25

SHIPPING AND INSURANCE: Add $5 for Selectric Converter, $6 for disk drives, $10 for Megabox. Centronics printers shipped freight collect. Contact us for shipping information on other printers.

All prices subject to change and all offers subject to withdrawal without notice. Prices in this ad are for prepaid orders. Slightly higher prices prevail for other-than-prepaid orders, i.e., C.O.D., credit card, etc.

— WRITE FOR FREE CATALOG —

MiniMicroMart, Inc.

1618 James Street, Syracuse, NY 13203 (315) 422-4467 TWX 710-541-0431


master charge THE INTERBANK CARD

VISA

24

TRS-80 SERIAL I/O

• Can input into basic • Can use LLIST and LPRINT to output, or output continuously • RS-232 compatible • Can be used with or without the expansion bus • On board switch selectable baud rates of 110, 150, 300, 600, 1200, 2400, parity or no parity odd or even, 5 to 8 data bits, and 1 or 2 stop bits. D.T.R. line • Requires +5, -12 VDC • Board only $19.95 Part No. 8010, with parts $59.95 Part No. 8010A, assembled $79.95 Part No. 8010 C. No connectors provided, see below.



EIA/RS-232 connector Part No. DB25P $6.00. with 9', 8 conductor cable $10.95 Part No. DB25P9.



3' ribbon cable with attached connectors to fit TRS-80 and our serial board $19.95 Part No. 3CAB40.



GAME PADDLES & SOUND



Includes: 2 game paddles, interface, software, speaker, power supply, full documentation including: schematics, theory of operation, and user guide; plus 2 games on cassette (Pong and Starship War). $79.95 Complete Part No. 7922C

DIGICOM DATA PRODUCTS INC. Series 312 Acoustic Coupler



300 BAUD Originate, Part No. AC3122, $219.95. 300 BAUD Answer, Part No. AC3122, $219.95. 300 BAUD Answer/Originate, Part No. AC3123, $229.95.

COMPUCRUISE




$129.95; with cruise control $169.95

LIGHT-PEN For Your TRS-80



Your TRS-80 Light-Pen is a carefully engineered instrument and with the proper care will give satisfactory use and many years of service. Part No. TRS80LP $24.95.

THE TELESIS VAR-80 INTERFACE UNIT



For the TRS-80 with Level II Basic • Provides 8 outputs • Floppy controller • Provides 8 inputs • 2 ft. of interconnecting cable w/connector • Plugs directly into TRS-80 • Power supply provided • Assembled and tested. Part No. VAR80, Introductory price $109.95.

SYSTEM EXPANSION from LNW Research

• Serial RS232C/20 mA I/O • Floppy controller • 32K bytes memory • Parallel printer port • Dual cassette port • Real-time clock • Screen printer bus • Onboard power supply • Software compatible • Solder mask, silk screen. PC board and user manual, Part No. LNW80, $69.95.

DISKETTES




Box of 10, 5" $29.95, 8" $39.95. Plastic box, holds 10 diskettes, 5" - $4.50, 8" - $6.50.

16K RAMS

For the Apple, TRS-80 or Pet $8 each Part No. 4116/2117.

LEEDEX MONITOR



12" Black and White • 12 MHz Bandwidth • Handsome Plastic Case • $139.00

S-100 INTERFACE



AN S-100 bus Adapter—Motherboard for the TRS-80. Kit, Part No. HUH81DLXK, $295.95. Assembeled, Part No. HUH81DLXA, $375.95.

NOW! A FULL SUPPORT SYSTEM FOR TRS-80



• 32K of RAM • EPROM firmware • Disk control • Data acquisition • Parallel I/O • Serial I/O • Plug into GPA's Motherboard. GPA's quality design includes • 6-44 pin edge connectors • +5V, -5V, +12V, -12V external power supply required • Active termination. The Motherboard, Part No. GPA80, is only $149.95.

TAKE ADVANTAGE OF GPA-EXPANSION CARDS FOR THE GPA80


Memory cards: Now with Fortran compilers available for your TRS-80, additional expansion memory is a must! Card with sockets only, Part No. GPA801, $119.95. Card with 16K of 4116 Dynamic Ram, Part No. GPA802, $224.95. Card with 32K of 4116 Dynamic Ram, Part No. GPA803, $329.95. All cards come equipped with sockets to accomodate 32K of Ram.

EPROM firmware card. Put those valuable subroutines in firmware. Don't waste time loading and unloading tapes and disks. For 2708 or 2716 EPROMS, Part No. GPA806, $79.95.

Serial I/O card. Here's what you've been asking for, a full serial terminal interface, with RS-232C or 20 mA. Current loop. Input/output capabilities. Part No. GPA807, $79.95.

Parallel I/O Card. Control functions in the outside world, monitor and store real time events. Two parallel output ports. Dip switches select ports (0-254). Part No. GPA808, $79.95.

FLOPPY DISK STORAGE BINDER




Three-ring binder comes with ten transparent plastic sleeves which accommodate either twenty, five-inch or ten, eight-inch floppy disks. Binder & 10 holders $14.95 Part No. 8800; Extra holders 95¢ each. Part No. 800.

DIGITAL CASSETTE



5 min. each side. Box of 10 $9.95. Part No. C-5.

DISK JACKET™



Holds two 5-1/4 inch diskettes and will fit any standard three ring binder. $9.95/10 Pack.

TRENDCOM PRINTER




• 40 characters per second • 4-7/16 inch wide thermal paper • Graphics (TRENDCOM 100): 480 sevendot print postions per line. TRENDCOM 100, Part No. TRC0100, $495.95. TRENDCOM 200, Part No. TRC0200, $375.95. **Interface** for TRS-80, Part No. T80A $45.95. For Apple II, Part No. TRCAII, $75.95. For PET, NO. TRCP2, $79.95. For Scoccerer, TRCSR1 $45.95.

SARGON: A Computer Chess Program

Features the complete program that won the 1978 West Coast Computer Faire Tournament. Part No. 00603 — TRS-80 Level II; Part No. 00604 — Apple II (24K). $19.95

SOUND EFFECTS AND MUSIC FOR YOUR COMPUTER




SOUNDWARE is a complete system. It includes a speaker/amplifier unit with volume control, earphone jack, and connectors. It boasts excellent tone quality yet is small and convenient to use. Add batteries, plug it in, and play. One year warranty. SOUNDWARE package (includes INTRO to SOUNDWARE programs) PET (8K), Part No. 20003, $29.95. TRS-80 Level II (16K), Part No. 20002, $29.95. Compucolor II (8K), Part No. 20001, $39.95. INTRO to SOUNDWARE programs only PET and TRS-80, Part No. 20005, $14.95. Compucolor II Part No. 20006, $19.95.

To Order: Mention part no. description, and price. In USA shipping paid by us for orders accompanied by check or money order. We accept C.O.D. orders in the U.S. only, or a VISA or Master Charge no., expiration date, signature, phone no., shipping charges will be added. CA residents add 6.5% for tax. Outside USA add 10% for air mail postage and handling. Payment must be in U.S. dollars. Dealer inquiries invited. 24 hour order line (408) 448-0800

Send for FREE Catalog . . . a big self-addressed envelope with 41¢ postage gets it fastest!

ELECTRONIC SYSTEMS Dept. 80 P. O. Box 21638, San Jose, CA USA 95151

If you enjoy driving, you're going to get a COMPUCRUISE. Once you see what it can do, you just won't be able to live without it.

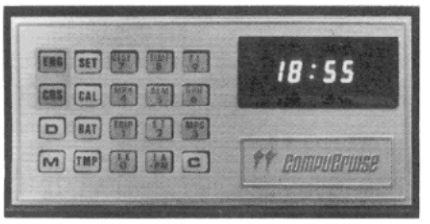

This gadget fits into most dashboards . . . no strain even in a tiny sports car like the Mazda RX-7 . . . and once you have it, every trip is like flying a 747. The darned thing tells you the time, how fast you're going, how far you've been on this trip or since the last regassing, how many miles per gallon you're getting, either at the instant or the average on the trip . . . or gallons per hour at the moment or for the trip . . . temperature outside . . . inside (or coolant temperature, if you prefer) . . . oh, it has an elapsed time for the trip, a stop watch, lap time, an alarm . . . how much further for your trip, how many gallons more the trip will take, how much longer for the trip at your present average speed . . . yes, it gives you your average speed for the trip. You prefer it in metric, no strain . . . liters remaining, etc. Did we mention that it also has cruise control either at a speed set on the control board or at whatever speed you are traveling? The Compucruise will keep you busy and entertained during any trip . . . telling you more than you will ever want to know.

The Compucruise is not difficult to install . . . though it does connect to everything except the cigarette lighter. Until you've tried computerized travel, you haven't found out how much fun driving can be. It will work on any car not having fuel injection . . . and there is a front-wheel drive accessory gadget available for only $4.40-#P001 (regularly $5.50).


The price for the Compucruise is regularly $199.95 . . . and a bargain at that price. We'll sell you one of these fantastic gadgets for $159.95 with cruise control (Model 44-#P002), and $127.95 without (Model 41-#P003).Send money . . . and start having fun!

MOM'S

MAIL ORDER MICROS

✓158

Dept. 680 • PO Box 427 • Marlboro NH 03455
Phone: (603) 924-3041 *



Steal Stopper

Ever had your car stolen?
The first reaction is one of disbelief . . .
. . . you *know* it was *right there*!

What you want is a modern combination lock on your ignition . . . The Steal Stopper. It's easy to install and almost impossible to defeat. *You* can by-pass it, if you want, for parking attendants or a car wash. Other than that, you set up a secret four digit code and only you will then be able to start the car . . . even if you have the keys in
the ignition.

This protection retails for $50 . . . but we have a special for you at $39.95. Don't procrastinate. Order # P004.

Note: This product works best on Detroit cars. Mazda RX7 owners must order additional module, # P008, which costs $8. The Steal Stopper can be modified for Mercedes, Porsche, Ferrari, or other high performance European cars by returning unit to manufacturer with $3. They promise quick modification and return.

SPECIAL 10% OFF REGULAR PRICES

#1 ADVENTURELAND
YOU'LL WANDER THROUGH AN ENCHANTED LAND ENCOUNTERING WILD ANIMALS AND MAGICAL BEINGS WHILE YOU TRY TO RECOVER LOST TREASURES.
Order #SA001T for TRS Level II 16K, #SA001S for Sorcerer 16K, #SA001A for Apple 24K—$13.45 each, on cassette.

#2 PIRATE ADVENTURE
SAIL TO TREASURE ISLAND AND TRY TO RECOVER LONG JOHN SILVER'S LOST TREASURES.
Order #SA002T for TRS Level II 16K, #SA002S for Sorcerer 16K, #SA002A for Apple 24K—$13.45 each, on cassette.

#3 MISSION IMPOSSIBLE ADVENTURE
SAVE THE WORLD'S FIRST AUTOMATED NUCLEAR REACTOR WHEN YOU COMPLETE YOUR MISSION.
Order #SA003T for TRS Level II 16K, #SA003S for Sorcerer 16K, #SA003A for Apple 24K—$13.45 each, on cassette.

#4 VOODOO CASTLE
SAVE COUNT CRISTO FROM THE FIENDISH CURSE OR FOREVER BE DOOMED—BEWARE THE VOODOO MAN.
Order #SA004T for TRS Level II 16K, #SA004S for Sorcerer 16K, #SA004A for Apple 24K—$13.45 each, on cassette.

#5 THE COUNT
LOVE AT FIRST BYTE FROM YOUR BIG BRASS BED IN TRANSYLVANIA.
Order #SA005T for TRS Level II 16K, #SA005S for Sorcerer 16K, #SA005A for Apple 24K—$13.45 each, on cassette.

#6 STRANGE ODYSSEY
YOU RE MAROONED AT THE GALAXY'S EDGE AND DISCOVER RUINS OF AN ANCIENT ALIEN CIVILIZATION AND TRY TO COPE WITH UNEARTHLY TECHNOLOGIES WHILE YOU AMASS FABULOUS TREASURES.
Order #SA006T for TRS Level II 16K, #SA006S for Sorcerer 16K, #SA006A for Apple 24K—$13.45 each, on cassette.

#7 MYSTERY FUN HOUSE
FIND YOUR WAY THROUGH THE STRANGEST FUN HOUSE BEFORE THE WEIRD PARK CLOSES.
Order #SA007T for TRS Level II 16K, #SA007S for Sorcerer 16K, SA007A for Apple 24K—$13.45 each, on cassette.

#8 PYRAMID OF DOOM
AN EGYPTIAN TREASURE HUNT THROUGH A NEWLY UNCOVERED PYRAMID. COMPLETE WITH ANCIENT CURSE.
Order #SA008T for TRS Level II 16K, #SA008S for Sorcerer 16K, #SA008A for Apple 24K—$13.45 each, on cassette.

BRAND NEW* TRS-80
and accessories at FANTASTIC SAVINGS

LEVEL II 16K COMPLETE	$720	#TRS-001S
16K EXPANSION UNIT	$400	#TRS-002S
32K EXPANSION UNIT	$525	#TRS-003
DISK DRIVES	$425 each (Specify which drive you want)	#TRS-004
FRICTION MODEL PRINTER	$870	#TRS-005S
TRACTOR FED MODEL PRINTER	$1350	#TRS-006
LINE PRINTER III (AND CABLE)	$1550	#TRS-007
MOD II 64K	$3400	#TRS-008

TERMS: Shipment normally within one week of receipt of your order (with cashier's check, money order, or credit card) for microcomputer and three weeks for accessories (checks take two weeks extra to clear bank). ADD $2.50 PER ITEM for HANDLING. Everything will be sent to you with UPS freight charges COLLECT.

**NOT UPGRADED USED OR RECONDITIONED LEVEL I's WITH OLD KEYBOARDS BUT BRAND SPANKING NEW TRS-80's IN FACTORY CARTONS WITH FULL FACTORY WARRANTY! COMPARE PRICES AND QUALITY AND ORDER FROM MOM's.*

CASIO'S NEW C-80 CALCULATOR CHRONOGRAPH



has lightweight attractive ruggedly built black plastic water-tight case and band, regular digital watch features of hours, minutes, seconds, AM/PM and day on display PLUS two time zones, calendar and a 4 function calculator! You've seen it advertised in the Wall Street Journal for $75 . . . MOM's price is only $69.95. Hurry, our supply is limited . . . order #PC80 now.

ASK MOM

For details of October 1980 Asian and European Electronics Tours. See January Wayne Green editorials in Kilobaud Microcomputing and 73 Magazine. Info #002 . . . No charge.

HONEYWELL

15 **Honeywell ASR-33 Communications Consoles** with TTY, paper tape reader and punch. Used, working when removed from service. Shipped freight collect or you pick up. Weight 300 lbs. $395. Order #P006.

INSTANT SOFTWARE
HALF PRICE SPECIAL
CLOSEOUT—ONLY $4

TRS-80, Level I, Games
Knights Quest/Robot Chase 4K-#ISI0003.
Cave Exploring 16K-#ISI0010.
Doodles & Display 16K-#ISI0030.
Fun Package I 16K-#ISI0041.

TRS-80, Level I, Finance
Status of Homes 4K-#ISI0012.

TRS-80, Level II, Hobby
Model Rocketry Analyzer-#ISI0024.

MOM'S SALE

MAIL ORDER MICROS ✓158
Dept. 680 • PO Box 427 • Marlboro NH 03455
Phone: (603) 924-3041 ✱



BOOK CLEARANCE
UP TO 50% OFF

Chemistry with a Computer (Educomp-publisher) #BK1010—was $9.95, now $5.00.
Computer Dictionary (Camelot-publisher) #BK1018—was $5.95, now $3.00.
FORTRAN Programming (Camelot-publisher) #BK1019—was $7.95, now $4.00.
FORTRAN Workbook (Camelot-publisher) #BK1020—was $4.95, now $2.50.
A Quick Look at BASIC (Camelot-publisher) #BK1043—was $4.95, now $2.50.
How to Buy and Use Minis and Micros (Sams-publisher) #BK1025—was $9.95, now $5.00.
How to Program Microcomputers Sams-publisher) #BK1027—was $8.95, now $4.50.
Your Own Computer (Sams-publisher) #BK1072—was $1.95, now $1.00.
8080A Bugbook (Sams-publisher) #BK1103—was $9.95, now $5.00.
Periodical Guide 1976 (Berg-publisher) #BK1041—was $3.00, now $1.50.
Periodical Guide 1977 (Berg-publisher) #BK1042—was $3.00, now $1.50.
Underground Buying Guide (PMS-King-publisher) #BK1067—was $5.95, now $3.00.
Understanding Microcomputers (Scelbi-publisher) #BK1079—was $8.30, now $4.00
Compulator (TAB-publisher) #BK1012-was $7.95, now $4.
The Story of Computers (Camelot-publisher) #BK1056-was $4.95, now $2.50.
Fun with Computers and BASIC (Camelot-publisher) #BK1021-was $6.95, now $3.50.
Introduction to Microprocessors (Microlog-publisher) #BK1032-was $17.50, now $8.75.
Microcomputer Dictionary (Matrix-publisher) #BK1034-was $15.95, now $8.
Microcomputer Primer (Sams-publisher) #BK1035-was $7.95, now $4.
Home Computers Questions and Answers, Hardware. (Dilithium Publishers) was $7.95 now $4.00 #BK1023.



SIMULATED SURVEILLANCE VIDEO SYSTEMS

Since the video camera systems are totally psychological, that is, the visibility and suggestion of video cameras is what deters the thief's desire to steal, all that is really needed is a device that appears to be a functioning video camera. The SSV System provides the businessman with the same deterrent to crime as real systems at a fraction of the cost, because the cameras and alarm boxes are empty of electronics, but would-be crooks don't know this, and SSV Systems are extremely realistic in detail. Some scan back and forth and all have red neon lights. They feature easy installation, mount on any wall, have metal construction throughout, with wrinkle finish paint, all aluminum lens barrel with f-stops, footage markings, and convex optics, simulated coaxial cable and wall plate, manufacturer's unconditional guarantee, plus warning stickers included with all orders.

SVS 900 Scanning camera features 155 degree scanning action, long-life quiet, 1 rpm motor, only $100 (regularly $119.95) catalog # P0010. SVS-880 stationary camera is adjustable to any angle for fixed view coverage with mounting brackets and hardware, only $50 (regularly $58.95) catalog # P0011; or go first class with the SVS-2000, which has a soft blue finish with satin mylar trim only $105 (regularly $124.95) catalog # P0012, the stationary version is only $55 (regularly $62.95) catalog # P0013. Alarm boxes are only $20 (regularly $24.95) catalog # P0014 and complete your look of having real surveillance equipment installed at your business, home or office.

HEAD ALIGNMENT KIT

Best cassette recorder tape head alignment kit available. Solves loading problems. #K001-only $9.95.

PANASONIC
TAPE DECKS

Panasonic RS261 US Stereo Cassette Decks—with auto-stop, record level adjust, VU meters, used condition; all have had heads replaced and aligned. #T001-$50.
Panasonic RS260 US Stereo Cassette Decks—same as above, but also has bias switch for chrome tapes. #T002-$50





VERBATIM MINI DISKS

For TRS-80, Pet, Apple
(Please specify which)
10 PACK—ONLY $24.50
#P007 MOM's offers the Best for Less . . . Again!

MAGIC LIGHT BULB SAVER

If you've got a light bulb you need our MAGIC L.B.S. which increases the life expectancy of a new bulb 33 times! . . . and saves you 44% on energy costs. Regularly $2.50 . . . MOM's price is $1.99 each. #LS001.



MOM'S SOFTWARE
SPEED READING COURSE

Could be the most important program you'll ever buy.

A tachistoscope simulation which enables the user to increase reading and comprehension speeds. A must for any TRS-80 16K Level II owner. Only $5 per cassette. Order #R2001.

Qty	Catalog #	Description	Unit Price	Total

SPECIAL PRICE includes more than 20% discount. ✱ indicates extra price reduction since last ad.
Quantities are limited, immediate refund if ordered item is no longer available.

TERMS: FOB Marlboro, NH USA. Limited stock; everything guaranteed as described; you pay postage on returns. PRINT orders clearly. Minimum order $10 plus $2.50 shipping and handling charge in USA only. DOUBLE THAT ELSEWHERE. Orders over $50 add 5% for shipping in Continental USA; 10% elsewhere. (We will refund excess.) Orders shipped UPS or insured mail only. No COD's please. Send US funds by check or money order. For credit card purchases, add 4%, list AE, MC or VISA, number, and expiration date. Mail to MOM's, Department 680, PO Box 427, Marlboro NH 03455.

Condition of Inventory:
New = original container
Excellent = new, but not in original container
Good = tested or used in store

✱ Phone answered by machine. Orders taken with credit cards. Questions answered by mail. Please leave your name and address.

Delivery: 3 to 6 weeks. Personal checks take about 2 weeks to clear bank before we ship.
Enclosed $ _____

Bill: ☐ AE ☐ MC ☐ VISA

MAIL ORDER MICROS ✓158
Dept. 680 • PO Box 427 • Marlboro NH 03455
Phone: (603) 924-3041

Shipping & Handling _____
Credit Card (+4%) _____
Total _____

Card no. _____ Exp Date _____

Name _____

Address _____

City _____ State _____ Zip _____

Ship: ☐ UPS ☐ Insured mail Signature _____

✓Reader Service—see page 162

80 microcomputing T.M. bookshelf

NEW ADDITIONS



● **PROGRAMMING THE Z-80** – BK1122 – by Rodnay Zaks. Here is assembly language programming for the Z-80 presented as a progressive, step-by-step course. This book is both an educational text *and* a self-contained reference book, useful to both the beginning and the experienced programmer who wish to learn about the Z-80. Exercises to test the reader are included. $14.95.*

● **Z-80 SOFTWARE GOURMET GUIDE AND COOKBOOK** – BK1045 – by Nat Wadsworth. Scelbi's newest cookbook! This book contains a complete description of the powerful Z-80 instruction set and a wide variety of programming information. Use the author's ingredients including routines, subroutines and short programs, choose a time-tested recipe and start cooking! $14.95.*

● **LEARNING LEVEL II** – BK1175 – by David Lien. Written especially for the TRS-80, this book concentrates on Level II BASIC, exploring every important BASIC language capability. Updates are included for those who have studied the Level I User's Manual. Sections include: how to use the Editor, dual cassette operation, printers and peripheral devices, and the conversion of Level I programs to Level II. $15.95.*

● **BASIC BASIC (2ND EDITION)** – BK1026 – by James S. Coan. This is a textbook which incorporates the learning of computer programming using the BASIC language with the teaching of mathematics. Over 100 sample programs illustrate the techniques of the BASIC language and every section is followed by practical problems. This second edition covers character string handling and the use of data files. $9.45.*

● **TRS-80 DISK AND OTHER MYSTERIES** – BK1181 – by Harvard C. Pennington. This is the definitive work on the TRS-80 disk system. It is full of detailed "How to" information with examples, samples and in-depth explanations suitable for beginners and professionals alike. The recovery of one lost file is worth the price alone. $22.50.*



● **Z-80 ASSEMBLY LANGUAGE PROGRAMMING** – BK1177 – by Lance A. Leventhal. This book thoroughly covers the Z-80 instruction set, abounding in simple programming examples which illustrate software development concepts and actual assembly language usage. Features include Z-80 I/O devices and interfacing methods, assembler conventions, and comparisons with 8080A/8085 instruction sets and interrupt structure. $12.50.*

● **INTRODUCTION TO TRS-80 GRAPHICS** – BK1180 – by Don Inman. Dissatisfied with your Level I or Level II manual's coverage of graphics capabilities? This well-structured book (suitable for classroom use) is ideal for those who want to use all the graphics capabilities built into the TRS-80. A tutorial method is used with many demonstrations. It is based on the Level I, but all material is suitable for Level II use. $8.95.*

● **THE INCREDIBLE SECRET MONEY MACHINE** – BK1178 – by Don Lancaster. A different kind of "cookbook" from Don Lancaster. Want to slash taxes? Get free vacations? Win at investments? Make money from something that you *like* to do? You'll find this book essential to give you the key insider details of what is really involved in starting up your own money machine. $5.95.*

● **FREELANCE SOFTWARE PUBLISHING** – BK1179 – by B. J. Korites. "This book is about money and how to make it by writing and selling computer programs," (author's foreword). If you have the skills to write a saleable program, you now need to acquire the skills to sell that program. This compact book comprehensively covers the entire publishing process and many aspects of software salesmanship. $14.95.*

*Use the order card in the back of this magazine or itemize your order on a separate piece of paper and mail to 80 Microcomputing Bookshelf • Peterborough NH 03458. Be sure to include check or detailed credit card information. No C.O.D. orders accepted. All above add $1.00 handling. Please allow 4–6 weeks for delivery. Questions regarding your order? Please write Customer Service at the above address.

FOR TOLL FREE ORDERING CALL 1-800-258-5473

80 microcomputing T.M. bookshelf



● **THE BASIC HANDBOOK** – BK1174 – by David Lien. This book is unique. It is a virtual ENCYCLOPEDIA of BASIC. While not favoring one computer over another, it explains over 250 BASIC words, how to use them and alternate strategies. If a computer does not possess the capabilities of a needed or specified word, there are often ways to accomplish the same function by using another word or combination of words. That's where the HANDBOOK comes in. It helps you get the most from your computer, be it a "bottom-of-the-line" micro or an oversized monster. $14.95.*

● **ADVANCED BASIC** – BK1000 – Applications and problems by James Coan is for those who want to extend their expertise with BASIC. Offers advanced techniques and applications. $9.65.*

● **PIMS: PERSONAL INFORMATION MANAGEMENT SYSTEM** – BK1009 – Learn how to unleash the power of a personal computer for your own benefit in this ready-to-use data-base management program. $9.95.*

● **PAYROLL WITH COST ACCOUNTING – IN BASIC** – BK1001 – by L. Poole & M. Borchers, includes program listings with remarks, descriptions, discussions of the principle behind each program, file layouts, and a complete user's manual with step-by-step instructions, flowcharts, and simple reports and CRT displays. Payroll and cost accounting features include separate payrolls for up to 10 companies, time-tested interactive data entry, easy correction of data entry errors, job costing (labor of distribution), check printing with full deduction and pay detail, and 16 different printed reports, including W-2 and 941. $20.00.*

● **LOW-COST, PERSONAL COMPUTER-BASED INVESTMENT DECISION SYSTEMS** – BK1101 – Use this guidebook by Man-Computer Systems, Inc.'s president, Jerry Felsen, to develop inexpensive personal computer systems that can help you make better investment decisions. $15.00.*

● **HOW TO MAKE MONEY WITH COMPUTERS** – BK1003 – In 10 information-packed chapters, Jerry Felsen describes more than 30 computer-related, money-making, high profit, low capital investment opportunities. $15.00.*



● **SOME COMMON BASIC PROGRAMS** – BK1053 – published by Adam Osborne & Associates, Inc. Perfect for non-technical computerists requiring ready-to-use programs. Business programs, plus miscellaneous programs. Invaluable for the user who is not an experienced programmer. All will operate in the stand-alone mode. $12.50 paperback.*

● **WHAT TO DO AFTER YOU HIT RETURN** – BK1071 – PCC's first book of computer games . . . 48 different computer games you can play in BASIC . . . programs, descriptions, many illustrations. Lunar Landing, Hammurabi, King, Civel 2, Qubic 5, Taxman, Star Trek, Crash, Market, etc. $10.95.*

● **BASIC COMPUTER GAMES** – BK1074 – Okay, so once you get your computer and are running in BASIC, then what? Then you need some programs in BASIC, that's what. This book has 101 games for you from very simple to real buggers. You get the games, a description of the games, the listing to put in your computer and a sample run to show you how they work. Fun. Any one game will be worth more than the price of the book for the fun you and your family will have with it. $7.50.*

● **SIXTY CHALLENGING PROBLEMS WITH BASIC SOLUTIONS (2nd Edition)** – BK1073 – by Donald Spencer, provides the serious student of BASIC programming with interesting problems and solutions. No knowledge of math above algebra required. Includes a number of game programs, as well as programs for financial interest, conversions and numeric manipulations. $6.95.*

*Use the order card in the back of this magazine or itemize your order on a separate piece of paper and mail to 80 Microcomputing Bookshelf • Peterborough NH 03458. Be sure to include check or detailed credit card information. No C.O.D. orders accepted. All above add $1.00 handling. Please allow 4–6 weeks for delivery. Questions regarding your order? Please write Customer Service at the above address.

FOR TOLL FREE ORDERING CALL 1-800-258-5473

PREVIEW

THE BASIC SWITCHYARD


Your TRS-80, given the same set of instructions and data, will always arrive at the same conclusion. A railroad train, given the same track and switch settings, will always arrive at the same destination. Using this as an analogy, we investigate the way BASIC works and follow the interpreter through some programs. All aboard for BASIC, next month in 80.

HOME DISTRIBUTION

If you're involved in one of the many home distributorships, or vending is your business, then this article is a must. With it you can save time and make money! The programs given are designed for use by Amway product distributors, but could be adapted for use by many other businesses.

DATA FILE MANAGEMENT

If you can believe in anything in these days of intensive advertising hype, then believe that if there is any "real power" hidden inside your TRS-80 it's hidden inside the expansion interface – home of the disk controller chip. The use of disks opens up a tremendous "power," to manipulate data.

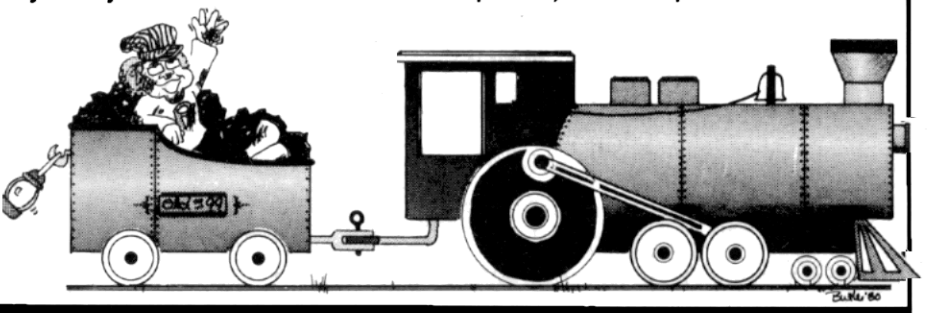

ADVERTISERS

RS Number		Page
81	AB Computers	127
34	Acorn Software Products, Inc.	66
97	Adventure International	75
69	Alpha Byte Storage	97
210	Alpha Products Company	74
124	Alphanetics	93
138	The Alternate Source	139
264	Apparat, Inc.	27
47	Applied Economic Analysis	91
236	Applied Micro Technology	141
122	Bill Archbold	139
146	Audio Video Systems	64
48	Automated Simulations	125
49	Basics and Beyond, Inc.	101
235	The Bottom Line	110
6	The Bottom Shelf, Inc.	37
57	Bourrut Consulting Corp.	109
289	The Business Software Co.	131
166	Business Microproducts	36
298	CPU Shop	99
145	C&S Electronics	107
294	Caldata Systems	114
181	Caldata Systems	36
*	Calsoft	69
195	Cecdat, Inc.	94
62	Cecdat, Inc.	135
46	Checks To-Go	15
32	Cload Magazine	21
74	Club Soft	127
100	CompuCover	86
199	Computer Case Company	108
215	Computer City	23
288	Computer Connections	114
240	Computer Forms	108
299	Computer World	17
9	Computronics, Inc.	150, 151, 152, 153
10	Contract Services Associates	77
52	Cost Effective Computer Services	109
233	Cottage Software	123
170	Cottage Software	34
119	Crown Plastic Company	73
266	Crown Plastic Company	95
*	Cryptext Corp	91
7	Custom Computer Center	19
121	Custom Electronics	86
*	Cybernetics, Inc.	75
59	DC Software & Computer Products	84
44	Data Train, Inc.	17
274	Data-Trans	97
169	Datagraphics	34
222	Digibyte	108
308	Digital Timing Devices	115
*	Discovery Bay Software Co.	103
247	Diversified Computer Services	115
88	Documan Software	73
33	80-US Journal	117
*	80 Micro	83, 100, 160-161
58	Electronic Specialists	84
26	Electronic Systems	157
278	Emtrol Systems Inc.	103
225	En-Joy Computer Programs	86
40	Esmark Inc.	53
272	Essex Publishing	93
3	Exatron	Cov. IV
12	FMG Corporation	49
224	Fantastic Software	97
252	Ferin Enterprises	93
133	Full Service Accounting & Processing	135
279	Futureview Unlimited	125
203	G.P. Associates	113
254	Galactic Software Ltd.	57
206	Garner's Computer Center	133
79	Allen Gelder Software	133
75	Godbout	73
218	Good-Lyddon Data Systems	129
270	Mark Gordon Computers	68
93	Granite State Instrument Co.	123
248	The Hardware Company	63
23	Hobby World	155
103	Howe Software	113
37	IJG Inc.	89
300	Information Technology Systems	107
301	Information Technology Systems	107
305	Insiders Software Consultants Inc.	50
2	Instant Software	Cov. III, 59, 60
202	Interactive Microware	131
246	Interface, Inc.	103
287	Interlude	9
187	International Software Associates	85
249	JMS Corp.	125
190	JPC Products Company	145
193	Joe Computer	119
293	Johnson Associates	70
85	Johnson Associates	131
226	Johnson Data	107
*	Kilobaud Microcomputing	109
149	Kogyosha Co. Ltd.	127
53	LNW Research	107
14	Level IV Products, Inc.	25
15	Lobo Drives International	51
178	Lobo Drives International	35, 36
158	MOM's	158, 159
95	Andrew Machen	110
163	Macrotronics	35
268	Maine Software	115
213	Management Services	64
90	Manhattan Software, Inc.	133
16	Matchless Systems	61
128	MED Systems Software	64
174	Mediamix	36
104	Mercer Systems, Inc.	90
20	Meta Technologies Corp.	6, 7
54	Micro Architect	85
176	Micro Architect	35
250	Micro Business World	123
214	The Micro Clinic	63
89	Micro Learningware	86
72	Micro Management Systems Inc.	105
68	Micro Matrix	67
29	Micro Mega	43
28	Microcomputer Tech. Inc.	27
73	Micron, Inc.	119
306	The Microperipheral Corp.	135
123	MicroPhase Systems	154
112	Miller Microcomputer Services	86
24	Mini Micro Mart, Inc.	156
221	MISOSYS	63
285	Mullen Computer Products	133
144	Mumford Micro Systems	52
143	NEECO	47
132	National Software Marketing, Inc.	114
142	National Tricor, Inc.	135
216	National Tricor, Inc.	135
116	Newby Software Development Co.	64
74	Northeast Microware	129
296	Orange Micro	121
108	Orthon Computers	64
96	PCD Systems	76
228	Palomar Software	103
207	Pensadyne	63
1	Percom Data Company	Cov. II
258	Percom Data Company	3
43	The Peripheral People	113
165	Personal Finance Systems	36
273	Pickles & Trout	117
237	Professional Data Corp.	105
17	The Program Store/Realsoft	71
21	Programma International	79
269	Quant Systems	90, 121
304	Quarp Publishing	139
41	Racet Computes	57
64	Radio Shack Authorized Sales Center	101
256	Radio Shack Dealer (TN)	119
241	Rational Software	110
307	Rational Software	115
197	Reliable Computer Resources	127
70	REMsoft Inc.	131
276	Richcraft Engineering Ltd.	154
191	Rondure Company	70
271	S-C Computer Technology	90
244	SJW, Inc.	115
154	S&M Systems Inc.	125
291	Scientific Engineering Lab.	113
280	SciTronics, Inc.	110
290	Semi-Soft	127
297	Service Technology	139
255	Michael Shrayer Software, Inc.	81
167	Michael Shrayer Software, Inc.	36
19	Simutek	87
67	Sirius Systems	91
18	Small Business Systems Group	13
30	Small Systems Software	95
232	SNAPP, Inc.	105
42	Software Etc.	4
284	Software Exchange	129
286	The Software Mart	119
277	Solutions 80	154
275	Speedway Electronics	123
164	Standard Systems Corp.	35
189	Statcom, Inc.	119
227	Stiles Computer Systems	86
82	Sturdivant & Dunn, Inc.	93
267	Suma Microware	121
217	Sumware	97
151	Sun-Technology, Inc.	95
211	Synergistic Solar, Inc.	64
148	TAB Sales Co.	121
45	Taranto & Associates	73
162	Taranto & Associates	35
147	Task Computer Applications	139
220	Task Computer Applications	139
303	Tora Systems Limited	149
84	The Ultimate Computer Systems	125
292	Universal Interface	63
177	Univair, Inc.	35
31	VR Data Corporation	89
111	Vern Street Products	93
65	The Vista Computer Co.	30, 31
180	The Vista Computer Co.	34, 35
27	Web Assoc.	33
230	Woodland-Hafner Associates	105

*This advertiser prefers to be contacted directly.

Ask for Instant Software at a computer store near you.

Alabama

Anderson Computers
3156 University Dr., Huntsville

Computerland of Huntsville
3020 University Dr., Huntsville

Olensky Bros.
3763 Airport Blvd., Mobile

Arizona

Ham Shack
450 6-A N. 16th St., Phoenix

Millets TV & Radio
621 East Broadway, Mesa

California

Byte Shop
8038 Clairmont Mesa Blvd.,
San Diego

Byte Shop
123 E. Yorba Linda, Placentia

Byte Shop of Mt. View
1415 West El Camino Real, Mt. View

Byte Shop of Sacramento
6041 Greenback Ln., Citrus Heights

Capital Computer Systems
3396 El Camino Ave., Sacramento

Computers Made Easy
819 East Ave. Q-9, Palmdale

Computer Store of San Leandro
701 MacArthur Blvd., San Leandro

Computer World
6791 Westminster Ave., Westminster

Computerland
16720 S. Hawthorne, Lawndale

Computerland of W. LA
6840 La Cienega Blvd., Inglewood

Coast Electronics
3118 No. Main St., Morro Bay

Computerland
24001 via Fabricante No 904,
Mission Viejo

Hobbi-tronics
1378 So. Bascom Ave., San Jose

Hobby World
19511 Business Ctr. Dr., Unit 6
Borthridge

I.C.E. House Inc.
398 North E. St., San Bernardino

Jade Computer Products
4901 W. Rosecrans, Hawthorne

Marlam Co.
6351 Almaden Rd., San Jose

Opamp/Technical Books
1033 N. Sycamore Ave., Los Angeles

Q.I. Computers, Inc.
15818 Hawthorne Blvd., Lawndale

Radio Shack Dealer
8250 Mira Mesa Blvd., San Diego

Radio Shack Dealer
50 N. Cabrillo Hwy., Half Moon Bay

Santa Rosa Computer Center
604 7th St., Santa Rosa

Silver Spur Elect. Comm.
13552 Central Ave., Chino

The Computer Store
820 Broadway, Santa Monica

Colorado

Byte Shop
3464 S. Acoma St., Englewood

Colorado Computer Systems
311 W. 74th Ave., Westminster

Computerland of North Denver
8749 Wadsworth Blvd., Arvada

Computer Shack
1635 South Prairie, Pueblo

The Computer Store
2300 Welton St., Denver

Connecticut

American Business Computers
454 Thames St., Groton

Computerlab
130 Jefferson, New London

Computerland
1700 Post Rd., Fairfield

Computerland
60 Skiff St., Hamden

Computer Works
1439 Post Rd. E., Liberty Plaza,
Westport

D.C.

The Program Store
4200 Wisconsin Ave., N.W.,
Washington, D.C.

Florida

Adventure International
200 Bald Cypress Ct., Longwood

AMF Electronics
11146 N. 30th St., Tampa

Boyd-Ebert Corporation
1328 West 15th St., Panama City

Computer Center
6578 Central Ave., St. Petersburg

Computerland of Ft. Lauderdale
3963 N. Federal Hwy., Ft. Lauderdale

Computerland of Jacksonville
2777-6 University Blvd. W.
Jacksonville

Computerland of Tampa
1520 E. Fowler Ave., Tampa

Computer Shack
3336 Beach Blvd., Jacksonville

Curtis Waters Enterprises
236 Talbot Ave., Melbourne

Heath Kit Electronic
4705 W. 16th Ave. Center, Hialeah

HIS Computermation
1295 Cypress Ave., Melbourne

Sound Ideas
2201-C N.W. 13th, Gainesville

Ukatan Computer Store
Airport Rd., Destin

Williams Radio & TV Inc.
2062 Liberty St., Jacksonville

Georgia

Atlanta Computer Mart
Atlanta

Computerland of Atlanta
2423 Cobb Parkway, Smyrna

Hawaii

Computerland of Hawaii
567 N. Federal Hwy., Honolulu

Radio Shack Assoc. Store
1712 S. King St., Honolulu

Idaho

Electronic Specialists
8411 Fairview Ave., Boise

Illinois

Computerland
4507 North Sterling, Peoria

Computerland
9511 N. Milwaukee Ave., Niles

Computer Station
3659 Nameoki Rd., Granite City

Midwest Micro Computers, Inc.
708 S. Main St., Lombard

Kansas

Central Kansas Computers
6 S. Broadway, Herington

Maine

Main Computronics
Intown Plaza, Bangor

Radio Shack
315 Main Mall Rd., So. Portland

Maryland

Jack Fives Electronics
4608 Debilen Circle, Pikesville

The Comm Center
9624 Ft. Meade Rd., Laurel

Massachusetts

ComputerCity
175 Main St., Charlestown

ComputerCity
50 Worcester Rd., Framingham

Computerland of Boston
214 Worcester Rd., Wellesley

Computer Packages Unlimited
244 W. Boylston St., West Boylston

Lighthouse Computer Software
14 Fall River Ave., Rehobath

New England Electronics Co.
679 Highland Ave., Needham

The Computer Store
120 Cambridge St., Burlington

Tufts Radio & Electronics
206 Mystic Ave., Medford

Michigan

Computer Center
28251 Ford Rd., Garden City

Computer Connections
38437 Grand River, Farmington Hills

Computerland of Grand Rapids
2927 28th St. S.E., Kentwood

Computerland of Rochester
301 S. Livernois, Rochester

Computerland of Southfield
29673 Northwestern Hwy., Southfield

Computer Mart
560 W. 14 Mile Rd., Clawson

Hobby House
1035 W. Territorial Rd., Battle Creek

The Alternate Source
1806 Ada, Lansing

Ye Olde Teacher Shoppe
1823 Witmyre St., Ypsilanti

Minnesota

Computerland of Hopkins
11319 Hwy F., Hopkins

Digital Den
Burnsville Center

Minnesota Software Inc.
5422 Fisher St., White Bear Lake

Zim Computers
5717 Xerxes Ave., N. Brooklin Center

Mississippi

Dyer's, Inc.
200 E. Main St., West Point

Softwarehouse
816 Foley St., Jackson

W. Vernon Foster Inc.
816 Foley St., Jackson

Missouri

Computervan, Inc.
51 Florissant Oaks Shopping Center
Florissant

Consolidated Software
16501 Greenwald Court, Belton

Montana

Intermountain Computer
529 So. 9th St., Livingston

Personal Computer
121 Red Oak Dr., Carl Junction

The Computer Store
1216 16th St. W. #35, Billings

Nebraska

Computerland of Omaha
11031 Elm St., Omaha

Midwest Computer Co. Inc.
8625 I St., Omaha

Midwest Computer Co. Inc.
4442 S. 84th St., Omaha

Midwest Computer Co. Inc.
4403 S. 87th St., Omaha

Scottsbluff Typewriters Inc.
1824 Broadway, Scottsbluff

Nevada

Century 23
4566 Spring Mountain Rd., Las Vegas

New Hampshire

Bitsnbytes Computer Center
568 Pleasant St., Concord

ComputerCity
1525 S. Willow, Manchester

Paul's TV
Main St., Fremont

Portsmouth Computer Center
31 Raynes Ave., Portsmouth

Radio Shack Assoc. Store
Fairbanks Plaza, Keene

New Jersey

Computer Encounter
2 Nassau St., Princeton

Computerland
35 Plaza Rte. #4, W. Paramus

Computer Mart of NJ
501 Rte. 27, Iselin

Dave's Electronics
Pennsville Shopping Ctr., Pennsville

GHB Enterprises Inc.
Rte. 38, Rudderaw Ave., Mapleshade

Personal Computing Inc.
51 Central Sq., Linwood

Radio Shack/J&J Electronic
Mansfield Shopping Ctr.
Rt. 57 Allen Rd., Hackettstown

The Bargain Brothers
Glen Roc Shopping Center
216 Scotch Road, Trenton

The Computer Emporium
Bldg. 103, Avenues of Commerce
2428 Rte. 38, Cherry Hill

New Mexico

Autel Electronics Co.
232 Wisconsin N.E., Albuquerque

Legey and Associates
2908 Tahiti Ct. N.E., Albuquerque

Mitchell's Music (Radio Shack)
407 W. Church, Carlsbad

South West Computer Center
121 Wyatt Drive, Suite 7, Las Cruces

New York

Aristo Craft
314 Fifth Ave., NYC

Bits & Bytes
2800 Straight Rd., Fredonia

Computer Corner
200 Hamilton Ave., White Plains

Computer Era Corp.
1570 3rd Ave., New York

Computer Factory
485 Lexington Ave., NYC

Computer House, Inc.
721 Atlantic Ave., Rochester

Computerland of Nassau
79 Westbury Ave., Carle Place

Computer World
519 Boston Post Rd., Port Chester

Comtek Electronics, Inc.
2666 Coney Island Ave., Brooklyn

Comtek Electronics, Inc.
Staten Island Mall
Store 220A, Staten Island

Digibyte Systems Corp.
31E. 31st St., New York

Home Computer Center
671 Monroe Ave., Rochester

Key Electronics
Schenectady

Lashen Electronics Inc.
21 Broadway, Denville

Mr. Computer
Imp. Plaza, Rte. 9, Wappingers Falls

Softron Systems
308 Columbia Turnpike, Rensselaer

The Computer Tree Inc.
409 Hooper Rd., Endwell

Upstate Computer Shop
629 French Rd., Campus Plaza
New Hartford

North Carolina

Byte Shop of Raleigh
1213 Hillsborough St., Raleigh

Ohio

Altair Business Systems, Inc.
5252 North Dixie Dr., Dayton

Astro Video Electronics
504 E. Main St., Lancaster

Cincinnati Computer Store
4816 Interstate Dr., Cincinnati

Computerland
4579 Great Northern Blvd.,
N.Olmstead

Computerland
6429 Busch Blvd., Columbus

Computerland
1288 Som Rd., Mayfield Heights

Computer Store of Toledo
18 Hillwyck Dr., Toledo

Forbees Microsystems Inc.
35 N. Broad, Fairborn

Microcomputer Center
7900 Paragon Rd., Dayton

Micro-Mini Computer World
74 Robinwood, Columbus

Universal Amateur Radio, Inc.
1280 Aida Dr., Columbus

Oklahoma

Sounds, Etc.
Hyw. 33, Watonga

Vern Street Products
Radio Shack Dealer
114 W. Taft St., Sapulpa

Oregon

Computerland of Portland
12020 S.W. Main St., Tigard

Computer Pathways Unlimited, Inc.
2151 Davcor St. S.E., Salem

TRS-80 Products Ltd.
3520 S.E. Vineyard Rd., Portland

Pennsylvania

Artco Elect.
302 Wyoming Ave., Kingston

Artco Elect.
Back Mountain Shop. Ctr.
Shavertown

Audio Mart
518 Fifth Ave., New Brighton

Computer Workshoppe
3848 William Penn Hwy, Monroeville

Computerland of Harrisburg
4644 Carlisle Pike, Mechanicsburg

Erie Computer Co.
2127 West 8th St., Erie

Mighty Byte Computer Center
537 Easton Rd., Horsham

Personal Computer Corp.
24-26 West Lancaster Ave., Paoli

Personal Computer Corp.
Frazer Mall, Lancaster Ave., Frazer

Rhode Island

Computer City
165 Angell St., Providence

South Dakota

CB Radio Shack
21st and Broadway, Yankton

Tennessee

Computerlab
671 S. Menden Hall Rd., Memphis

H & H Electronics Inc.
509 N. Jackson St., Tullahoma

Texas

Computer Port
926 N. Collins, Arlington

Houston Computer Tech
5313 Bissonet, Bellarie

Interactive Computer
7620 Dashwood, Houston

K.A. Elect.
9090 Stemmons Frwy., Dallas

Pan American Elect. Inc.
1117 Conway, Mission

Radio Shack Dealer
21969 Katy Freeway, Katy

Ram Micro Systems
6353 Camp Bowie Blvd., Ft. Worth

Waghalter Books Inc.
3 Greenway Plaza E., Houston

Utah

DC Computer Co.
1911 West 70 South, Provo

Quality Technology
470 E. 2nd So., Salt Lake City

Virginia

Computer Works
Rte. 6, Box 65A, Harrisonburg

Home Computer Center
2927 Virginia Beach Blvd.
Virginia Beach

Southside Radio Comm.
135 Pickwick Ave., Colonial Heights

Washington

American Mercantile Co. Inc.
2418 1st Ave. S., Seattle

Byte Shop of Bellevue
14701 N.E. 20th St., Bellevue

Computerland of South King Co.
1500 S. 336 St., Suite 12
Federal Way

Magnolia Micro Systems
2812 Thorndyke Ave., Seattle

Personal Computers
S 104 Freva, Spokane

Ye Old Computer Shop
1301 G. Washington, Richland

West Virginia

The Computer Corner Inc.
22 Beechurst Ave., Morgantown

The Computer Store
Municipal Parking Bldg., Charleston

Wisconsin

Byte Shop Of Milwaukee
6019 West Layton Ave., Greenfield

Computerland
690 S. Whitney Way, Madison

Petted Microsystems
4265 W. Loomis Rd., Milwaukee

Wyoming

Computer Concepts
1104 Logan Ave., Cheyenne

Puerto Rico

The Microcomputer Store
1568 Ave. Jesus T. Pinero
Caparra Terrace

Canada

CANADIAN DISTRIBUTORS:
Micron Distributing
409 Queen St., W. Toronto, Ont.
M5V 2A5

Computerland of Winnipeg
715 Portage Ave., Winnipeg, Man.

Compumart
411 Roosevelt Ave., Ottawa, Ontario

Micromatic Systems Inc.
101 8136 Park Rd., Richmond, B.C.

Micro Shack of W. Canada
333 Park Street, Regina, Sask.

Orthon Holdings Ltd.
12411 Stony Plain Road
Edmonton, Alberta

Total Computer Systems
Ajax, Ontario

Austria

Byte Shop Microelectronic
Favoritenstr. 20, Wien

England

Mighty Micro
33 Cardiff Rd., Watford Herts

France

Sivea s.a.
20, Rue de Leningrad, Paris

Italy

HOMIC s.r.l.
Piazza De Angeli 1, Milano

Switzerland

Tandy Corp.
Baslerstr. 145, Zuerich

West Germany

EUROPEAN DISTRIBUTOR:
Microshop Bodensee
Markstr. 3, 7778 Markdorf

AAA-Electronic
Habsburgerstr. 134, Freiburg

Basic Software und Schulung
Constantinstr. 88, Koeln 21

Electronic Hobby Shop
Maximilianstr. 22, Bonn

Henniger Computers
Landwehrstr. 39, Muenchen 2

Microcomputer Center
Alsfelderstr. 7, Darmstadt

Muenzenlohr
Toelzerstr. 5, Holzkirchen

R + R Electronic
Adlerstr. 55, Heidelberg

Australia

Computer Country Pty Ltd.
5 Tonkin Ave., Balwyn VIC

Deforest Software
36 Glen Tower Drive
Glen Waverly, VIC.

Sure-Load Software
P.O. Box 26, Weston, A.C.T.

South Africa

SOUTH AFRICAN DISTRIBUTOR:
Eddie Talberg
P.O. Box 745, Johannesburg

Instant Software™ Inc. Peterborough, N.H. 03458

✓40



STARTER KIT

EXATRON STRINGY FLOPPY FOR THE TRS-80

Recommended initial purchase:

Exatron Stringy Floppy	$249.50
3 Wafers each: 5', 10', 20', 50'	40.00
Bus Extender, 2-for-1	15.00
ESF Machine Language Monitor	9.95
Wafer Organizer	5.00
	$319.45

SPECIAL PRICE FOR THIS STARTER KIT	$299.50
Sales Tax (California only)	
Shipping and Handling	5.50
TOTAL	

For more information see the current Exatron Stringy Floppy Owners Association Newsletter in *Microcomputing*.

If you have any questions about the product, about Exatron, or ESFOA, please call the Hot Line. Address letters to ESFOA, 3559 Ryder St., Santa Clara, CA 95051.

Stringy Floppy is a trademark of Exatron Corporation.

HOT LINE (For Calls Outside CA) 800-538-8559

excellence in electronics

exatron

3555 Ryder Street ▪ Santa Clara, California 95051
(408) 737-7111